

Alphabet of light Gople System

by
BIG - Bjarke Ingels Group



Artemide®

Authors

BIG - Bjarke Ingels Group

BIG is a Copenhagen, New York, London and Barcelona based group of architects, designers, urbanists, landscape professionals, interior and product designers, researchers and inventors. The office is currently involved in a large number of projects throughout Europe, North America, Asia and the Middle East.

BIG's architecture emerges out of a careful analysis of how contemporary life constantly evolves and changes. Not least due to the influence from multicultural exchange, global economical flows and communication technologies, that all together require new ways of architectural and urban organization. They believe that in order to deal with today's challenges, architecture can profitably move into a field that has been largely unexplored. A pragmatic utopian architecture that steers clear of the petrifying pragmatism of boring boxes and the naïve utopian ideas of digital formalism. Like a form of programmatic alchemy, they create architecture by mixing conventional ingredients such as living, leisure, working, parking and shopping. By hitting the fertile overlap between pragmatic and utopia, we architects once again find the freedom to change the surface of our planet, to better fit contemporary life forms.



Alphabet of light

BIG - Bjarke Ingels Group
2016

Alphabet of light system is a lighting language that continues to grow with new curved elements so it can be developed with increasing freedom throughout space. It is a basic principle that generates an open system implementing just a handful of basic modules.

Thanks to specific geometric proportions, these modules can be combined together to form endless lighting structures, from the most elemental to the most complex, both linear and curved. The BIG idea is combined with Artemide's optoelectronic expertise to give rise to an innovative construction principle that casts continuous and comfortable light.

It is a minimal presence that conceals ultra-sophisticated optoelectronic and patented mechanical innovation as well as ground-breaking control. The system can be controlled using the Artemide App to create freedom both in geometric design and in the definition of dynamic performance levels, which can be programmed or modified in real time. BIG designed a new font, an alphabet that can be used to write and express one's thoughts, establish an identity and guide visitors through a space using light. It can help give shape to a wide range of locations and public spaces, from hotels and offices to universities and hospitals.



**Artemide
App**



For further information on Alphabet of light
→ visit artemide.com













Alphabet of light System

- Patent pending for optics
- Patent pending for the mechanical and electrical connection











Huawei offices, project by Progetto CMR, Milan, Ph. Paolo Rionzi | 2019



ZOGENIX

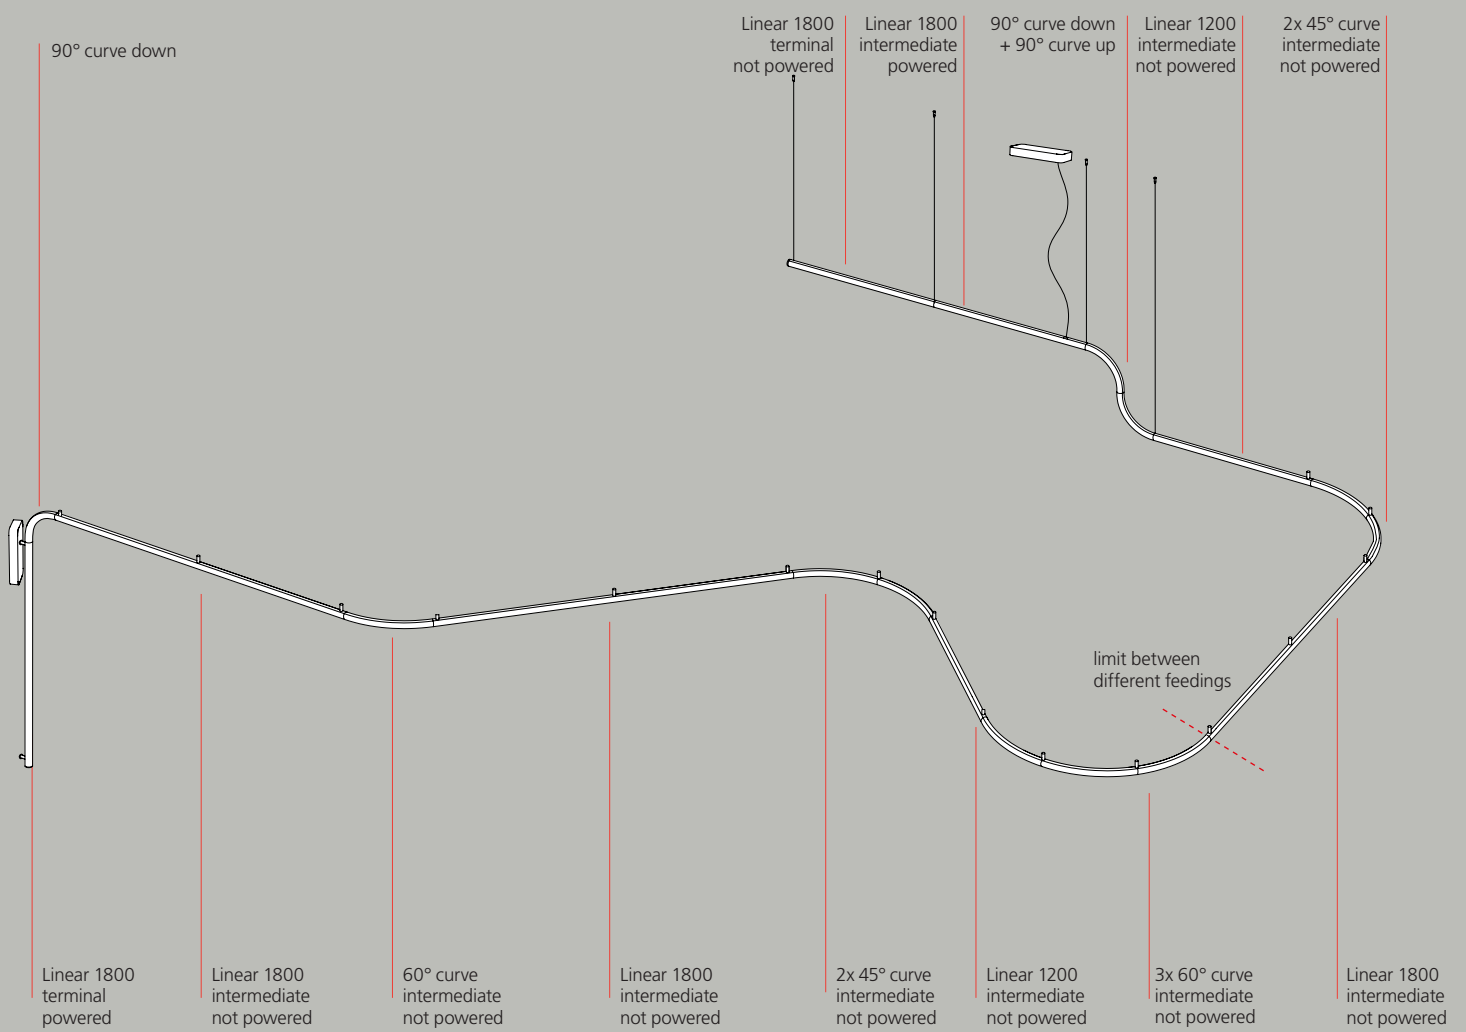

Alphabet of light System configuration

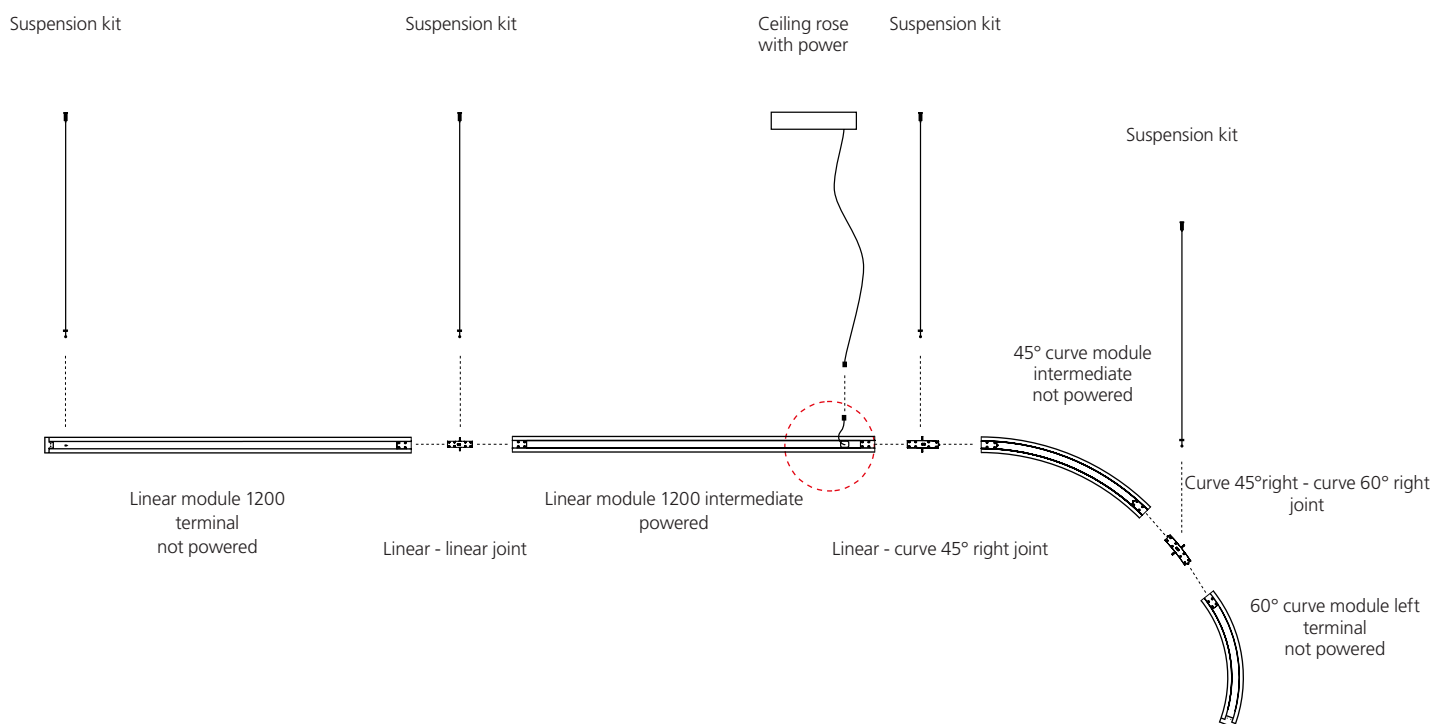

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA .

Linear module are available in three lengths: L 600 / 1200 / 1800 mm

Possibility to articulate the configuration on the horizontal plane with 45° and 60° curves and on the vertical plane with 90° curves.

Max 10 m for each power unit (10 m in one direction or X+Y=10 m in both directions).


Dali / 1-10 / Push or APP dimmable power units, recessed or ceiling mounted.

All modules powered by same power unit will use the same dimming.


Suspension modules

→ LINEAR ELEMENTS


600 mm terminal




600 mm intermediate




1200 mm terminal



1200 mm intermediate



1800 mm terminal



1800 mm intermediate




→ CURVED ELEMENTS


45° terminal right



45° terminal left

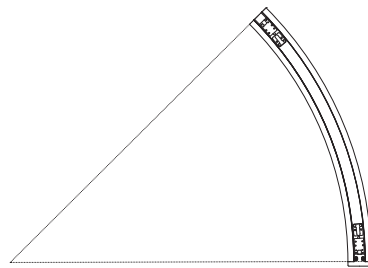


45° intermediate

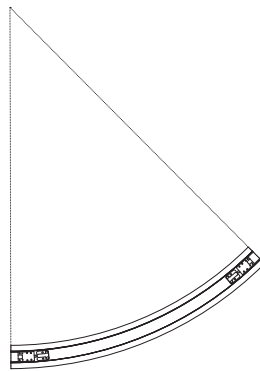

→ VERTICAL ELEMENTS


90° Vertical UP




60° terminal right




60° terminal left



60° intermediate



90° Vertical DOWN



↪ ALPHABET OF LIGHT - SYSTEM

Opal White



XF



MacAdam 2SDCM
Life L80 (12K) 72000h
CRI =80

IP20



SUSPENSION LINEAR ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Not powered Code
600 mm terminal	11 W	24V	977 lm	3000K 3500K	2100010A 2100C10A	2101010A 2101C10A
600 mm intermediate	11 W	24V	977 lm	3000K 3500K		2102010A 2102C10A
1200 mm terminal	21 W	24V	1934 lm	3000K 3500K	2104010A 2104C10A	2106010A 2106C10A
1200 mm intermediate	21 W	24V	1934 lm	3000K 3500K	2105010A 2105C10A	2107010A 2107C10A
1800 mm terminal	33 W	24V	2931 lm	3000K 3500K	2108010A 2108C10A	2110010A 2110C10A
1800 mm intermediate	33 W	24V	2931 lm	3000K 3500K	2109010A 2109C10A	2111010A 2111C10A

SUSPENSION CURVED ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Not powered Code
45° terminal left	11 W	24V	964 lm	3000K 3500K	2112010A 2112C10A	2115010A 2115C10A
45° terminal right	11 W	24V	964 lm	3000K 3500K	2113010A 2113C10A	2116010A 2116C10A
45° intermediate	11 W	24V	964 lm	3000K 3500K	2114010A 2114C10A	2117010A 2117C10A
60° terminal left	8 W	24V	691 lm	3000K 3500K	2118010A 2118C10A	2121010A 2121C10A
60° terminal right	8 W	24V	691 lm	3000K 3500K	2119010A 2119C10A	2122010A 2122C10A
60° intermediate	8 W	24V	691 lm	3000K 3500K	2120010A 2120C10A	2123010A 2123C10A

VERTICAL ELEMENTS

Length	W	V	Flux	CCT	Not powered Code
90° vertical UP	8 W	24V	636 lm	3000K 3500K	2124010A 2124C10A
90° vertical DOWN	8 W	24V	612 lm	3000K 3500K	2125010A 2125C10A

Suspension accessories	Code
Suspension kit L=1,50m	2266010A
Suspension kit L=4,00m	2273010A
*extension feeding cable L=1,25m	2274010A
*extension feeding cable L=2,50m	2275010A

*The total maximum length of the feeding cable is 4,00 m (either for ceiling mounted or remote power units).
Overpassing this value could affect uniformity of light emission.

Suspension Power Units

	Code
Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	2267010A
APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	2267010APP
Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	2272010A
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	2272010APP




Ø 160


Wall/ceiling modules

→ LINEAR ELEMENTS


600 mm terminal




600 mm intermediate




1200 mm terminal




1200 mm intermediate



1800 mm terminal



1800 mm intermediate



→ CURVED ELEMENTS

45° terminal right



45° terminal left







45° intermediate




→ VERTICAL ELEMENTS

90° vertical UP

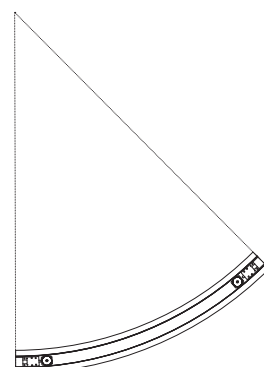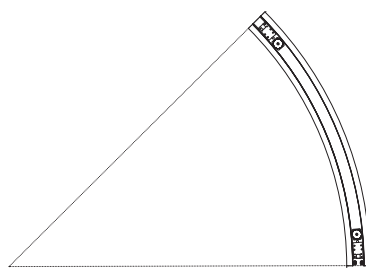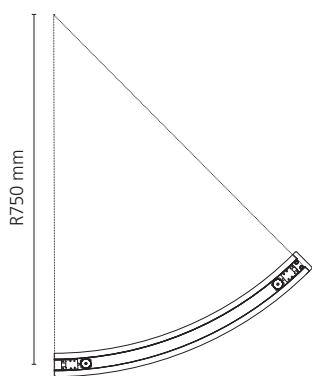

60° terminal right







60° terminal left



60° intermediate



90° vertical DOWN



↪ ALPHABET OF LIGHT - SYSTEM

Opal White



XF



MacAdam 2SDCM
Life L80 (12K) 72000h
CRI =80

IP20



WALL/CEILING LINEAR ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Semi-recessed powered Code	Not powered Code
600 mm terminal	11 W	24V	977 lm	3000K 3500K	2130010A 2130C10A	2160010A 2160C10A	2131010A 2131C10A 2132010A 2132C10A
600 mm intermediate	11 W	24V	977 lm	3000K 3500K			
1200 mm terminal	21 W	24V	1934 lm	3000K 3500K	2134010A 2134C10A	2161010A 2161C10A	2136010A 2136C10A
1200 mm intermediate	21 W	24V	1934 lm	3000K 3500K	2135010A 2135C10A	2162010A 2162C10A	2137010A 2137C10A
1800 mm terminal	33 W	24V	2931 lm	3000K 3500K	2138010A 2138C10A	2163010A 2163C10A	2140010A 2140C10A
1800 mm intermediate	33 W	24V	2931 lm	3000K 3500K	2139010A 2139C10A	2164010A 2164C10A	2141010A 2141C10A

WALL/CEILING CURVED ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Semi-recessed powered Code	Not powered Code
45° terminal left	11 W	24V	964 lm	3000K 3500K	2142010A 2142C10A	2165010A 2165C10A	2145010A 2145C10A
45° terminal right	11 W	24V	964 lm	3000K 3500K	2143010A 2143C10A	2166010A 2166C10A	2146010A 2146C10A
45° intermediate	11 W	24V	964 lm	3000K 3500K	2144010A 2144C10A	2167010A 2167C10A	2147010A 2147C10A
60° terminal left	8 W	24V	691 lm	3000K 3500K	2148010A 2148C10A	2168010A 2168C10A	2151010A 2151C10A
60° terminal right	8 W	24V	691 lm	3000K 3500K	2149010A 2149C10A	2169010A 2169C10A	2152010A 2152C10A
60° intermediate	8 W	24V	691 lm	3000K 3500K	2150010A 2150C10A	2170010A 2170C10A	2153010A 2153C10A

VERTICAL ELEMENTS

Length	W	V	Flux	CCT	Not powered Code
90° vertical UP	8 W	24V	636 lm	3000K 3500K	2124010A 2124C10A
90° vertical DOWN	8 W	24V	612 lm	3000K 3500K	2125010A 2125C10A

Wall/Ceiling Power Units

Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)
APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)
Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

Code

2268010A
2268010APP
2271010A
2271010APP



Ø 160

90° angle



↪ ALPHABET OF LIGHT - 90° ANGLE

Opal White

XF

MacAdam 2SDCM

Life L80 (10K) 55000h


CRI =80

IP20

⊕


SUSPENSION

W		CCT	Code
90° Angle	1,5 W	3000K	2154010A
		3500K	2154C10A



WALL/CEILING

W		CCT	Code
90° Angle	1,5 W	3000K	2154010A
		3500K	2155C10A



Joints

Zogenix, Emeryville, USA, ph. Emily Hagopian | 2020



↪ ALPHABET OF LIGHT - SYSTEM

Opal White



XF



MacAdam 2SDCM
Life L80 (12K) 72000h
CRI =80

IP20




JOINTS

Accessories	
Joint	Code
01 → Linear - linear joint ← Linear - linear joint	2250010A
02 → Linear - curve 45° right joint ← Curve 45° left - linear joint	2251010A
03 → Linear - curve 45° left joint ← Curve 45° right - linear joint	2252010A
04a → 45° curve right - 45° curve right joint ← 45° curve left - 45° curve left joint	2255010A
04b → 45° curve left - 45° curve left joint ← 45° curve right - 45° curve right joint	
05 → Linear - curve 60° right joint ← 60° curve left - linear joint	2253010A
06 → Linear - curve 60° left joint ← 60° curve right - linear joint	2254010A
07a → 60° curve right - 60° curve right joint ← 60° curve left - 60° curve left joint	2256010A
07b → 60° curve left - 60° curve left joint ← 60° curve right - 60° curve right joint	
08 → 60° curve right - 45° curve left joint ← 45° curve right - 60° curve left joint	2257010A
09 → 45° curve left - 45° curve right joint ← 45° curve left - 45° curve right joint	2260010A
10 → 60° curve right - 60° curve left joint ← 60° curve right - 60° curve left joint	2259010A
11 → 60° curve right - 45° curve right joint ← 45° curve left - 60° curve left joint	2261010A
12 → 60° curve left - 45° curve left joint ← 45° curve right - 60° curve right joint	2262010A
13 → 90° down - 90° up joint ← 90° up - 90° down joint	2263010A
14 → Linear - 90° vertical up joint ← 90° vertical up joint - linear joint	2264010A
15 → Linear - 90° vertical down joint ← 90° vertical down - linear joint	2265010A
16 → 60° curve left - 45° curve right joint ← 45° curve left - 60° curve right joint	2258010A
17 → 45° curve right - 45° curve left joint ← 45° curve right - 45° curve left joint	2269010A
18 → 60° curve left - 60° curve right joint ← 60° curve right - 60° curve left joint	2270010A


→ left to right path

← right to left path


→ left to right path
 ← right to left path

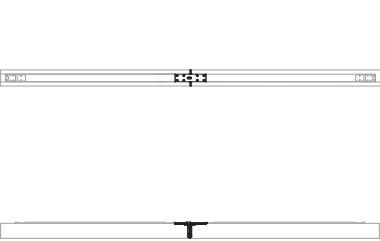

Code 2250010A_ **JOINT 01**
 → LINEAR - LINEAR JOINT
 ← LINEAR - LINEAR JOINT

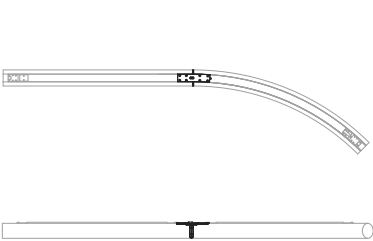


Code 2251010A_ **JOINT 02**
 → LINEAR - CURVE 45° RIGHT JOINT
 ← CURVE 45° LEFT - LINEAR JOINT

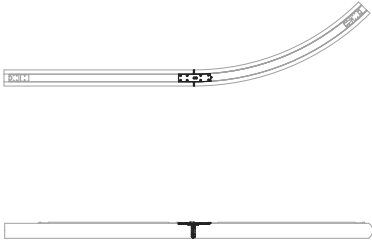


Code 2252010A_ **JOINT 03**
 → LINEAR - CURVE 45° LEFT JOINT
 ← CURVE 45° RIGHT - LINEAR JOINT




Code 2255010A_ **JOINT 04a**
 → 45° CURVE RIGHT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 45° CURVE LEFT JOINT

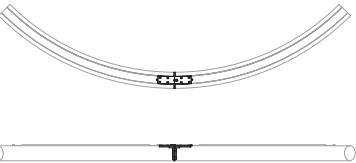

Code 2255010A_ **JOINT 04b**
 → 45° CURVE LEFT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 45° CURVE RIGHT JOINT




Code 2253010A_ **JOINT 05**
 → LINEAR - CURVE 60° RIGHT JOINT
 ← 60° CURVE LEFT - LINEAR JOINT RIGHT




Code 2254010A_ **JOINT 06**
 → LINEAR - CURVE 60° LEFT JOINT
 ← 60° CURVE RIGHT - LINEAR JOINT




Code 2256010A_ **JOINT 07a**
 → 60° CURVE RIGHT - 60° CURVE RIGHT JOINT
 ← 60° CURVE LEFT - 60° CURVE LEFT JOINT




Code 2256010A_ **JOINT 07b**
 → 60° CURVE LEFT - 60° CURVE LEFT JOINT
 ← 60° CURVE RIGHT - 60° CURVE RIGHT JOINT




Code 2257010A_ **JOINT 08**
 → 60° CURVE RIGHT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 60° CURVE LEFT JOINT



Code 2258010A_ **JOINT 16**
 → 60° CURVE LEFT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 60° CURVE RIGHT JOINT




Code 2259010A_ **JOINT 10**
 → 60° CURVE RIGHT - 60° CURVE LEFT JOINT
 ← 60° CURVE RIGHT - 60° CURVE LEFT JOINT




Code 2270010A_ **JOINT 18**
 → 60° CURVE LEFT - 60° CURVE RIGHT JOINT
 ← 60° CURVE LEFT - 60° CURVE RIGHT JOINT



Code 2261010A_ **JOINT 11**
 → 60° CURVE RIGHT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 60° CURVE LEFT JOINT



Code 2262010A_ **JOINT 12**
 → 60° CURVE LEFT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 60° CURVE RIGHT JOINT




Code 2263010A_ **JOINT 13**
 → 90° VERTICAL DOWN - 90° VERTICAL UP JOINT
 ← 90° VERTICAL UP - 90° VERTICAL DOWN JOINT




Code 2264010A_ **JOINT 14**
 → LINEAR - 90° VERTICAL UP JOINT
 ← 90° VERTICAL UP - LINEAR JOINT



Code 2265010A_ **JOINT 15**
 → LINEAR - 90° VERTICAL DOWN JOINT
 ← 90° VERTICAL DOWN - LINEAR JOINT



Code 2260010A_ **JOINT 09**
 → 45° CURVE LEFT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 45° CURVE RIGHT JOINT



Code 2269010A_ **JOINT 17**
 → 45° CURVE RIGHT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 45° CURVE LEFT JOINT





Alphabet of light Configurator

Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.

For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.

Alphabet of light System Configurator is useful tool to simplify the design of your composition.

After defining the layout of the space, the desired system can be created by reconstructing it with a practical drag and drop of the various modules available. Once the project is completed, the system returns a complete datasheet with all the details to proceed with the order.

1. Build your space

BACK

Before you start define the space where you are going to compose your system.

cm inches


How high is your room?

How wide is your room?

How deep is your room?

NEXT STEP

2. Drag and drop

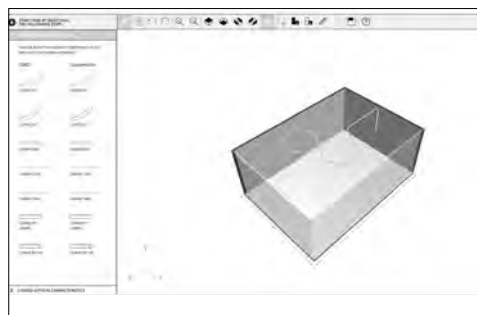

3. Save it and send it!

ALPHABET OF LIGHT

ALB01 - Square Light Group

ALPHABET OF LIGHT CONFIGURATOR

article 001 #1761

DESCRIPTION

ALB01 is a square light group for indoor use. It is composed of four square light fixtures arranged in a square pattern. It is available in three different colors: white, black, and grey. It is a modern and minimalist design that can be used in a variety of settings.

Color	Quantity	Light	Beam
White	4	20W	15°
Black	4	20W	15°
Grey	4	20W	15°

Color	Quantity	Light	Beam
White	4	20W	15°
Black	4	20W	15°
Grey	4	20W	15°

For the latest product information please visit www.artemide.com - April 2015

Artemide

Gople system

BIG - Bjarke Ingles Group
2020

Gople system combines with the Alphabet of light System, creating a universal lighting able to meet the requirements of any space, but above all to define a new approach to lighting projects.

This is an increasingly universal language that diversifies its performance and expands the freedom to illuminate every angle.

Gople Spot adds accent lights to break up the diffused light of Alphabet of light. Light thus follows spaces and activities not just by tracing geometries that move fluidly in three directions, but also through an alternation of light and shadow, the choice of light emissions that are diversified and specialised.


Alphabet of Light is a versatile, multi-use project, perfect for illuminating any space, which in combination with Gople system opens up new fields of application and increasingly becomes the ideal tool for retail spaces.

Gople Spot offers efficient performance, excellent colour rendering and numerous variables in terms of emission qualities such as colour temperature and beam angles, which make it a professional, technical product.



**Artemide
App**



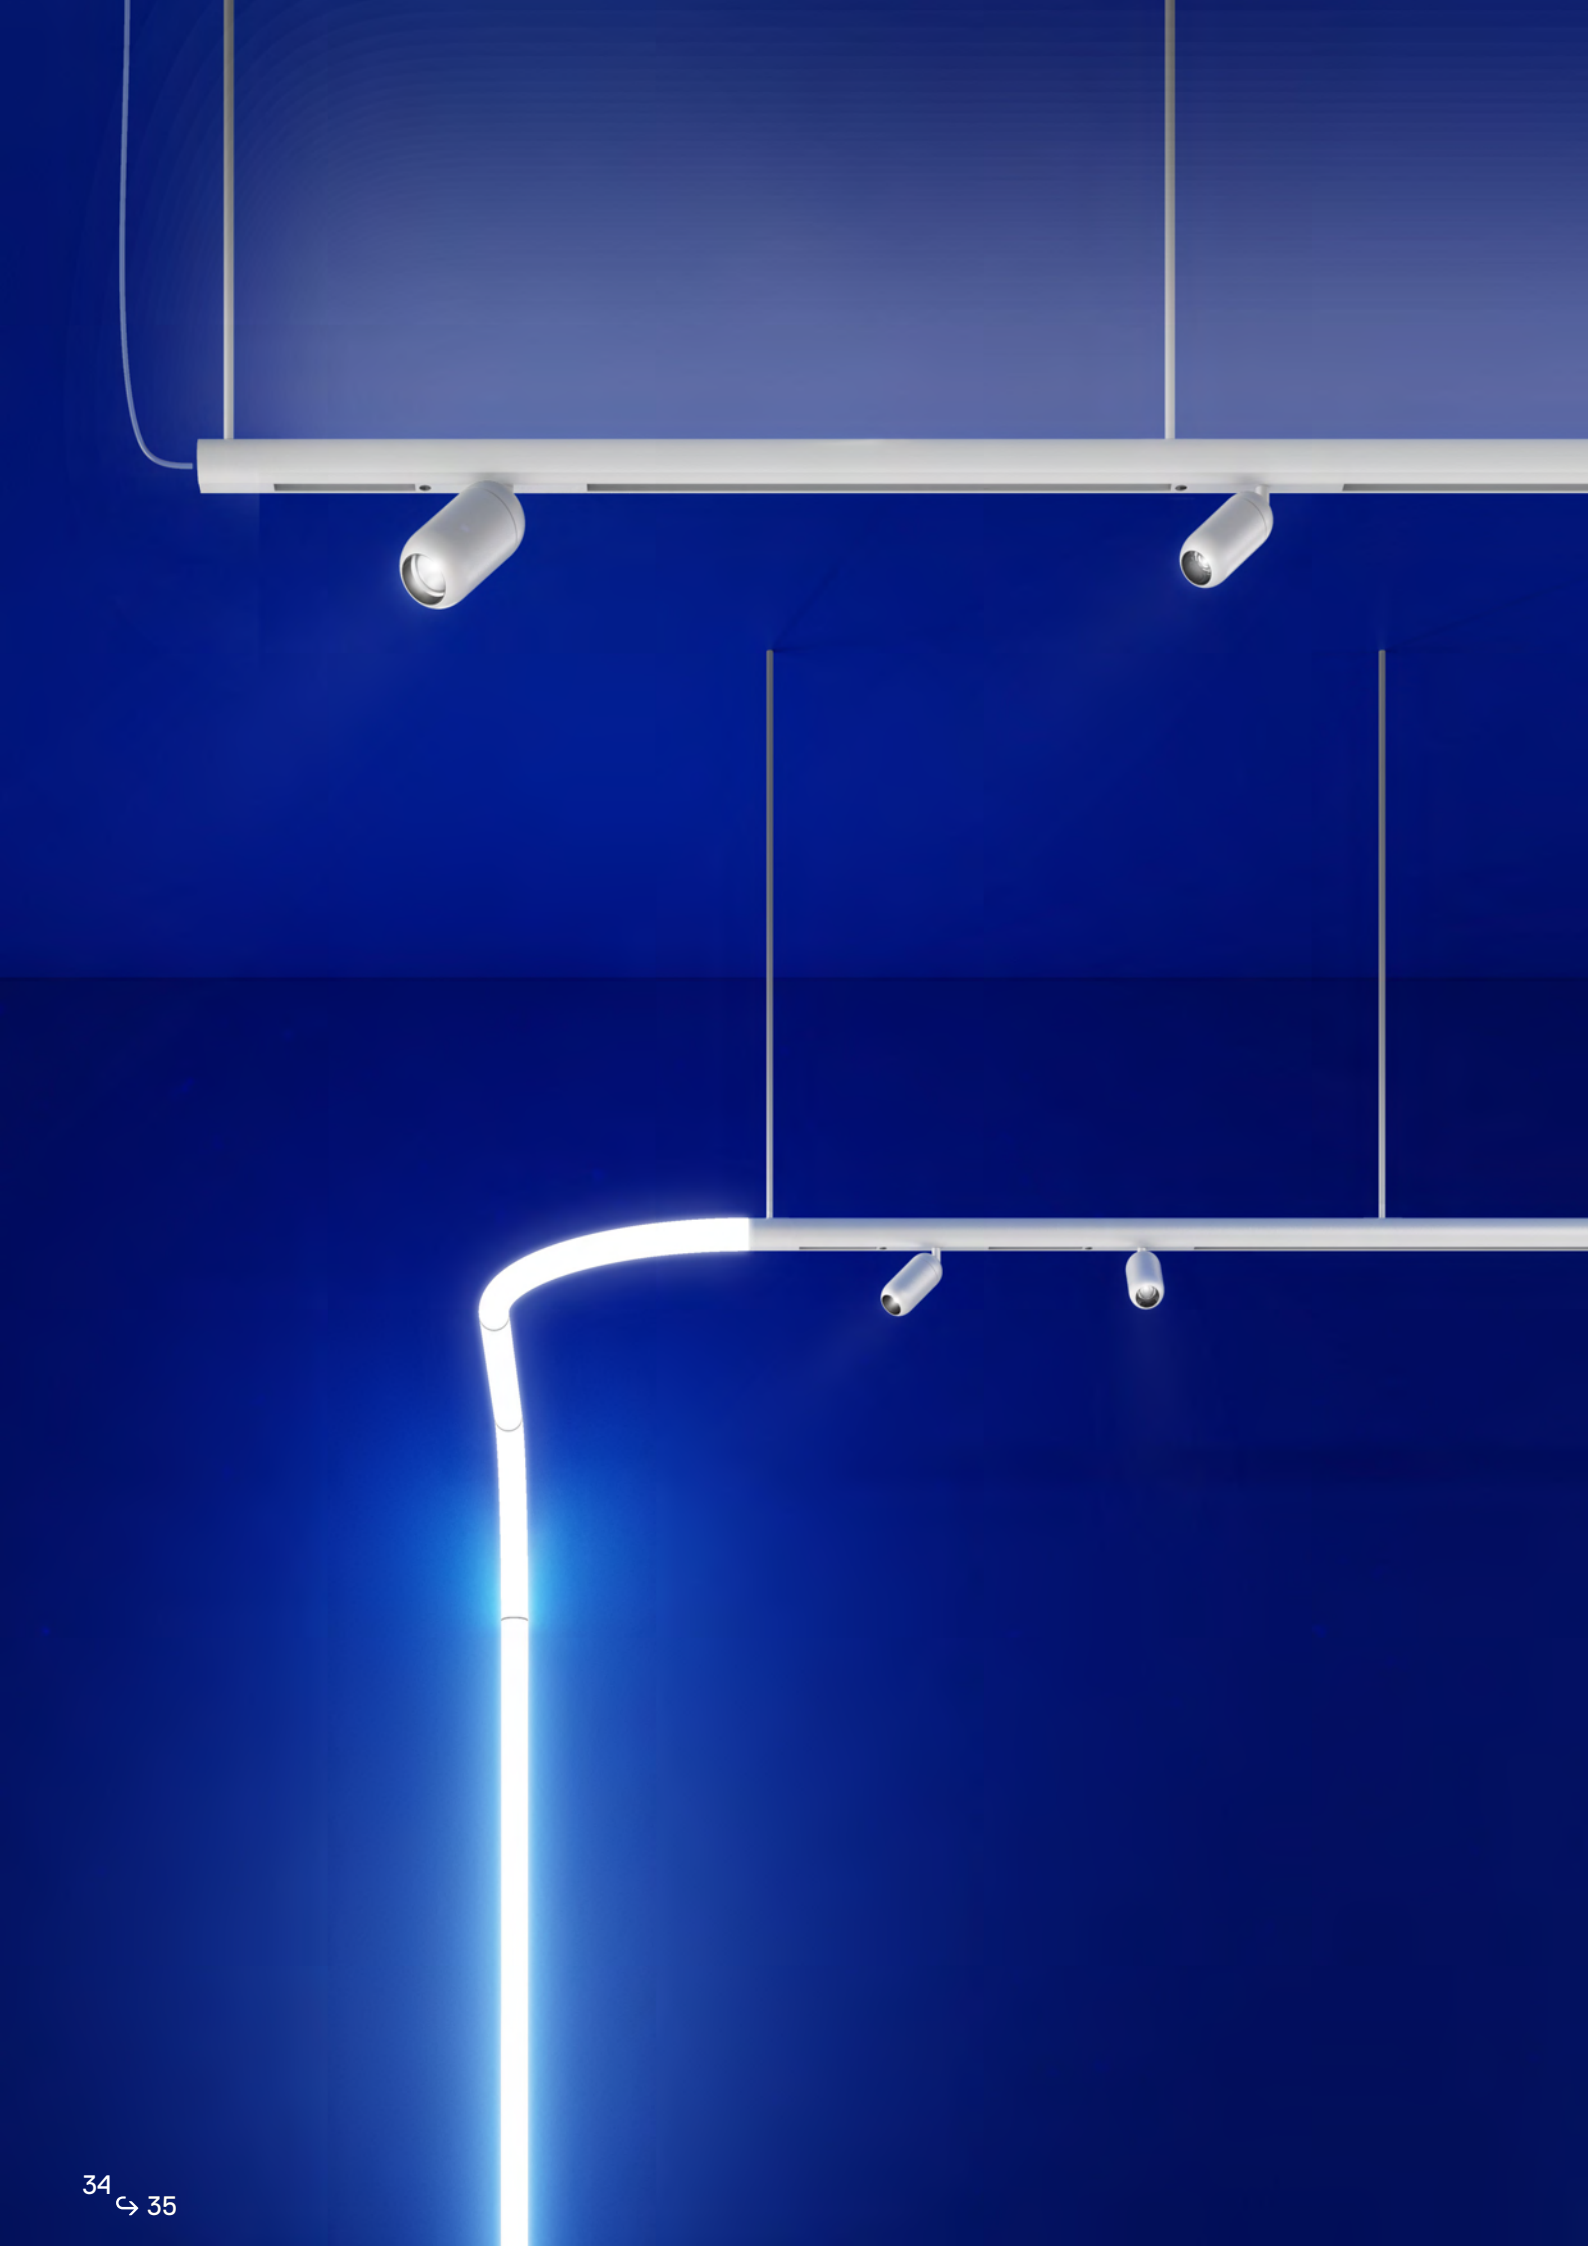



"The new Gople system follows the success of our original Gople pendant lamps, extending the language of Alphabet of light into new architectural typologies."

BIG

Complete system

Gople system is designed to allow double emission: it can accommodate Gople spot on an upper and lower track or have a track for direct- spot emission and a diffused indirect light.

The different typology of Gople System modules can be combined with the maximum freedom.

The same diameter of Alphabet of light and Gople system allows to combine the two systems with mechanical continuity.



ALPHABET OF LIGHT

24V


GOPLE SYSTEM
TRACK

48V





GOPLE SYSTEM
TRACK + INDIRECT

48V

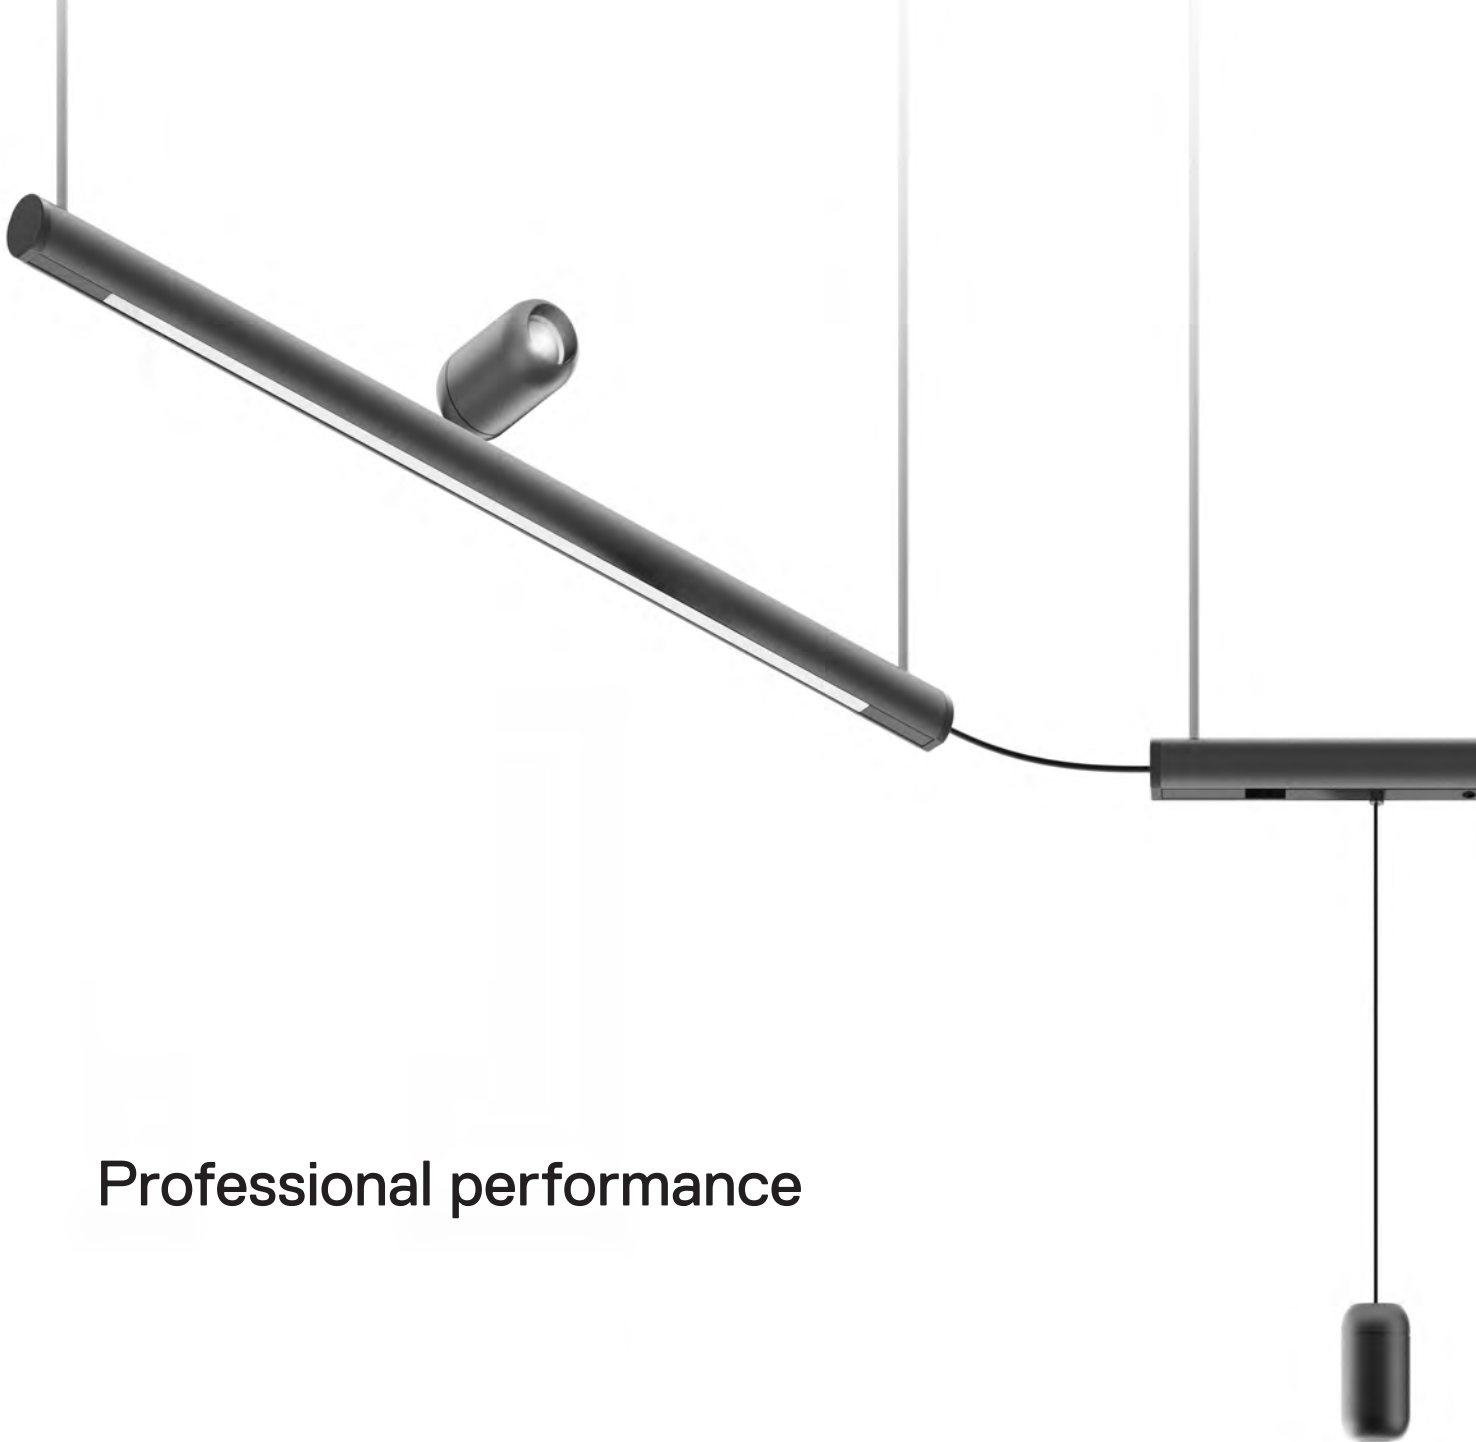

Professional performance

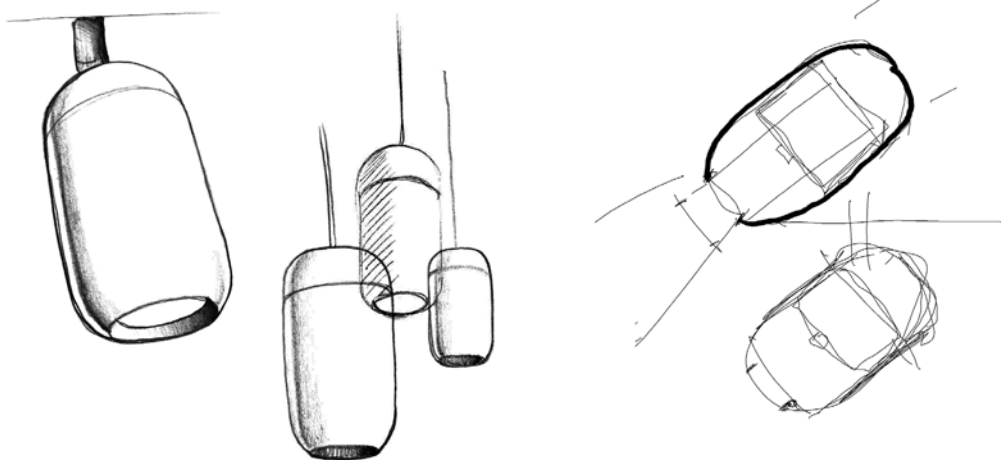

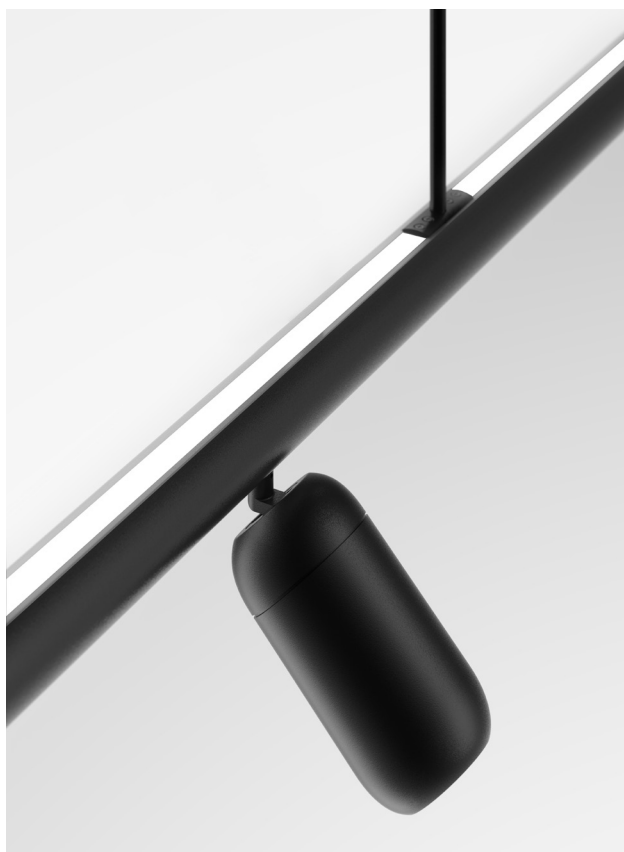

Gople Spot offers highly professional performance within the soft geometries that remind in reduced-scale the iconic Gople diffuser.

The spotlight comes in two sizes, corresponding to different power and flux levels, each with multiple beam angles.

Artemide's expertise in managing the different qualities of light is also expressed in the ability to personalise light emissions with custom solutions, selecting the parameters of colour rendering (Gamut index and Fidelity Index) and spectrum quality dedicated to specific display situations.





Gople Spot



GOPLE SPOT 60



S 13°	F 20°	WF 28°
9W	9W	9W
540 lm	584 lm	528 lm



GOPLE SPOT 80



S 16°	F 22°	WF 32°
23W	23W	23W
1492 lm	1465 lm	1596 lm



GOPLE SPOT PENDANT 60



S 13°	F 20°	WF 28°
9W	9W	9W
540 lm	584 lm	528 lm







GOPLE SPOT PENDANT 80



S 16°	F 22°	WF 32°
23W	23W	23W
1492 lm	1465 lm	1596 lm



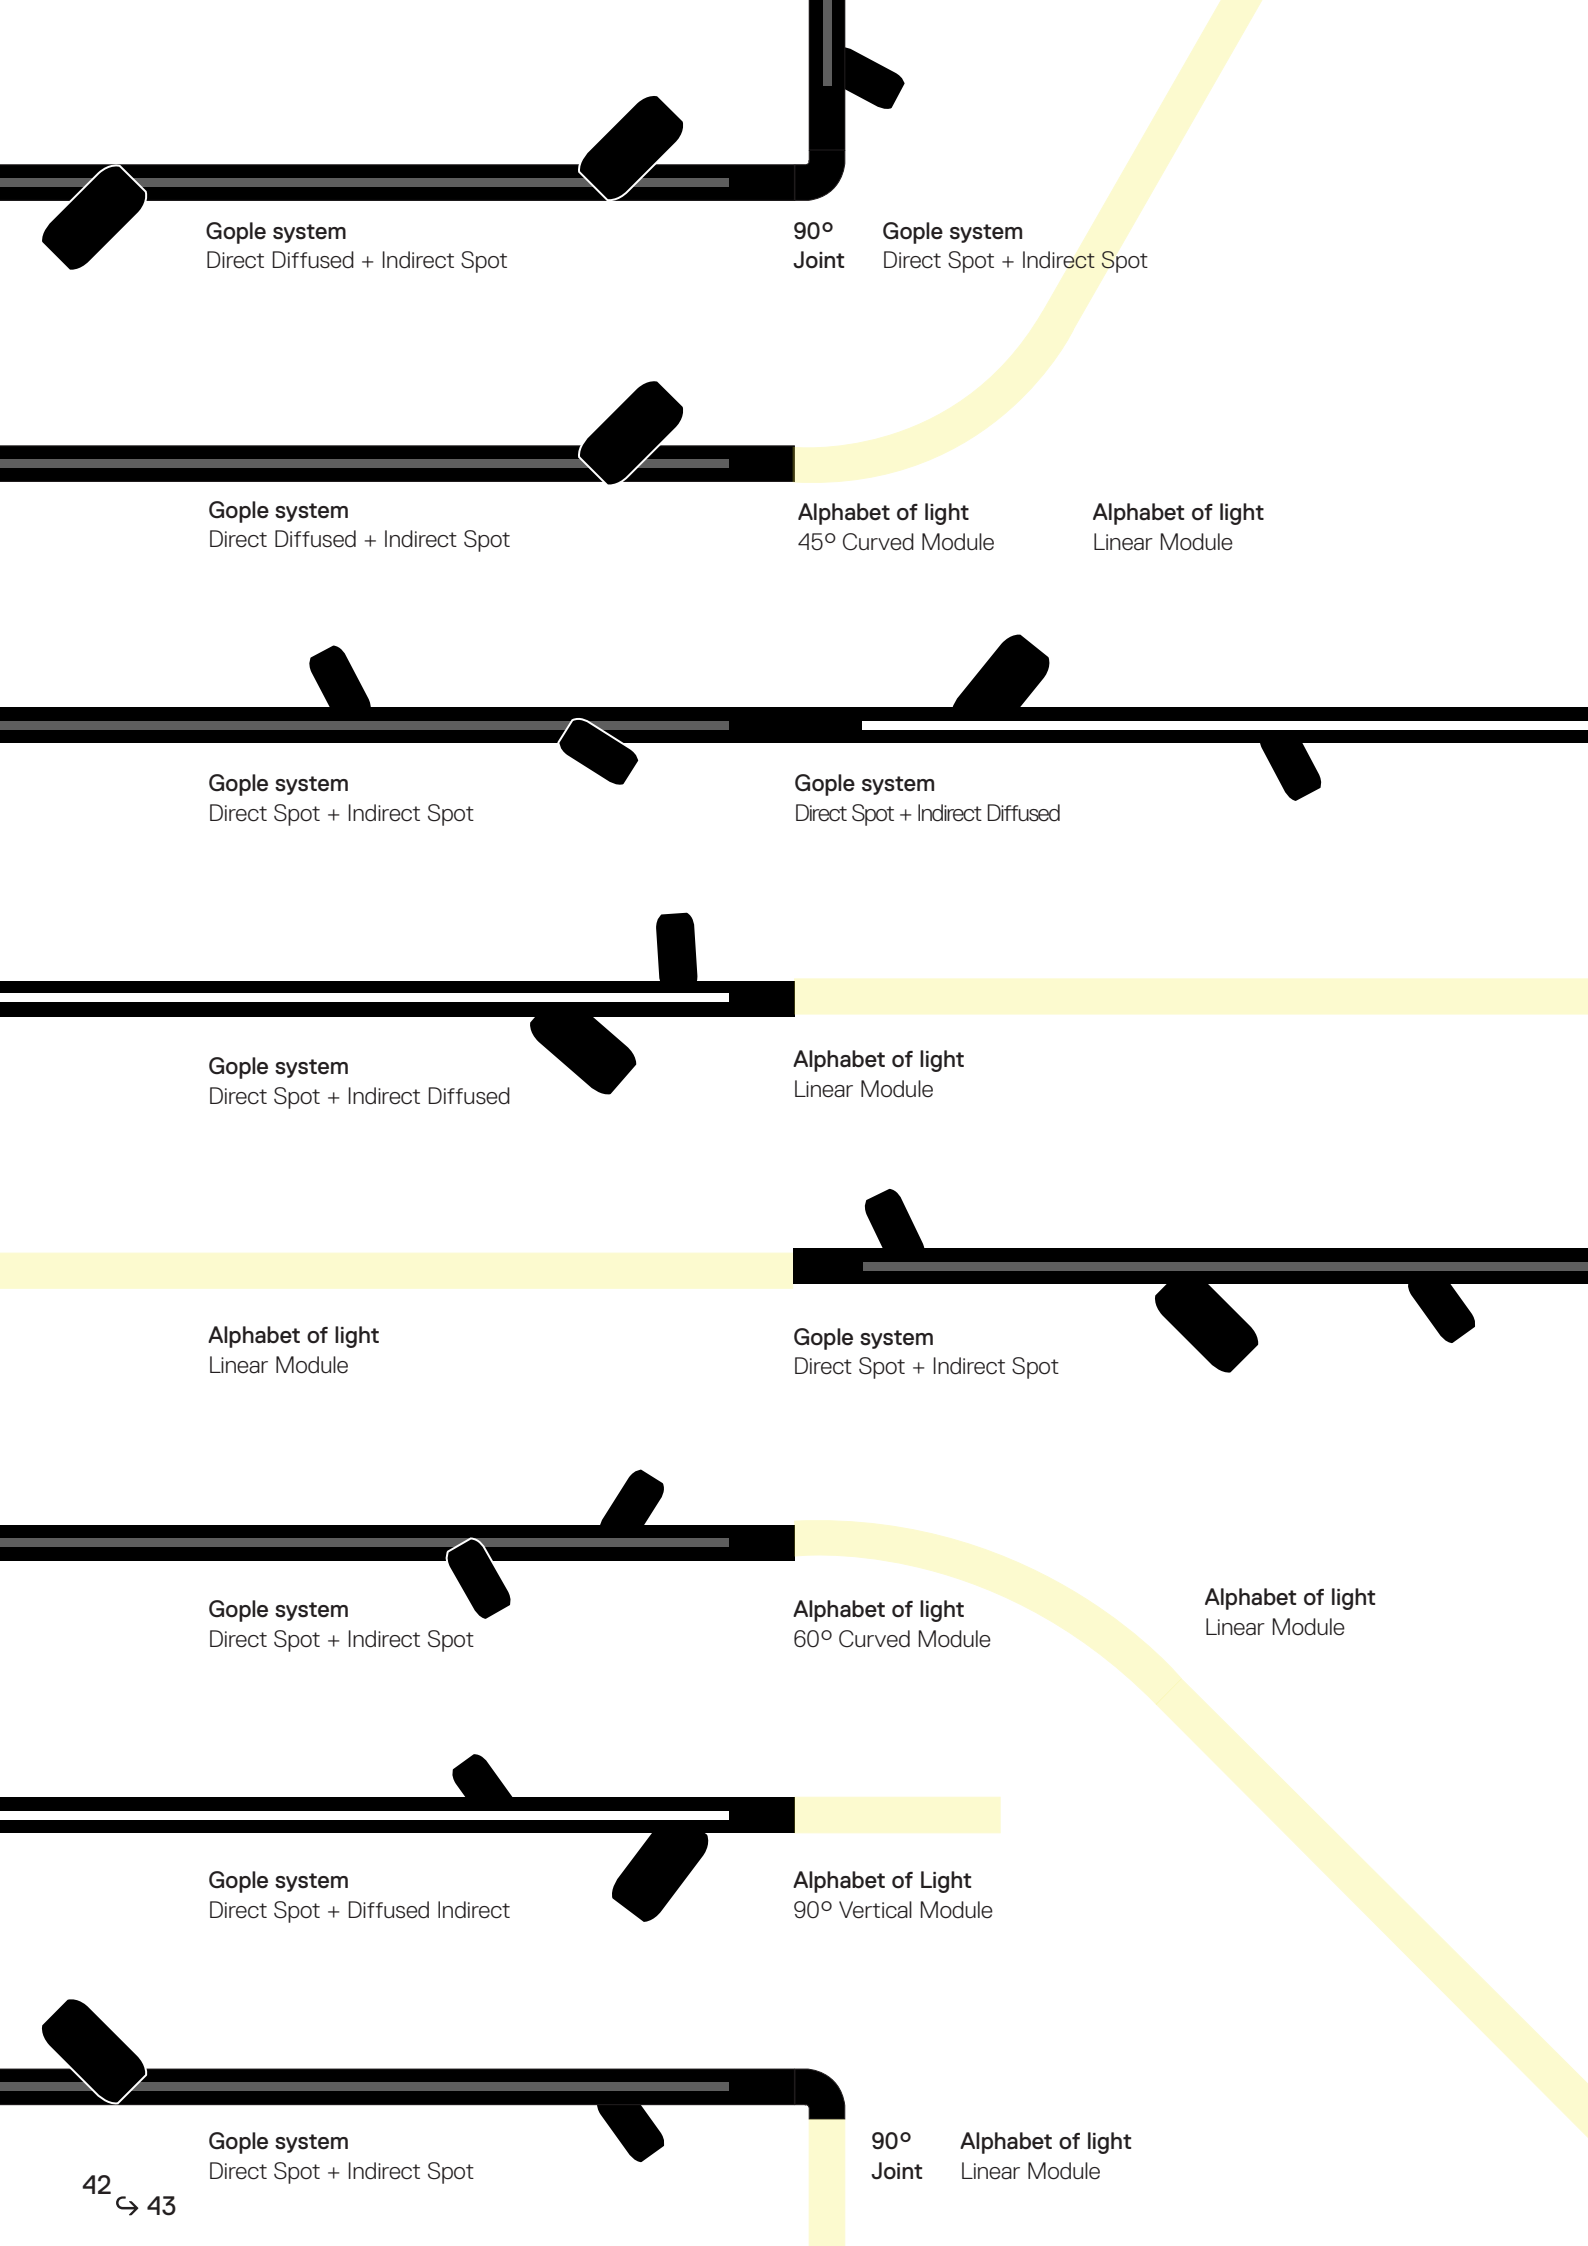

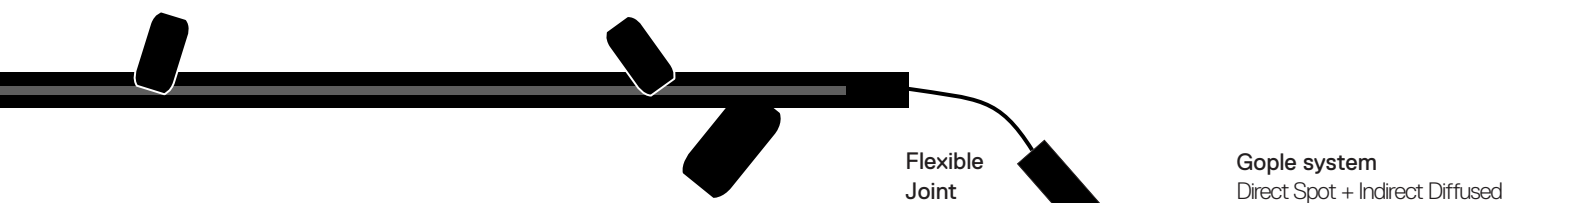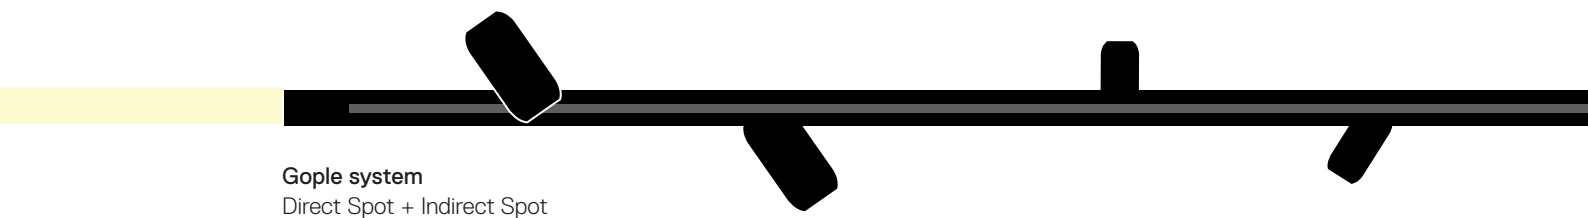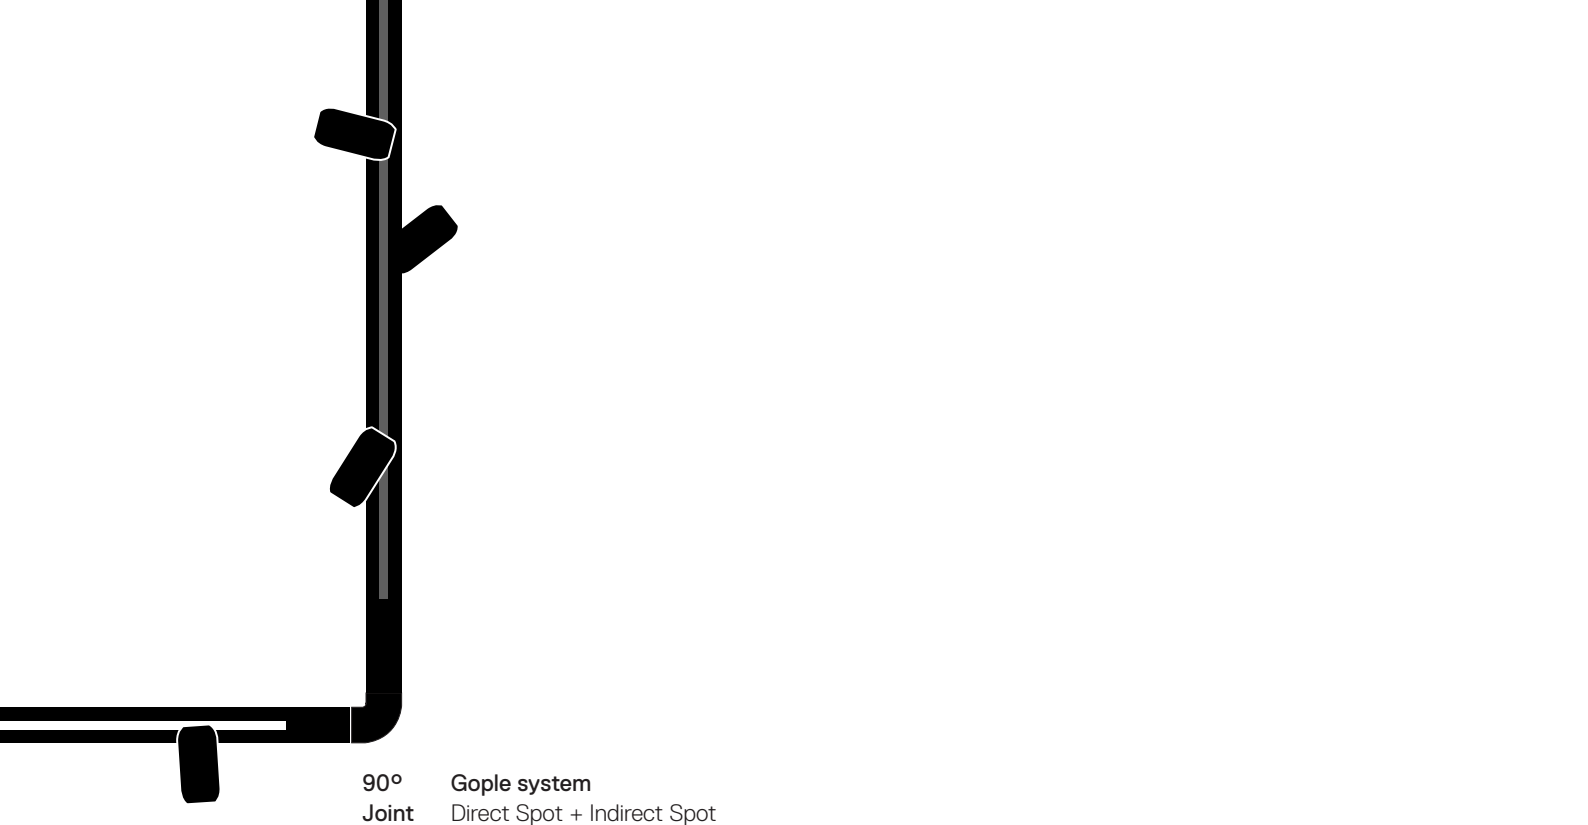

Endless Possibilities

Gople system modules can be combined in line or allow the freedom to define any corner in the space with an electrical connection unconstrained by any mechanical joint.

Thanks to Artemide's experience in developing systems that are increasingly unhindered by the limitations of electrical connections, Gople track can extend for long sections with just a single point of electrical connection.

On Gople system each spot can be managed separately with Artemide App to define flexible and dynamic scenarios.

White

Black

XF

01

04

MacAdam 2SDCM


Life L80 (10K) 55000h

CRI =80


IP20

→ LINEAR ELEMENTS


Direct Track 1180 mm




Direct Track 1772 mm



Direct Track + Indirect Emission 1180 mm



Direct Track + Indirect Emission 1772 mm




LINEAR DIRECT TRACK ELEMENTS

Suspension/Ceiling			
Length	V	Code	
1180 mm	48V	CB003. 01/04	
1772 mm	48V	CB004. 01/04	



LINEAR DIRECT TRACK + INDIRECT LIGHT ELEMENTS

Suspension						
Length	W	V	Flux	CCT	Code	
1180 mm	16W indirect	48V	1524 lm indirect	3000 K	CB006. 01/04	
1772 mm	32W indirect	48V	3049 lm indirect	3000 K	CB007. 01/04	



LINEAR DIRECT TRACK + INDIRECT TRACK ELEMENTS

Suspension			
Length	V	Code	
1180 mm	48V	On demand	
1772 mm	48V	On demand	



↪ GOPLE SYSTEM - ACCESSORIES

White Black



01




04


Suspension / Ceiling accessories

	Code
	End cap CB300. 01/04
	Flexible joint CB207. 01/04
	Rigid suspension/ceiling joint with electrical connection CB208. 01/04

Suspension accessories

	Code
	Powered suspension tige for ceiling rose (L=470mm) CB100. 01/04
	Powered suspension tige / ceiling mounted for recessed and remote rose (L=500mm) CB102. 01/04
	Suspension tige CB103. 01/04
	Powered suspension rigid joint for ceiling rose CB209. 01/04
	Powered suspension rigid joint for recessed and remote rose CB212. 01/04




Ceiling accessories

	Code
	Ceiling tige with powered head CB101. 01/04
	Powered ceiling tige / ceiling mounted for recessed and remote rose CB112. 01/04
	Ceiling tige CB103. 01/04
	Ceiling rigid joint with powered head CB211. 01/04
	Powered ceiling rigid joint for recessed and remote rose CB213. 01/04

↪ GOPLE SYSTEM - 90° ANGLE


White	Black	MacAdam 2SDCM	IP20
		Life L80 (10K) 55000h	
01	04	CRI =80	

SUSPENSION / CEILING JOINT

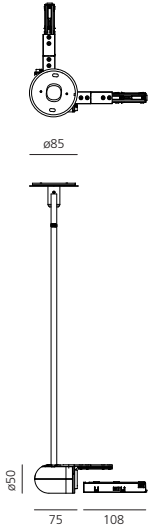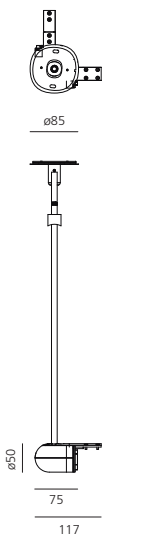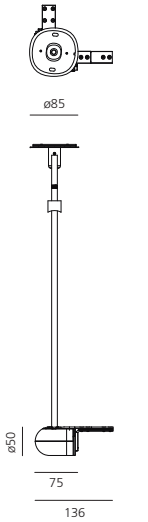90° Angle with electrical connection	Code CB400. 01/04		
90° Left Angle	Code CB401. 01/04		
90° Right Angle	Code CB402. 01/04		



Gople system configuration

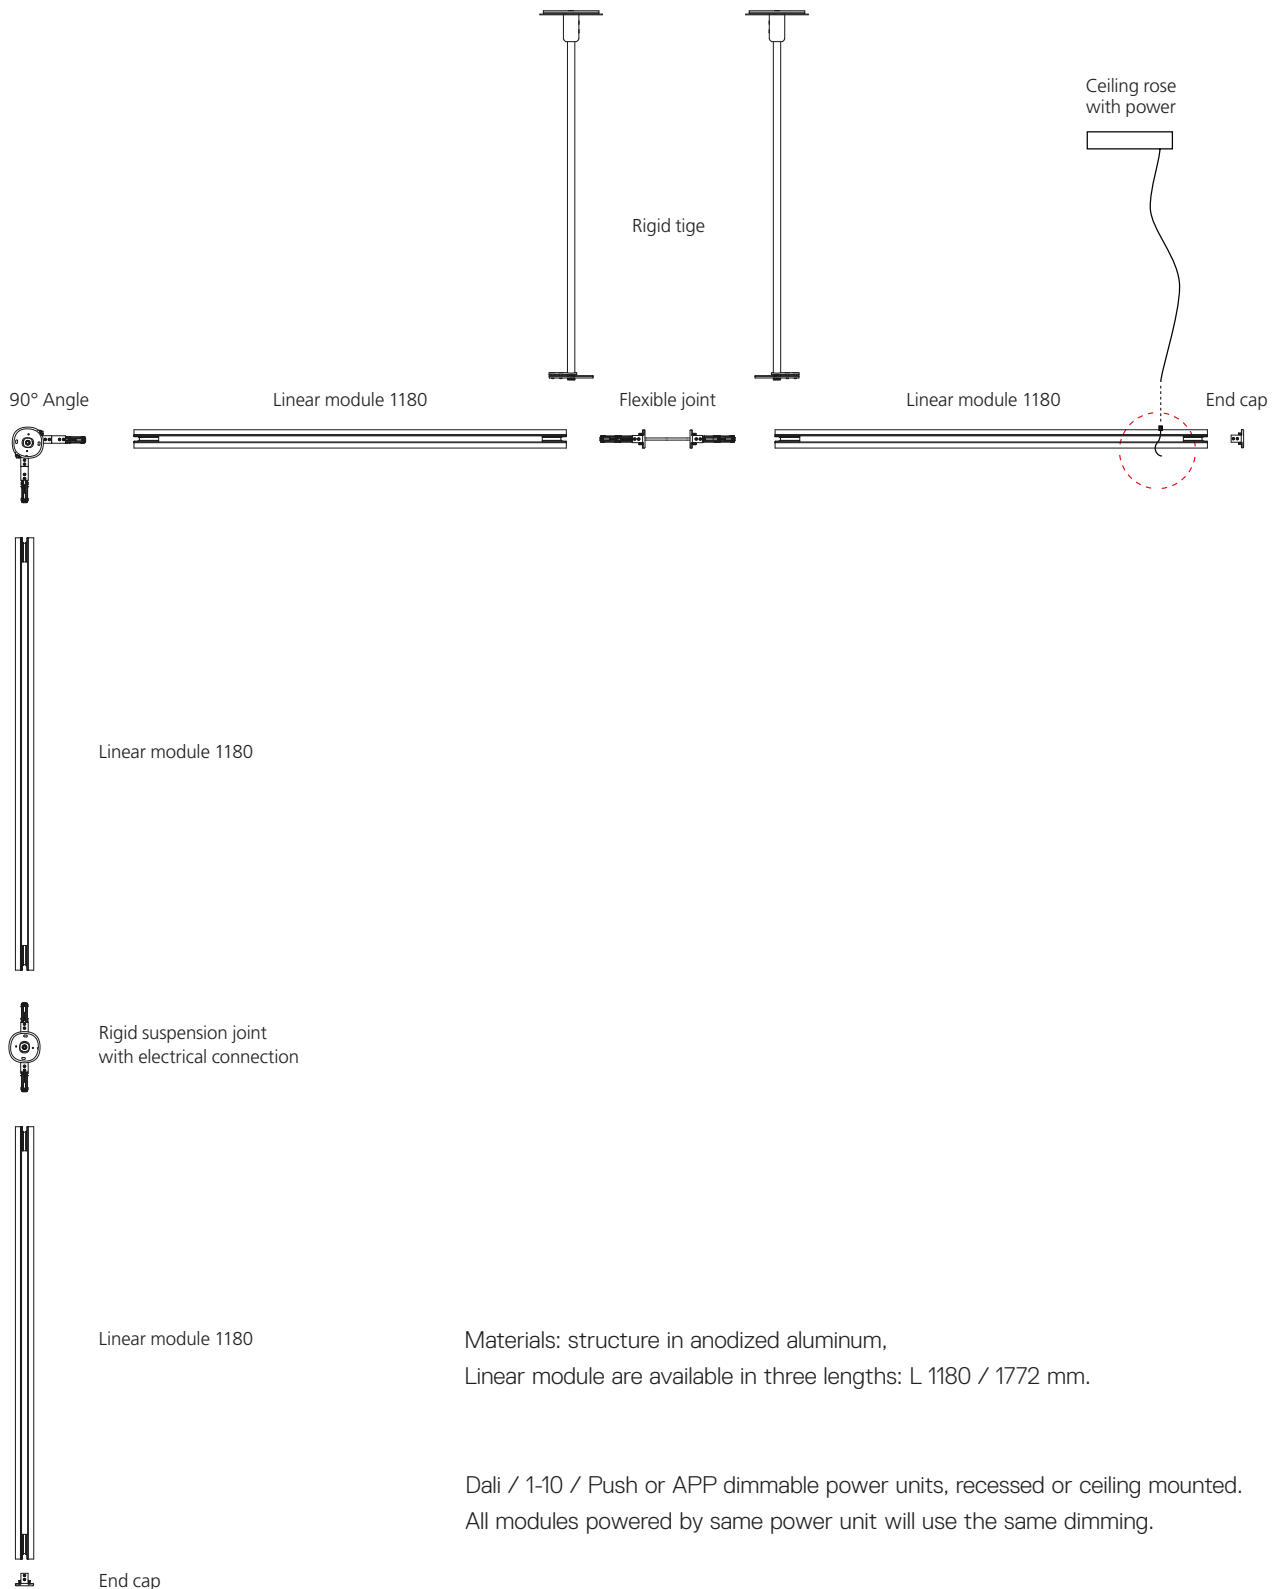

GOPLE SYSTEM - POWER SUPPLY KIT

White Black



01



04

The APP driver can not be controlled by DALI dimming system and viceversa.

IP20



CEILING

Power supply kit	ND	DALI	Artemide App
	Code	Code	Code
 Ceiling Power supply kit (ND / DALI / PUSH / 0-10/ APP) 150W 400x110x49H	CB500. 01/04	CB501. 01/04	CB502. 01/04
 Ceiling Power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 400x110x49H	CB503. 01/04	CB504. 01/04	CB505. 01/04

RECESSED

Power supply kit	ND	DALI	Artemide App
	Code	Code	Code
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 150W 396x178x108H	CB60001	CB60101	CB60201
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 396x178x108H	CB60301	CB60401	CB60501
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 320W 396x178x108H	CB60601	CB60701	CB60801

REMOTE

Power supply kit	DALI	Artemide App
	Code	Code
 Remote power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 313x243x57,5H	CB70001	CB70101
 Remote power supply kit (ND / DALI / PUSH / 0-10/ APP) 320W 313x243x57,5H	CB70201	CB70301

Gople spots



↪ GOPLE SYSTEM - SPOT TRACK


White	Black	S	F	WF	Delivery time on demand 2700K / 4000K	MacAdam 3SDCM *MacAdam 2SDCM CRI = 90	IP20 
							
01	04						

GOPLE 60 SPOT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
9 W	48V	S 13°	505 lm	2700K	CA000. 01/04
			540 lm	3000K	CA010. 01/04
			540 lm	4000K	CA020. 01/04
		*F 20°	542 lm	2700K	CA001. 01/04
			584 lm	3000K	CA011. 01/04
			625 lm	4000K	CA021. 01/04
		*WF 28°	490 lm	2700K	CA002. 01/04
			528 lm	3000K	CA012. 01/04
			566 lm	4000K	CA022. 01/04



Life L90 (10K) 60500h




GOPLE 80 SPOT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
23 W	48V	S 16°	1433 lm	2700K	CA100. 01/04
			1492 lm	3000K	CA110. 01/04
			1515 lm	4000K	CA120. 01/04
		F 22°	1408 lm	2700K	CA101. 01/04
			1465 lm	3000K	CA111. 01/04
			1488 lm	4000K	CA121. 01/04
		WF 32°	1534 lm	2700K	CA102. 01/04
			1596 lm	3000K	CA112. 01/04
			1621 lm	4000K	CA122. 01/04



Life L80 (9K)>50000h




GOPLE 60 SPOT PENDANT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
9 W	48V	S 13°	505 lm	2700K	CA200. 01/04
			540 lm	3000K	CA210. 01/04
			540 lm	4000K	CA220. 01/04
		*F 20°	542 lm	2700K	CA201. 01/04
			584 lm	3000K	CA211. 01/04
			625 lm	4000K	CA221. 01/04
		*WF 28°	490 lm	2700K	CA202. 01/04
			528 lm	3000K	CA212. 01/04
			566 lm	4000K	CA222. 01/04



Life L90 (10K) 60500h




GOPLE 80 SPOT PENDANT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
23 W	48V	S 16°	1433 lm	2700K	CA300. 01/04
			1492 lm	3000K	CA310. 01/04
			1515 lm	4000K	CA320. 01/04
		F 22°	1408 lm	2700K	CA301. 01/04
			1465 lm	3000K	CA311. 01/04
			1488 lm	4000K	CA321. 01/04
		WF 32°	1534 lm	2700K	CA302. 01/04
			1596 lm	3000K	CA312. 01/04
			1621 lm	4000K	CA322. 01/04



Life L80 (9K)>50000h



Alphabet of light & Gople system Joints



↪ ALPHABET OF LIGHT AND GOPLE SYSTEM - JOINTS

White Black



01



04

IP20




JOINTS

Joint		Code
01	→ Linear - linear joint	CB200. 01/04
02	→ Linear - curve 45° right joint	CB201. 01/04
03	→ Linear - curve 45° left joint	CB202. 01/04
04	→ Linear - curve 60° right joint	CB203. 01/04
05	→ Linear - curve 60° left joint	CB204. 01/04
06	→ Linear - curve up joint	CB205. 01/04
07	→ Linear - curve down joint	CB206. 01/04
08	→ Linear - curve 90° right joint	CB306. 01/04
09	→ Linear - curve 90° left joint	CB307. 01/04



Code CB200.01/04_ **JOINT 1**
→ LINEAR - LINEAR JOINT



Code CB201.01/04_ **JOINT 2**
→ LINEAR - CURVE 45° RIGHT JOINT



Code CB202.01/04_ **JOINT 3**
→ LINEAR - CURVE 45° LEFT JOINT



Code CB203.01/04_ **JOINT 4**
→ LINEAR - CURVE 60° RIGHT JOINT



Code CB204.01/04_ **JOINT 5**
→ LINEAR - CURVE 60° LEFT JOINT



Code CB205.01/04_ **JOINT 6**
→ LINEAR - CURVE UP JOINT



Code CB206.01/04_ **JOINT 7**
→ LINEAR - CURVE DOWN JOINT




Code CB306.01/04_ **JOINT 8**
→ LINEAR - CURVE 90° RIGHT JOINT



Code CB307.01/04_ **JOINT 9**
→ LINEAR - CURVE 90° LEFT JOINT

Alphabet of light & Gople system Configuration

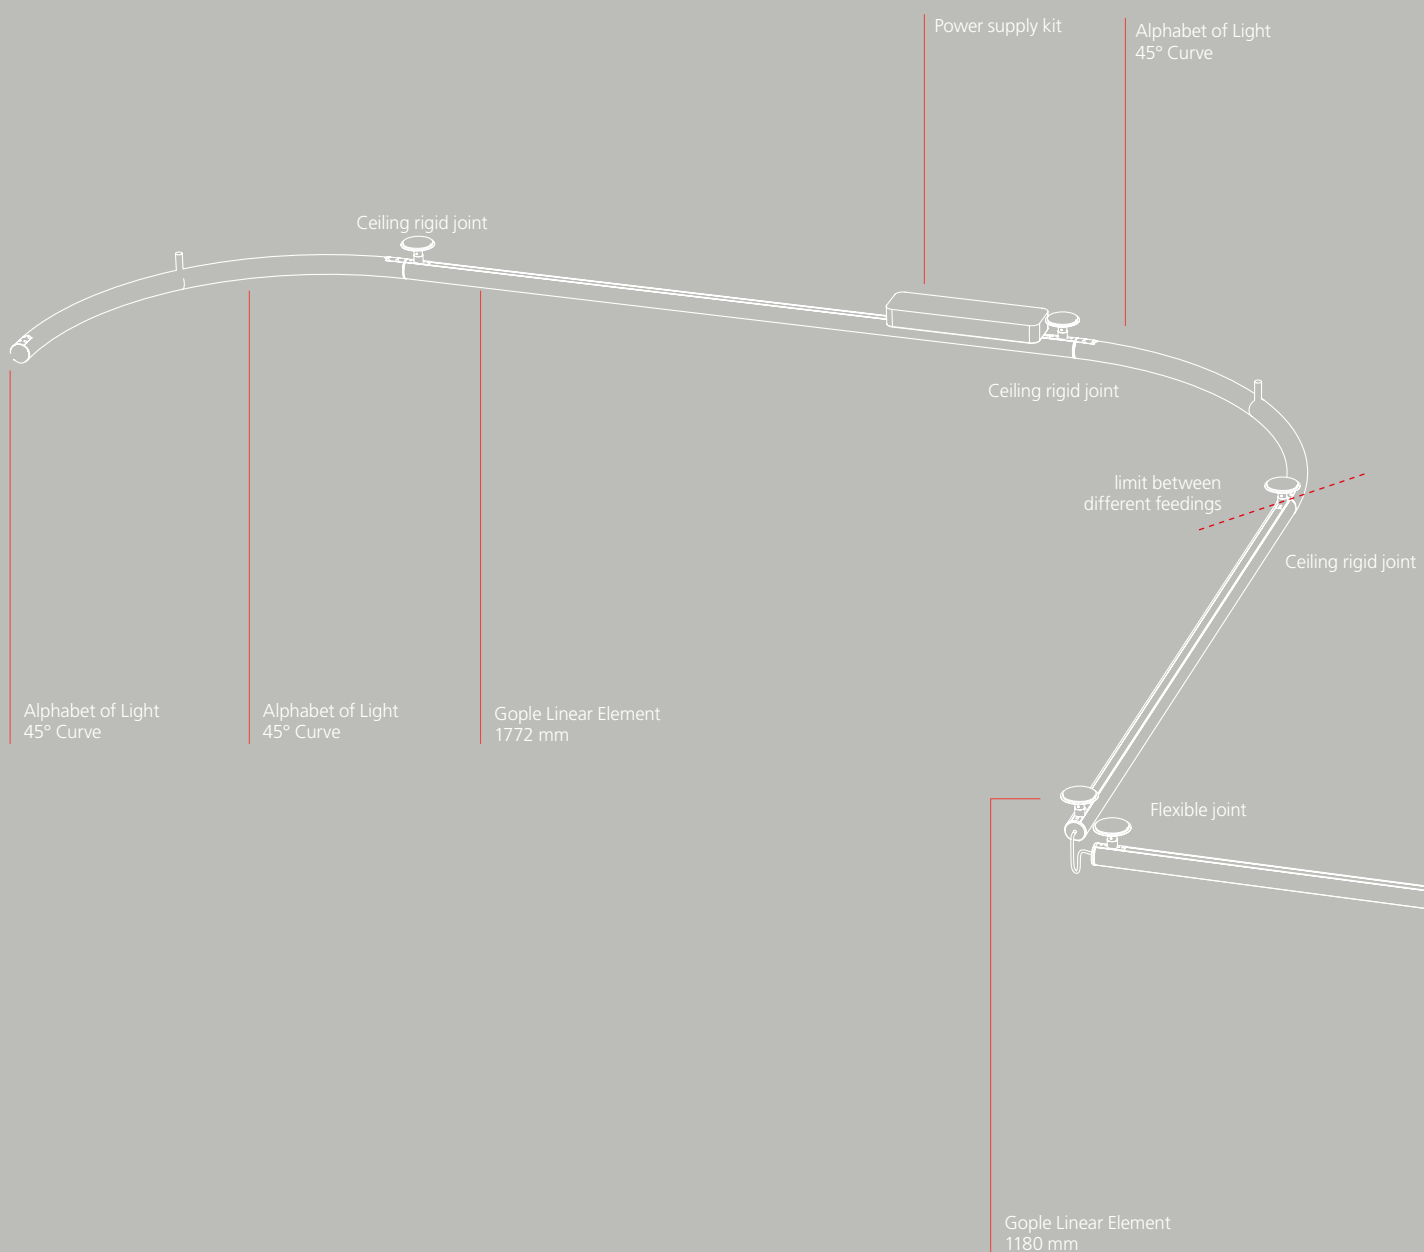







Alphabet of light Square-Rectangular

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA.

Square modules are available in two dimensions: 1200 x 12000/ 1800 x 1800 mm

Rectangular Module: 1200 x 1800 mm



- Patent pending for optics
- Patent pending for the mechanical and electrical connection

↪ ALPHABET OF LIGHT - WALL/CEILING SEMI-RECESSED

Opal White



XF



MacAdam 2SDCM
Life L80 (10K) 55000h
CRI =80

IP20



SQUARE

	W	Flux	CCT
Square 120	90 W	7736 lm	3000K
Square 180	138W	11724 lm	3000K

DALI / PUSH

Code

1430110A




1430120A

APP & PUSH

Code

1430110APP

1430120APP

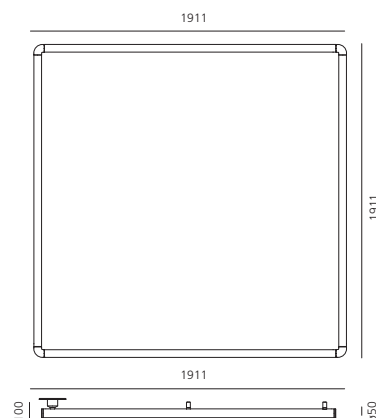

RECTANGULAR

	W	Flux	CCT
Rectangular	114 W	9730 lm	3000K

DALI / PUSH



Code

1430130A

APP & PUSH

Code

1430130APP

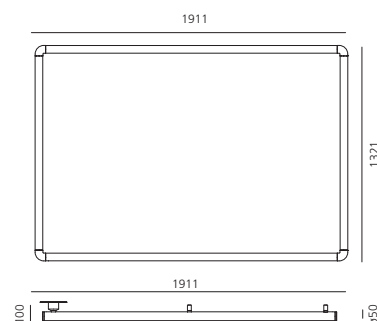

Wall/Ceiling Power Units

Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

Code

2268010A

2268010APP

2271010A

2271010APP



Ø 160



↪ ALPHABET OF LIGHT - WALL CEILING

Opal White



XF



MacAdam 2SDCM
Life L80 (10K) 55000h
CRI =80

IP20



SQUARE

	W	Flux	CCT
Square 120	90 W	7736 lm	3000K
Square 180	138W	11724 lm	3000K

DALI / PUSH

Code

1430210A




1430220A

APP & PUSH

Code

1430210APP

1430220APP

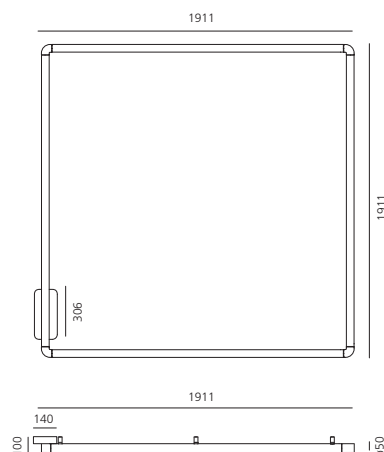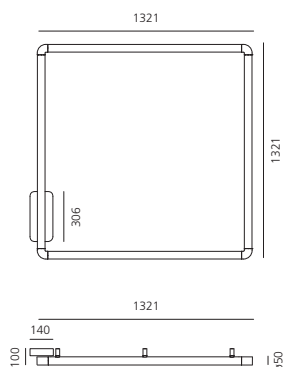

RECTANGULAR

	W	Flux	CCT
Rectangular	114 W	9730 lm	3000K

DALI / PUSH



Code

1430230A

APP & PUSH

Code

1430230APP

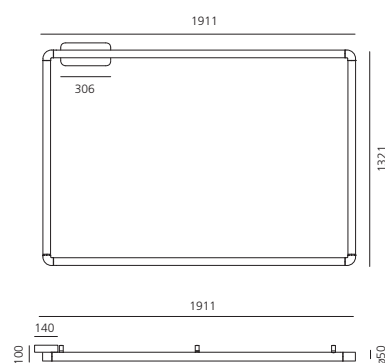

Wall/Ceiling Power Units

Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

Code

2268010A

2268010APP

2271010A

2271010APP



Ø 160

↪ ALPHABET OF LIGHT - SUSPENSION

Opal White

XF



MacAdam 2SDCM
Life L80 (10K) 55000h
CRI =80

IP20



SQUARE

	W	Flux	CCT
Square 120	90 W	7736 lm	3000K
Square 180	138W	11724 lm	3000K

DALI / PUSH

Code

1430010A






1430020A

APP & PUSH

Code

1430010APP

1430020APP

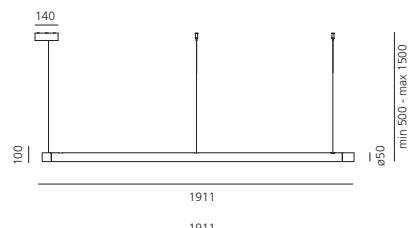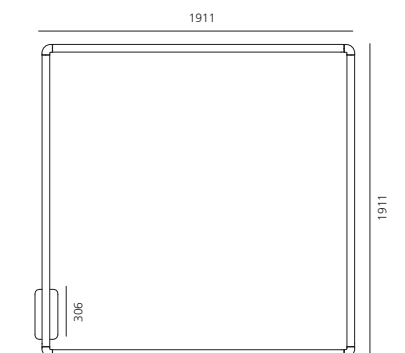

RECTANGULAR

	W	Flux	CCT
Rectangular	114 W	9730 lm	3000K

DALI / PUSH




Code

1430030A

APP & PUSH

Code

1430030APP

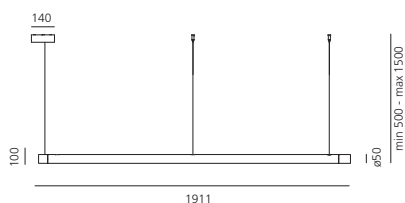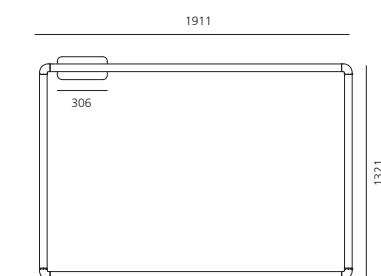

Suspension Power Units

Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

Code

2267010A

2267010APP

2272010A

2272010APP



Ø 160

Alphabet of light

Linear-Circular

- Patent pending for optics
- Patent pending for the mechanical and electrical connection



La Biennale di Venezia, "Robin Hood Gardens: A Ruin in Reverse" Exhibition, | 2018

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA.

Linear modules are available in three lengths: L 1200 / 1800 / 2400 mm.

Circular modules are available in two diameters: $\varnothing$ tot 900 / 1550 mm.



Artemide
App







↪ ALPHABET OF LIGHT - WALL/CEILING

Opal White



XF



MacAdam 2SDCM
Life L80 (10K) 55000h
CRI =80

IP20



LINEAR

	W	Flux	CCT
Linear 120	35 W	3480 lm	3000K
Linear 180	50 W	5226 lm	3000K
Linear 240	63 W	6968 lm	3000K

DALI / PUSH

Code

1304000A

1305000A

1308000A




APP & PUSH

Code

1304000APP

1305000APP

1308000APP

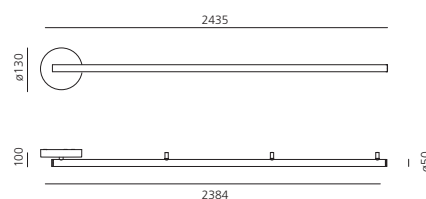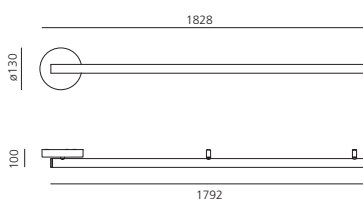

CIRCULAR

	W	Flux	CCT
Circular ø 90	55 W	6040 lm	3000K
Circular ø155	91W	10740 lm	3000K

DALI / PUSH

Code

1306000A



1307000A

APP & PUSH

Code

1306000APP

1307000APP

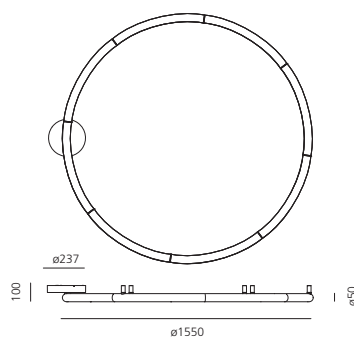

↪ ALPHABET OF LIGHT - WALL/CEILING SEMI-RECESSED

Opal White



XF



Constant current SELV
driver supplied separately



MacAdam 2SDCM
Life L80 (10K) 55000h
CRI =80

IP20




LINEAR SEMI-RECESSED

	I	W	Flux	CCT	Code
Linear 120	800mA	29 W	3480 lm	3000K	1425000A
Linear 180	1200mA	44 W	5226 lm	3000K	1426000A
Linear 240	1600mA	58 W	6968 lm	3000K	1427000A

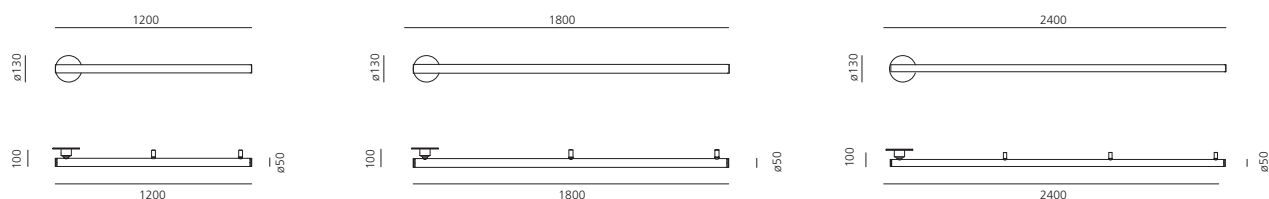

CIRCULAR SEMI-RECESSED

	I	W	Flux	CCT	Code
Circular ø 90	1400mA	50 W	6040 lm	3000K	1428000A
Circular ø155	1200mA	86 W	10740 lm	3000K	1429000A
	+1200mA				

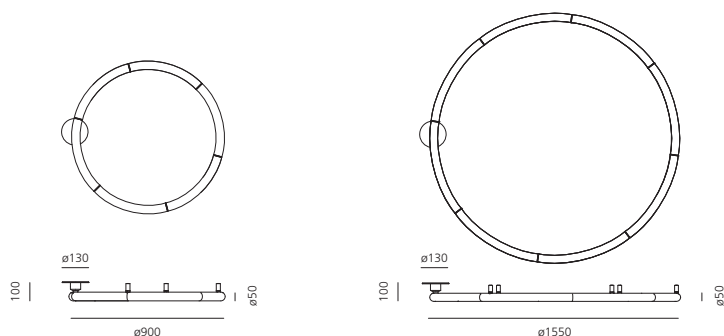

Model	Driver	Vac	Pw	L _{mm}	W _{mm}	H _{mm}		Code
Linear 120	CC 800mA	220-240	35	124	80	22	DALI / 1-10 / PUSH	DV1035
Linear 120	CC 800mA	220-240	35	124	80	22	APP / PUSH	DV1035APP
Linear 180	CC 1200mA	220-240	50	124	80	22	DALI / 1-10 / PUSH	DV1035
Linear 180	CC 1200mA	220-240	50	124	80	22	APP / PUSH	DV1035APP
Linear 240	CC 1600mA	220-240	63	130	76	30	DALI / 1-10 / PUSH	DV1034
Linear 240	CC 1600mA	220-240	63	130	76	30	APP / PUSH	DV1034APP
Circular Ø90	CC 1400mA	220-240	55	130	76	30	DALI / 1-10 / PUSH	DV1034
Circular Ø90	CC 1400mA	220-240	55	130	76	30	APP / PUSH	DV1034APP
Circular Ø155	CC 1200+1200mA	220-240	91	350	80	23	DALI / 1-10 / PUSH	DV1036
Circular Ø155	CC 1200+1200mA	220-240	91	350	80	23	APP / PUSH	DV1036APP





↪ ALPHABET OF LIGHT - SUSPENSION

Opal White



XF



MacAdam 2SDCM
Life L80 (10K) 55000h
CRI =80

IP20



LINEAR




	W	Flux	CCT
Linear 120	35 W	3484 lm	3000K
Linear 180	50 W	5226 lm	3000K
Linear 240	63 W	6968 lm	3000K

DALI / PUSH

Code
1204000A
1205000A
1208000A

APP / PUSH

Code
1204000APP
1205000APP
1208000APP

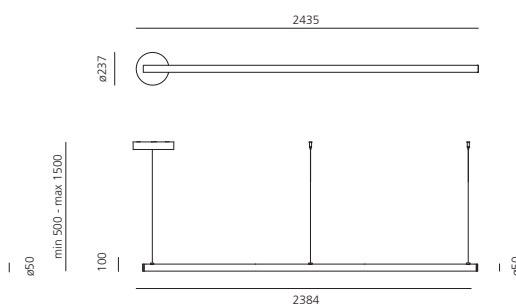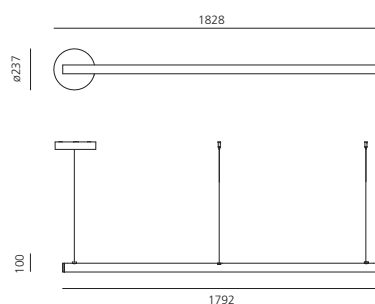

CIRCULAR



	W	Flux	CCT
Circular ø 90	55 W	6040 lm	3000K
Circular ø 155	91W	10740 lm	3000K

DALI / PUSH

Code
1206000A
1207000A

APP / PUSH

Code
1206000APP
1207000APP

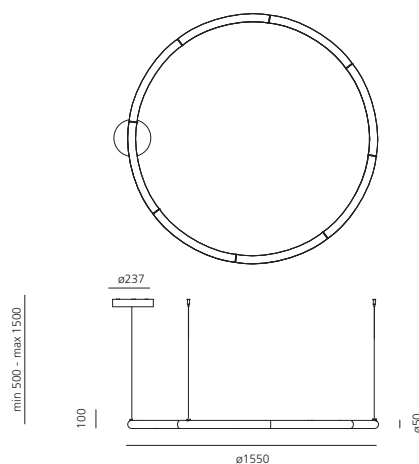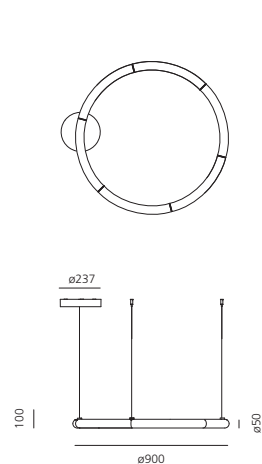

Suspension accessories

4.5 m extension feeding cable + 4 suspension wires L=6m for AoL circular Ø155
4.5 m extension feeding cable + 3 suspension wires L=6m for AoL linear 120/180/240 and AoL circular Ø90

Code

1209100A
1209000A











TEATRO ARENA







Alphabet of light Letters









os over the lazy dog





Alphabet of light Letters installation

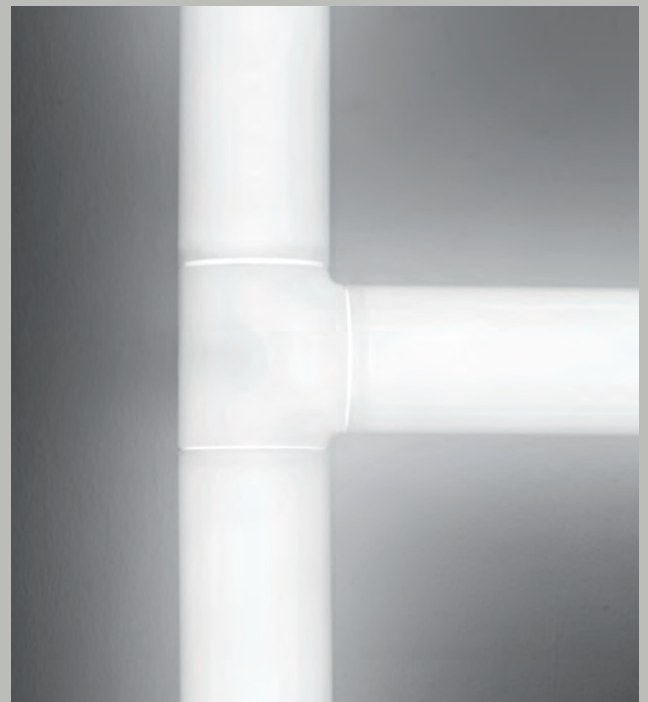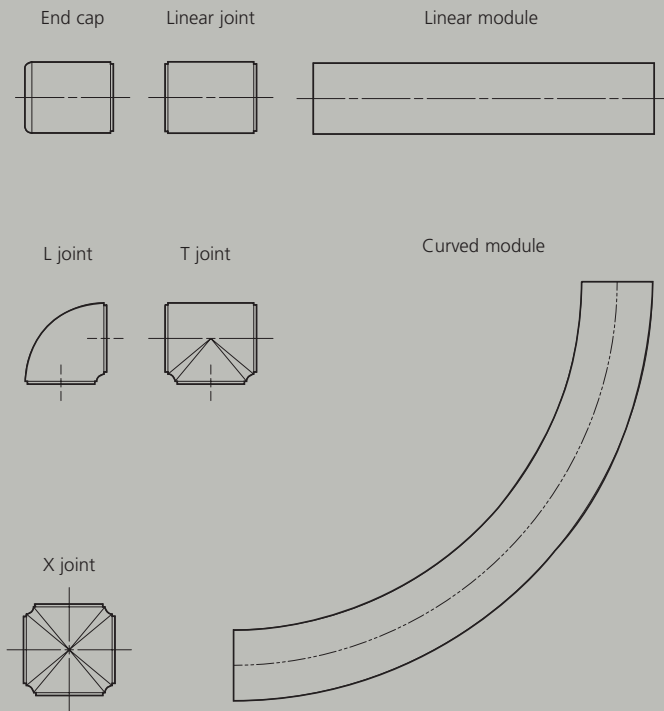


Modules

An entire alphabet composed by 7 elements:
5 joints + 2 constructive modules
with electro mechanical connections

→ MDF SUPPORT INSTALLATION

The letters are provided mounted on MDF panels to allow installation on any kind of wall. Installation requires creating a counter-frame to accommodate the drivers, supplied separately, and the power cables.


A configuration software is available to calculate the necessary usable surface, as well as to identify the codes required to implement the desired project.

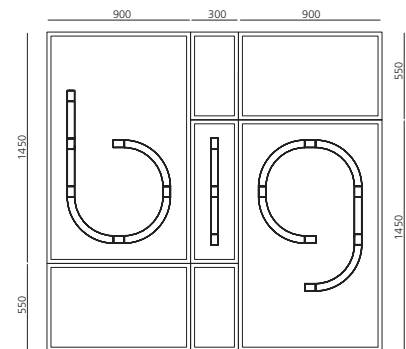

1. Create the supporting frame and provide for power connections for the individual letters.



2. Connect panel b to power source.

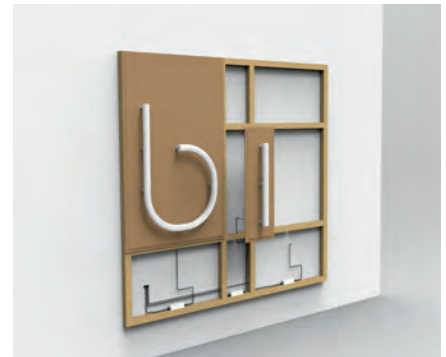

3. Fix panel b and connect panel i to power source.



4. Fix panel i and connect panel g to power source.



5. Fix panel g and close using the supplied panels.



6. Complete closing using the supplied panels.



7. Frame ready for finishing.




8. Apply the gauze and plaster flush with the gaps between panels.




9. Final painting.

→ CARDBOARD MOUNTING-SUPPORT INSTALLATION

The letters are provided with a packaging that ensures the right support during the installation process. This type of installation is suitable for existing drywalls that have accessible back space for the housing of drivers (code DV1009) supplied separately and cables (power supply 75 W max - 2 letters or more up to max 85% load).

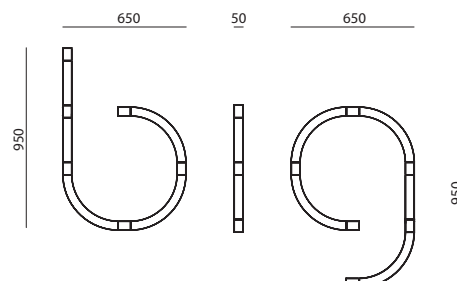


1. Drywall with accessible back space.

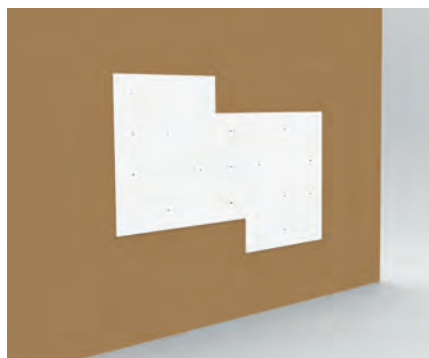

2. Use the provided template to drill the holes and paint the drywall.



3. Install wall pins, identify output points and prepare wiring connections.

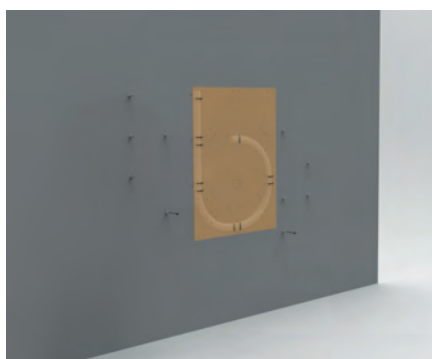

4. Connection of letter b to first wall output.



5. Attachment of letter b on wall pins.




6. Detail of the wall pins fixing.



7. Detail of the wall pins fixing.



8. Removal of the nylon wrapper.

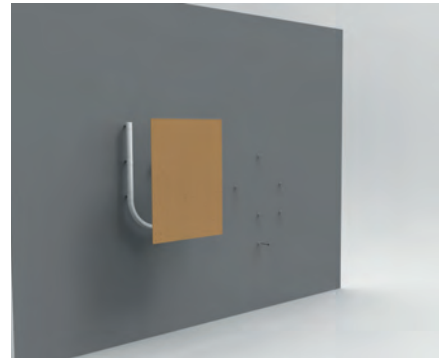

9. Removal of the cardboard support.



10. Connect letter I to first wall output.



11. Fix letter I on wall pins.



12. Removal of the nylon wrapper.



13. Attachment of letter Q to first wall output.



14. Removal of the nylon wrapper.



15. Finished.



↪ ALPHABET OF LIGHT - LETTERS

Opal White	XF	Driver supplied separately.	MacAdam 2SDCM Life L80 (10K) 55000h CRI =80	IP20
				

Uppercase				Size		Dimmable DALI	
Letter	W	Flux	H x L	Letters	+ Support		
A	30 W	2011 lm	950 x 650	1201A00A	1211A00A		
B	31 W	2156 lm	950 x 650	1201B00A	1211B00A		
C	20 W	1296 lm	950 x 650	1201C00A	1211C00A		
D	29 W	2011 lm	950 x 650	1201D00A	1211D00A		
E	26 W	1651 lm	950 x 650	1201E00A	1211E00A		
F	19 W	1221 lm	950 x 650	1201F00A	1211F00A		
G	21 W	1366 lm	950 x 650	1201G00A	1211G00A		
H	27 W	1721 lm	950 x 650	1201H00A	1211H00A		
I	11 W	646 lm	950 x 50	1201I00A	1211I00A		
J	21 W	1366 lm	950 x 650	1201J00A	1211J00A		
K	26 W	1651 lm	950 x 650	1201K00A	1211K00A		
L	17 W	1076 lm	950 x 650	1201L00A	1211L00A		
M	38 W	2512 lm	950 x 950	1201M00A	1211M00A		
N	25 W	1651 lm	950 x 650	1201N00A	1211N00A		
O	27 W	1871 lm	950 x 650	1201O00A	1211O00A		
P	27 W	1796 lm	950 x 650	1201P00A	1211P00A		
Q	31 W	2086 lm	950 x 650	1201Q00A	1211Q00A		
R	30 W	2011 lm	950 x 650	1201R00A	1211R00A		
S	23 W	1511 lm	950 x 650	1201S00A	1211S00A		
T	17 W	1076 lm	950 x 650	1201T00A	1211T00A		
U	24 W	1581 lm	950 x 650	1201U00A	1211U00A		
V	25 W	1651 lm	950 x 650	1201V00A	1211V00A		
W	38 W	2512 lm	950 x 950	1201W00A	1211W00A		
X	27 W	1721 lm	950 x 900	1201X00A	1211X00A		
Y	21 W	1366 lm	950 x 650	1201Y00A	1211Y00A		
Æ	42 W	2727 lm	950 x 950	1201AE00A	1211AE00A		
Ø	36 W	2517 lm	950 x 650	1201S00A	1211S00A		
À	35 W	2372 lm	950 x 650	1201E00A	1211E00A		
Ž	27 W	1796 lm	950 x 650	1201Z00A	1211Z00A		

Lowercase				Size		Dimmable DALI	
Letter	W	Flux	H x L	Letters	+ Support		
a	20 W	1296 lm	650 x 650	1202a00A	1212a00A		
b	23 W	1511 lm	950 x 650	1202b00A	1212b00A		
c	17 W	1081 lm	650 x 650	1202c00A	1212c00A		
d	23 W	1511 lm	950 x 650	1202d00A	1212d00A		
e	20 W	1296 lm	650 x 650	1202e00A	1212e00A		
f	16 W	1006 lm	950 x 350	1202f00A	1212f00A		
g	25 W	1656 lm	950 x 650	1202g00A	1212g00A		
h	23 W	1436 lm	950 x 650	1202h00A	1212h00A		
i	8 W	430 m	650 x 50	1202i00A	1212i00A		
j	13 W	791 m	950 x 350	1202j00A	1212j00A		
k	23 W	1436 lm	950 x 650	1202k00A	1212k00A		
l	11 W	646 lm	950 x 50	1202l00A	1212l00A		
m	29 W	1866 lm	650 x 950	1202m00A	1212m00A		
n	19 W	1221 lm	650 x 650	1202n00A	1212n00A		
o	21 W	1441 lm	650 x 650	1202o00A	1212o00A		
p	23 W	1511 lm	950 x 650	1202p00A	1212p00A		
q	23 W	1511 lm	950 x 650	1202q00A	1212q00A		
r	14 W	791 lm	650 x 350	1202r00A	1212r00A		
s	21 W	1366 lm	650 x 650	1202s00A	1212s00A		
t	17 W	1006 lm	950 x 350	1202t00A	1212t00A		
u	19 W	1221 lm	650 x 650	1202u00A	1212u00A		
v	18 W	1151 lm	650 x 650	1202v00A	1212v00A		
w	24 W	1581 lm	650 x 950	1202w00A	1212w00A		
x	15 W	861 lm	650 x 650	1202x00A	1212x00A		
y	25 W	1581 lm	950 x 650	1202y00A	1212y00A		
œ	32 W	2016 lm	650 x 950	1202ae00A	1212ae00A		
ø	27 W	1871 lm	650 x 650	1202S00A	1212S00A		
ā	25 W	1656 lm	650 x 650	1202E00A	1212E00A		
z	24 W	1581 lm	650 x 650	1202z00A	1212z00A		

Driver									
Driver	Vac	Lmm	Wmm	Hmm	IP	N° device	Code		
75 W	220-240	180	52	30	20	1min-2max	Undimmable	DV1009	





Alphabet of light and Gople system are compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.





Download Artemide App
and find more information on
[artemide.com](https://www.artemide.com)

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Communication and Marketing Department

Via Canova, 34
20145 Milan (MI), Italy
Tel. +39 02.349611
marketing@artemide.com
artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.



ISO 9001:2015



ISO 14001:2015



ISO 45001:2018

Artemide®