



NORLYS

Brightening your life with our passion for light

Inspired by the simplicity and timeless aesthetics of Scandinavian design, we draw from nature to craft lighting fixtures that exude elegance and sophistication. NORLYS products embody the core values of Scandinavian design, embracing minimalism, functionality and enduring beauty. With NORLYS, you can trust that our lighting solutions will effortlessly integrate into any space, elevating its ambiance and leaving a lasting impression.



30 + _____ years on the market

300 + _____ team members

24 _____ countries

5 mln _____ unit sold

We're focused on our core values

At NORLYS, our values are at the core of everything we do. They shape our culture, inspire our actions, and drive our passion for delivering the best lighting solutions. We believe that by upholding these values, we can make a positive impact on the world of lighting.



For people

We're field experts who enjoy sharing knowledge and cherish long lasting customer relationships.

Commitment to our Clients has been our path for years, and we tread it with confidence. We support with pre-sales advice and information, and we follow up after the purchase. They can count on our openness and professionalism. They can rely on us. We put the Clients at the center of everything we do. We strive to deeply understand their varied needs, to allay fears, and surpass expectations with a wide range of diverse and unique products and services tailored to individual needs.



Responsibility

We shape the world with gentle passion, showcasing its beauty in the finest light, because it deserves nothing less.

We can't operate any other way. We want to leave the world as we found it, with all its beauty and diversity. We responsibly use renewable resources, continuously improve energy-efficient production methods, and create top-quality luminaries with a minimal impact on the environment. Building a responsible and ethical company is a continuous, long-term effort on processes without compromises or half measures.



Passion for light

We focus on the future, emphasizing sustainability and our impact on future generations.

We strive to create extraordinary places, providing unique lighting experiences. By combining cutting-edge innovations, professionalism, enthusiasm, and the experience of our team, we obtain a powerful tool. A tool for extracting the best qualities and meanings from spaces. Our commitment to designing unique and practical lighting solutions enriches and invigorates space.



Over 30 years of experience

NORLYS is the embodiment of the Scandinavian spirit. It was born in the frosty North in Norway, reflecting its simplicity, resilience, and naturalness. NORLYS is the answer to the long polar nights, the harshness of nature, and the need for safety. That is why we have been lighting spaces for 30 years. It is our passion and mission.

Today our main production plant and stock facilities are established in Poland and Sweden. We have our own aluminium foundry, a press department for the production of steel luminaires, and a hot-dip galvanising department. Apart from that, we have a machining department which includes CNC machining, a powder-coating department, and assembly departments. Our pride is our own Testing Laboratory equipped with specialised equipment of the highest class for the testing of luminaires. This lab performs measurements according to the requirements specific to ENEC and in accordance with the ISO 17025 standard.

We are an international company. Our subsidiaries located in Norway, Sweden, France, Italy and Poland are accompanied by an extensive worldwide sales network of professional distributors. This year, we are proud to announce that we have achieved the EcoVadis Bronze certification, reaffirming our commitment to sustainable development and corporate social responsibility.



Brand new production hall (1998)



Swedish warehouse (2011)




Die casting and tool shop (2011)



New warehouse and assembly (2015)

How to read the catalogue?

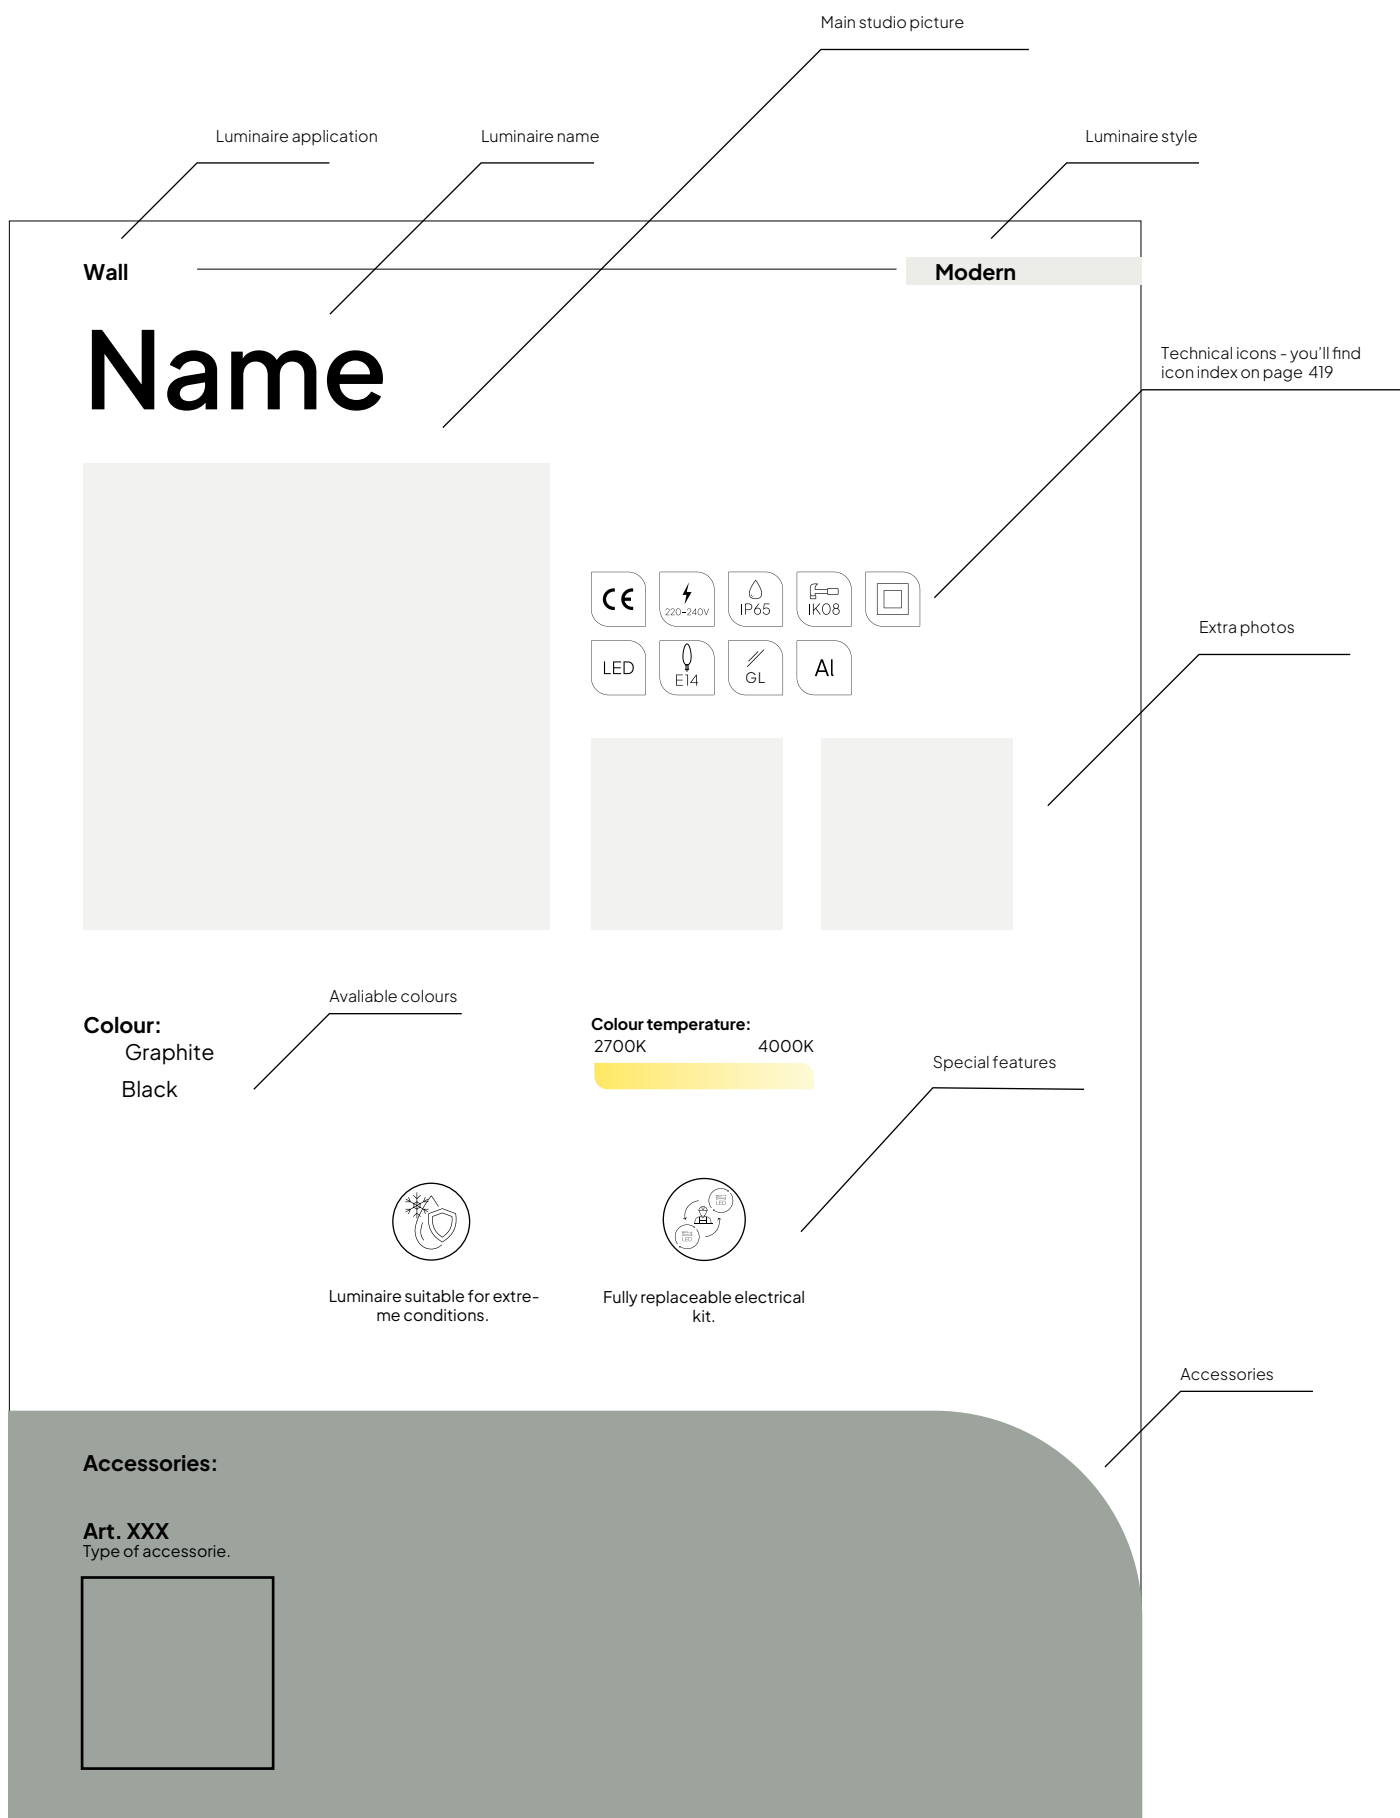

Families

A	p.43	Alta
	p.19	Arendal
	p.13	Arendal Mini
	p.295	Arvika
	p.23	Asker
B	p.299	Basel
	p.241	Bergen
	p.244	Berlin
	p.303	Bern
	p.307	Boden
	p.348	Bologna
	p.51	Borg
	p.59	Bornholm
	p.246	Bremen
C	p.335	Chelsea
	p.358	Como
E	p.73	Egersund
	p.63	Egersund Mini
	p.75	Egersund Park
F	p.365	Florence
G	p.81	Geneva
	p.373	Genoa
	p.375	Glasgow
	p.87	Glode
	p.85	Grimstad
H	p.99	Halden
	p.89	Halmstad
	p.109	Hammerfest
	p.101	Hellvik
	p.107	Hitra
K	p.311	Karlstad
	p.113	Kisa
	p.119	Koster
L	p.262	Larvik
	p.395	Latina
	p.129	Lillehammer
	p.133	Lillesand
	p.249	Lofoten
	p.377	London
	p.316	Lund
	p.137	Lysfjord
M	p.321	Mandal
	p.415	Milano
	p.397	Modena
	p.142	Molde
	p.147	Mora
	p.149	Moss
N	p.169	Namsos
	p.165	Narvik

	p.181	Nice
	p.163	Nidaros
	p.159	Nordland
O	p.183	Oppland
P	p.264	Oslo
	p.325	Paris
	p.417	Poles
R	p.189	Rena
	p.411	Rimini
	p.197	Rondane
S	p.205	Sande
	p.199	Sandvik
	p.330	Ski
	p.202	Skara
	p.207	Sol
	p.211	Stavanger
	p.272	Stockholm
T	p.227	Torp
V	p.229	Trysil
	p.333	Vansbro
	p.219	Vasa
	p.409	Venice
	p.225	Varberg
	p.221	Visby
	p.215	Voss

Modern
Classic
Industrial
Loft

Wall

Arendal



Asker



Asker Big



Basel



Bergen



Berlin




Bern



Boden



Bologna



Bologna



Borholm



Bremen



Chelsea



Chelsea



Chelsea



Chelsea Big



Como



Florence



Geneva



Genoa



Genoa Mini



Glasgow



Halden



Hitra



Karlstad



Koster



Larvik



Latina



Lillehammer



Lofoten



Lofoten



London



London



London Big



Lund



Lysfjord



Mandal



Mandal



Modena



Modena Big



Modena Big



Molde



Namsos



Nordland



Oslo




Paris



Paris Big



Rimini



Rondane



Sandvik



Sandvik



Ski



Stockholm



Stockholm



Stockholm Big



Torp



Vansbro



Vasa



Venice



Voss




Bollard

Alta



Alta



Alta



Alta



Arendal



Arendal



Arendal



Arendal Mini



Arendal Mini



Arvika



Arvika



Asker




Asker



Bologna



Bologna




Borg



Borg



Borg




Borg



Chelsea




Chelsea



Chelsea Big



Chelsea Big



Como



Egersund




Egersund



Egersund Mini



Egersund Mini



Egersund Mini



Egersund Mini



Egersund Park



Egersund Park



Florence



Glode



Glode



Halmstad



Halmstad  p.91	Halmstad  p.91	Halmstad  p.95	Halmstad  p.95	Hellvik  p.101	Hellvik  p.101
Kisa  p.115	Lillesand  p.133	Lillesand  p.133	Lillesand  p.135	Lillesand  p.135	Lofoten  p.257
Lofoten  p.259	London  p.387	London  p.387	London Big  p.387	Modena  p.401	Modena  p.401
Modena Big  p.401	Molde  p.145	Molde  p.145	Namsos  p.173	Namsos  p.173	Narvik  p.165
Oppland  p.185	Oppland  p.187	Oslo  p.267	Rimini  p.411	Rimini  p.411	Skara  p.203
Stavanger  p.211	Stavanger  p.211	Stavanger  p.211	Stockholm  p.279	Stockholm  p.279	Stockholm  p.279
Stockholm  p.283	Stockholm  p.283	Stockholm  p.287	Stockholm  p.287	Stockholm Big  p.287	Trysil  p.231

Pole


Asker



Asker




Bologna




Borg



Chelsea



Como



Egersund Park



Florence



Hammerfest



Karlstad



Kisa



Koster



Lofoten



London



London Big



Lund



Milano



Modena



Modena Big



Mora




Nice



Oslo



Poles



Rimini



Visby



Stockholm Big



Trysil



Ceiling


Bergen



Bornholm




Chelsea



Florence



Karlstad



Latina



Lofoten



Lofoten



Lofoten



London



London Big



Modena



Modena Big



Nidaros



Nidaros




Nidaros



Nordland



Oslo



Rondane



Sandvik



Sol



Recessed & Spot

Grimstad



Grimstad



Moss



Moss



Moss




Moss



Moss



Moss



Moss



Moss



Moss



Namsos



Namsos



Namsos Mini



Rena



Rena



Sande



Varberg



Arendal Mini

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. In a modern design combining crystal with steel, the Arendal Mini will work well in a wide variety of space settings. The soft, harmonious light filtered through the satin-finished glass will introduce a pleasant atmosphere wherever it is used. The wall version of the lamp, made of aluminium, will be perfect as entrance lighting.






Arendal Mini




Colour:

- Graphite
- Black

Colour temperature:




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).



Fully replaceable electrical kit.



Product Eco-friendly.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1251BL	LED	4W	330lm	3000K	> 50 000h	Dimmable
1251GR				4000K		
1252BL						
1252GR						
1250BL	E14	-	-	-	-	-
1250GR						



Arendal Mini



Colour:



Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Product Eco-friendly.

Accessories:


Art. 204


Ground anchor.



Art. 203

Concreting anchor.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1566BL	LED	4W	330 lm	3000K	>50 000h	Dimmable	
1566GA							
1566GR							
1567BL			345 lm	4000K			
1567GA							
1567GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1561BL	LED	4W	330 lm	3000K	>50 000h	Dimmable
1561GA						
1561GR						
1562BL			345 lm	4000K		
1562GA						
1562GR						



Arendal

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. Three different heights make it easier to choose the right lamp for the garden path, driveway, terrace or house access. The effect will be even more intriguing when used together in the arrangement. The crystal shade used in the luminaire, additionally satin-finished on the inside, provides a gentle beam of light. Arendal is modern elegance and this design never gets old.






Arendal



Colour:



Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source
1560BL	E27
1560GA	
1560GR	



Art	Type of light source
1565BL	E27
1565GA	
1565GR	



Art	Type of light source
1569BL	E27
1569GA	
1569GR	




Asker

Modern buildings need new solutions. The modern Asker luminaire family is ideally suited to this. Unconventional, minimalist lamps work well on a concrete or brick façade. But of course not only. The minimalist design makes it possible to match them to many variants of wall finishes, and the durable and proven materials used in the lamps guarantee many years of trouble-free use in difficult weather conditions. The lamps are also available in bollard and pole versions. The bold yet simple shapes have always been and will continue to be attractive to professional designers and individual investors alike.





Asker

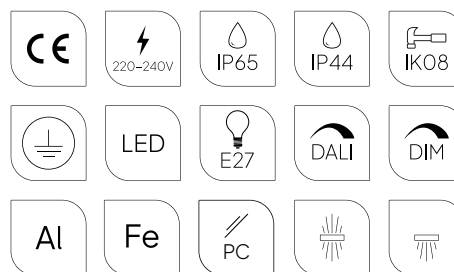

Colour:



Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1510AL	LED	8,8W	312lm	3000K	50 000h	Dimmable		
1510BL								
1510GR								
1510WH								
5102AL			329lm	4000K				
5102BL								
5102GR								
5102WH								
1720AL		8,4W	798lm	3000K	>70 000h			
1720BL								
1720GR								
1720WH								
5150AL		8,3W	901lm	4000K				
5150BL								
5150GR								
5150WH								
5160AL		9,9W	852lm	3000K		DALI2		
5160BL								
5160GR								
5160WH								
1721AL			852lm	3000K				
1721BL								
1721GR								
1721WH								
1513AL	E27	-	-	-	-			
1513BL								
1513GR								
1513WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1700GA	LED	8,4W	360lm	3000K	50 000h	Dimmable
5100GA			367lm	4000K		
1702GA	E27	-	-	-	-	-




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1511AL	LED	8.8W	156lm	3000K	50 000h	Dimmable		
1511BL								
1511GR								
1511WH								
5103AL			164lm	4000K				
5103BL								
5103GR								
5103WH								
1726AL		5,4W	429lm	3000K	70 000h			
1726BL								
1726GR								
1726WH								
5151AL			444lm	4000K				
5151BL								
5151GR								
5151WH								
5157AL		5,5W	465lm	4000K		DALI2		
5157BL								
5157GR								
5157 WH								
1727AL			426lm	3000K				
1727BL								
1727GR								
1727WH								
1514AL	E27	-	-	-	-			
1514BL								
1514GR								
1514WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1705GA	LED	8W	165lm	3000K	50 000h	Dimmable
5101GA			183lm	4000K		
1707GA	E27	-	-	-	-	-



Asker Big

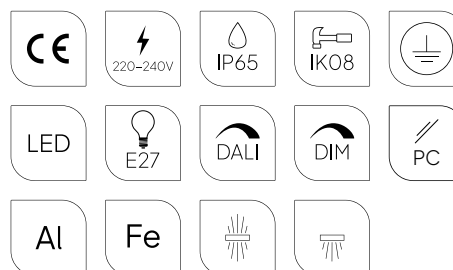

Colour:



Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1300AL	LED	8,3W	547lm	3000K	>72 000h	Dimmable		
1300BL								
1300GR								
1300WH								
5080AL		19,4W	1669lm	3000K	> 70 000h	DALI2		
5080BL								
5080GR								
5080WH								
5086AL		19,3W	1942lm	4000K				
5086BL								
5086GR								
5086WH								
5018AL		8,5W	550lm	4000K			Dimmable	
5018BL								
5018GR								
5018WH								
1306AL		13,7W	1280lm	3000K				
1306BL								
1306GR								
1306WH								
5105AL			1313lm	4000K				
5105BL								
5105GR								
5105WH								
1303AL	E27	-	-	-	-			
1303BL								
1303GR								
1303WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1710GA	LED	7,1W	649lm	3000K	70 000h	Dimmable
1712GA	E27	-	-	-	-	-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1302AL	LED	5,2W	306lm	3000K	>70 000h	Dimmable
1302BL						
1302GR						
1302WH						
5104AL			362lm	4000K		
5104BL						
5104GR						
5104WH						
5106AL		13,6W	656lm			
5106BL						
5106GR						
5106WH						
1308AL		8,4W	732lm	3000K	>72 000h	DALI2
1308BL						
1308GR						
1308WH						
5085AL		10,2W	843lm			
5085BL						
5085GR						
5085WH						
5087AL			960lm	4000K	>70 000h	
5087BL						
5087GR						
5087WH						
1305AL	E27	-	-	-	-	
1305BL						
1305GR						
1305WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1717GA	E27	-	-	-	-	-
1715GA	LED	5,3W	347lm	3000K	70 000h	Dimmable



Asker Bollard



Colour:




Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 1907

Concreting anchor



Art. 1908

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK
1311AL	LED	9,5W	585lm	3000K	50 000h	-	-	IK10
1311BL								
1311GR								
1314AL		7,7W	697lm		> 109 000h	Dimmable	IESNA type II/III	IK08
1314BL								
1314GR								
1315AL		7,8W	683lm			DALI2		
1315BL								
1315GR								
1316AL		7,7W	604lm			Dimmable	IESNA type V	
1316BL								
1316GR								
1317AL		7,8W	599lm			DALI2		
1317BL								
1317GR								
1318AL		7,7W	724lm	4000K		Dimmable	IESNA type II/III	
1318BL								
1318GR								
1319AL		7,8W	706lm			DALI2		
1319BL								
1319GR								
1320AL		7,7W	617lm			Dimmable	IESNA type V	
1320BL								
1320GR								
1322AL		7,8W	616lm			DALI2		
1322BL								
1322GR								
5210AL		10W	394lm	3000K	> 55 000h	Dimmable	-	IK10
5210BL				4000K				
5210GR								
5211AL								
5211BL								
5211GR								



Art	Type of light source	Watt	Luminous flux	Colour tempe- rature	L70/B50	Motion Detector
1338AL	LED	9,7W	585lm	3000K	50 000h	PIR
1338BL						
1338GR						
1339AL			640lm	4000K		
1339BL						
1339GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK	
1310AL	LED	9,5W	585lm	3000K	50 000h	On/Off	-	IK10	
1310BL									
1310GR									
5120AL			636lm	4000K					
5120BL									
5120GR									
5212AL		10W	394lm	3000K	> 55 000h	Dimmable			IK08
5212BL									
5212GR									
5213AL			458lm	4000K					
5213BL									
5213GR									
5214AL		7,7W	682lm	3000K	>109 000h		IESNA type II/III		
5214BL									
5214GR									
5215AL			654lm	4000K				IESNA type V	
5215BL									
5215GR									
5216AL			604lm	3000K					
5216BL									
5216GR									
5217AL		654lm	4000K						
5217BL									
5217GR									



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1336AL	LED	9,7W	585lm	3000K	50 000h	PIR
1336BL						
1336GR						
1337AL			636lm	4000K		
1337BL						
1337GR						



Asker Pole

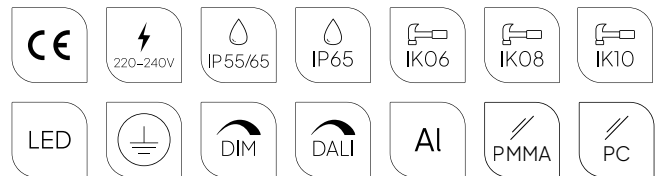

Colour:


-  Aluminium
-  Black
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 116

Concreting anchor
For 2160 & 2360 height




Art. 117


Anchoring support
For 2160 & 2360 height.



Art. 3091


Concreting anchor



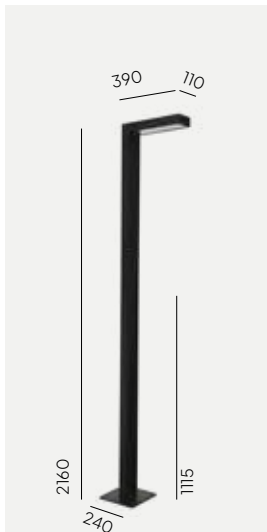


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1360AL	LED	12 W	1128lm	3000K	>72 000h	Dimmable	-
1360BL							
1360GR							

*All indexes also available in 4000K and 2700K versions.

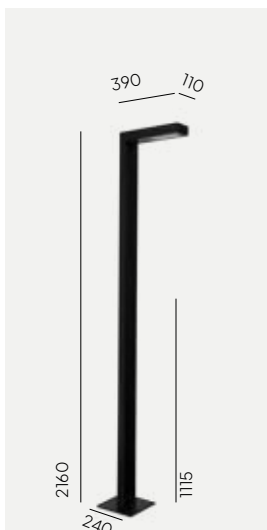


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1361AL		8,4W	1081lm		> 100 000h	DALI2 / NightDim	IESNA type V
1361BL							
1361GR							
1362AL		8,5W	1081lm		> 100 000h	DALI2 / NightDim	IESNA type V
1362BL							
1362GR							
1366AL		8,4W	1018lm		> 120 000h	DALI2 / NightDim	IESNA type III
1366BL							
1366GR							
1368AL		8,7W	1018lm		> 120 000h	DALI2 / NightDim	IESNA type III
1368BL							
1368GR							

*All indexes also available in 4000K and 2700K versions.

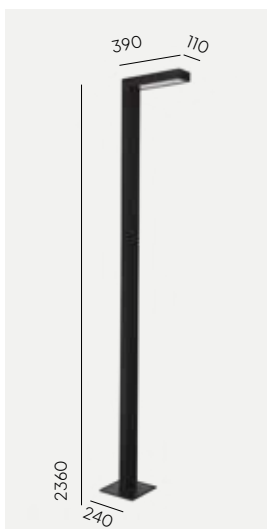


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1363AL	LED	12W	1128lm	3000K	> 72 000h	Dimmable	-
1363BL							
1363GR							

*All indexes also available in 4000K and 2700K versions.

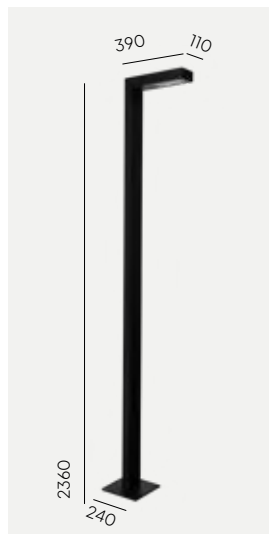


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1364AL	LED	8,4W	1033lm	3000K	> 100 000h	-	IESNA type V			
1364BL										
1364GR										
1365AL		8,5W	1085lm			DALI2 / NightDim				
1365BL										
1365GR										
1367AL		8,4W	1018lm		> 120 000h	-	IESNA type III			
1367BL										
1367GR										
1369AL		8,7W	1081lm			DALI2 / NightDim				
1369BL										
1369GR										

*All indexes also available in 4000K and 2700K versions.

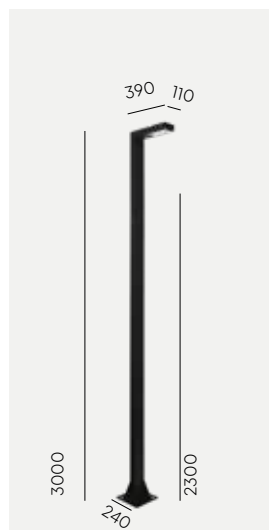

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
5222AL	LED	19,5W	2667lm	3000K	> 120 000h	DALI2 / NightDim	IESNA type V	
5222BL								
5222GR								
5224AL			2660lm		>100 000h	Dimmable		IESNA type III
5224BL								
5224GR								
5226AL		19,6W	2646lm			DALI2 / NightDim		
5226BL								
5226GR								
5228AL			2666lm		> 100 000h	Dimmable		
5228BL								
5228GR								

*All indexes also available in 4000K and 2700K versions.

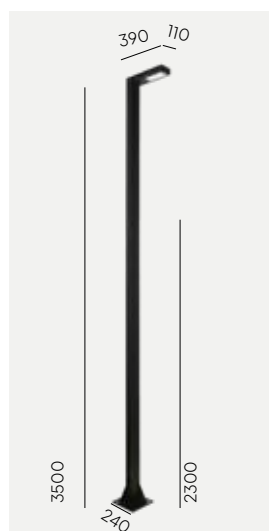

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IP
5200AL	LED	19,9W	2620lm	3000K	> 120 000h	DALI2 / NightDim	IESNA type V	IP55/65
5200BL								
5200GR								
5202AL		19,5W	2660lm		> 100 000h	Dimmable	IP65	
5202BL								
5202GR								
5204AL		19,9W	2620lm		> 120 000h	DALI2 / NightDim	IP55/65	
5204BL								
5204GR								
5206AL		19,6W	2666lm		> 100 000h	Dimmable	IP65	
5206BL								
5206GR								

*All indexes also available in 4000K and 2700K versions.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens						
4322AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III						
4322BL													
4322GR													
4323AL			2742lm	4000K			>100 000h	DALI2 / NightDim	IESNA type V				
4323BL													
4323GR													
4362AL			2711lm	3000K					>100 000h	DALI2 / NightDim	IESNA type V		
4362BL													
4362GR													
4363AL			2832lm	4000K							>100 000h	DALI2 / NightDim	IESNA type V
4363BL													
4363GR													

*Other two mounting options Ø76mm and Ø50mm available on request



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens						
4332AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III						
4332BL													
4332GR													
4333AL			5723lm	4000K			>100 000h	DALI2 / NightDim	IESNA type V				
4333BL													
4333GR													
4372AL			5723lm	3000K					>100 000h	DALI2 / NightDim	IESNA type V		
4372BL													
4372GR													
4373AL			6015lm	4000K							>100 000h	DALI2 / NightDim	IESNA type V
4373BL													
4373GR													


*Other two mounting options Ø76mm and Ø50mm available on request





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4342AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III
4342BL							
4342GR							
4343AL			2742lm	4000K			IESNA type V
4343BL							
4343GR							
4382AL			2711lm	3000K			IESNA type V
4382BL							
4382GR							
4383AL			2832lm	4000K			IESNA type V
4383BL							
4383GR							

*Other two mounting options Ø76mm and Ø50mm available on request

Asker Head

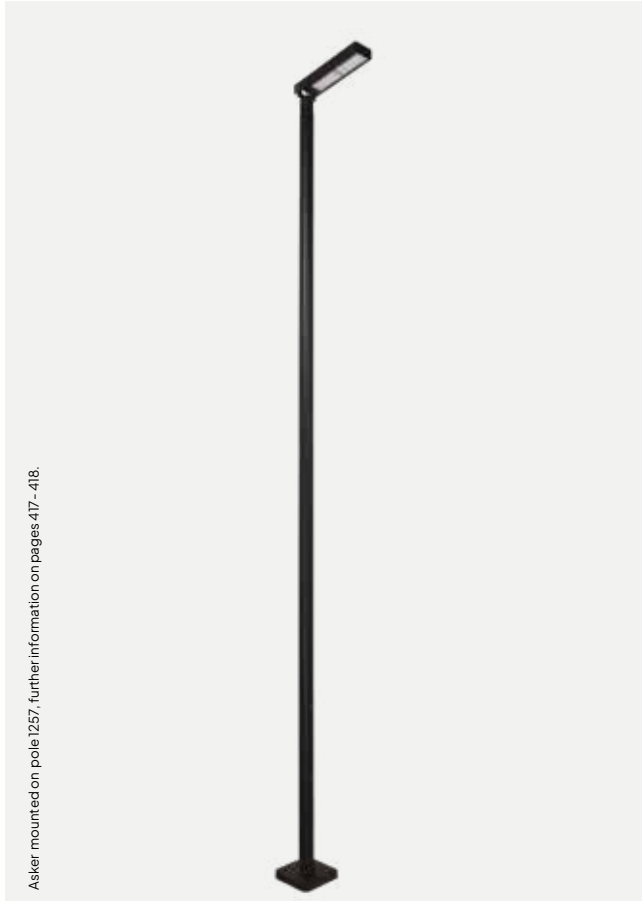

Asker mounted on pole 1257, further information on pages 417 - 418.

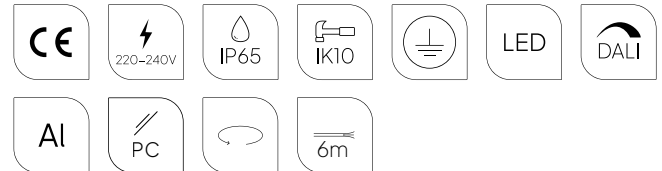

Colour:


-  Aluminium
-  Black
-  Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Wide range of light direction adjustment.



Product Eco-friendly.

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
4352AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III			
4352BL										
4352GR										
4353AL			5723lm	4000K						
4353BL										
4353GR										
4392AL			5723lm	3000K			IESNA type V			
4392BL										
4392GR										
4393AL			6015lm	4000K						
4393BL										
4393GR										

*Other two mounting options Ø76mm and Ø50mm available on request




Alta

Gardens and terraces are often extension of domestic spaces which require illumination. Oases of greenery and places of respite after daily chores require the right setting. This is where we spend time with family and friends, indulge in garden hobbies or celebrate moments of peace and quiet in solitude. It is worth emphasizing the qualities of our favourite places with gentle light. The Alta lamps, a subtle combination of wood and steel, are perfect for the garden and terrace. The interesting solution of light diffusion gives the desired effect of a sense of calm and harmony. A garden subtly illuminated by Alta luminaires is a tested way to truly relax.





Alta

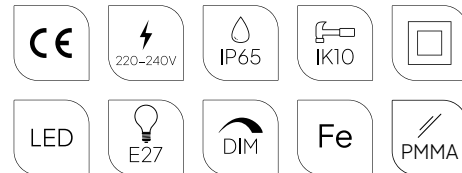

Colour:


- Black
- Galvanized

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
291BL	E27	-	-	-	-	-	
291GA							
1475BL	LED E27	5,9W	100lm	2700K	25 000h	Dimmable	
1475GA							
1479BL	LED	8,5W	146lm	3000K	> 50 000h		
1479GA			151lm	4000K			
5021BL							
5021GA							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control	
293BL	E27	-	-	-	-	-	
293GA							
1477BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable	
1477GA							
1476BL	LED	8,5 W	146lm	3000K	>50 000h		
1476GA			151lm	4000K			
1468BL							
1468GA							





Alta

scandinavian wood

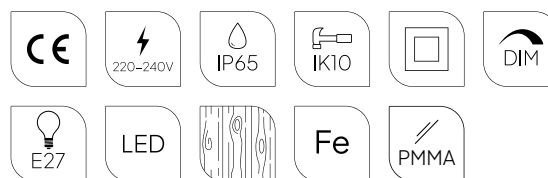

Colour:


-  Black
-  Galvanized

Wood:

-  Impregnated
-  Painted

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire housing
made of natural wood.




Product Eco-friendly.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1440BL	E27	-	-	-	-	-	
1440GA							
1665BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable	
1665GA			151lm	4000K			
1666BL							
1666GA							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1450BL	E27	-	-	-	-	-	
1450GA							
1669BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable	
1669GA			151lm	4000K			
1670BL							
1670GA							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1443BL	E27	-	-	-	-	-	
1443GA							
1673BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable	
1673GA			151lm	4000K			
1674BL							
1674GA							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1453BL	E27	-	-	-	-	-	
1453GA							
1677BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable	
1677GA			151lm	4000K			
1678BL							
1678GA							


Borg

The Borg luminaires family is a prime example of top quality and modern design. Borg will prove ideal for designing modern solutions to enhance urban living comfort. The Borg will be a great complement to leisurely, plant-filled squares with benches, but it will also fit in well with the landscape of an ordinary street and completely change its look. For many people, the city is a place to work and live. Therefore, designing comfortable urban landscapes requires the right eye-catching lighting. The minimalist and functional Borg will bring a modern style to any urban space.





Borg

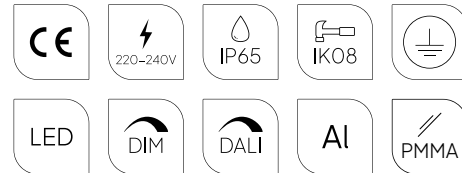

Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 202

Anchoring support



Art. 203

Concreting anchor







Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6190AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6190GR				4000K		
6191AL			1396lm	3000K		
6191GR				4000K		
6192AL		17,6W	1358lm	3000K		DALI2 / NightDim
6192GR				4000K		
6193AL			1396lm	3000K		
6193GR				4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6180AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable	
6180GR							
6181AL							
6181GR							
6183AL		15,9W	1396lm	4000K		DALI2 / NightDim	
6183GR							
6182AL		17,6W	1358lm	4000K			
6182GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
6170AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable		
6170GR								
6171AL			1396lm	4000K				
6171GR								
6173AL		17,6W	1396lm	4000K		DALI2 / NightDim		
6173GR								
6172AL			1358lm	3000K				
6172GR								






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6120AL	LED	16,1W	1358lm	3000K	> 72 000h	Dimmable	
6120GR							
6121AL		16W	1396lm	4000K			
6121GR							
6123AL		17,2W	1396lm	4000K		DALI2	
6123GR							
6122AL			1358lm	3000K			
6122GR							



Borg



Borg mounted on pole 3004, details on pages 417-418.

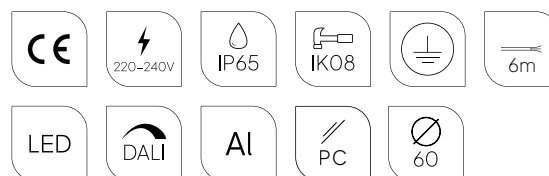

Colour:


- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:

Luminaires sold separately, recommended poles $\varnothing 60$, further information on pages 417-418.


Art. 7660

Adapter $\varnothing 60$ for install on pole $\varnothing 76$



Art. 154

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6150AL	LED	32W	3735lm	3000K	> 72 000h	-
6150GR						
5140AL			3928lm	4000K		
5140GR						
5141AL		32,6W	3735lm	3000K		DALI2/ NightDim
5141GR						
5142AL			3970lm	4000K		
5142GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens Control
6151AL	LED	32W	2996lm	3000K	> 72 000h	-
6151GR						
5145AL			3069lm	4000K		
5145GR						
5146AL		32,6	2953lm	3000K		DALI2/ NightDim
5146GR						
5147AL			3194lm	4000K		
5147GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6153AL	LED	53W	6900lm	3000K	> 72 000h	DALI2/Night-Dim
6153GR						
6154AL						D4i
6154GR						
6155AL			7200lm	4000K	> 100 000h	DALI2/Night-Dim
6155GR						
6156AL					> 72 000h	
6156GR						D4i

Bornholm

Minimalist design, classic shape. In a word, the captivating simplicity and versatility of this lamp, which offers the possibility of many applications. The Bornholm luminaire is durable and long-lasting, and although it is dedicated to external walls, it is just as suitable for a variety of uses indoors. It can be used as a ceiling or wall light. The milky shade minimizes glare, gives evenly spread light and provides comfort to the eye. The Bornholm will be the perfect piece to bring a warm accent to this type of modern interior. It looks great on raw concrete, but will actually be a good complement to any façade or wall.





Bornholm




Colour:

- ☒ Aluminium ☐ White
☒ Graphite

Colour temperature:

- 2700K* 3000K 4000K
☒ ☐ ☐
*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
541AL	LED	7,8W	428lm	3000K	>50 000h	Dimmable	
541GR							
541WH							
5121AL			443lm	4000K			
5121GR							
5121WH							
544AL		10W	417lm	3000K	50 000h	Motion Detector	
544GR							
544WH							
545AL		10,5W	464lm	4000K			
545GR							
545WH							
542AL		17,5W	794lm	3000K		-	
542GR							
542WH							
5122AL			836lm	4000K			
5122GR							
5122WH							

Bornholm can be mounted
as a ceiling fixture!



Egersund Mini

Energy efficiency, functionality and aesthetics. This rare combination has been achieved in this particular lamp. Innovation happens when it brings economic benefit.


Undoubtedly innovative product providing efficiency, durability and low energy consumption thanks to the state-of-the-art LED technology fitted to these luminaires.

Durable materials enclosed in a minimalist form and an original reflector in the shape of a metallized cone have given the lamp a completely unique appearance. It will be perfect for gardens, driveways and paths and will be a decoration for both traditional and modern homes.





Egersund Mini

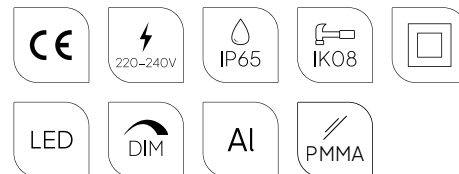

Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 205

Concreting anchor




Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1290AL	LED	9,1W	864lm	3000K	> 72 000h	Dimmable	
1290GR							
5117AL			917lm	4000K			
5117GR							
2302AL		9,6W	864lm	3000K		DALI	
2302GR							
2303AL			934lm	4000K			
2303GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1291AL	LED	9,1W	864lm	3000K	> 72 000h	Dimmable		
1291GR								
5118AL			917lm	4000K				
5118GR								
2314AL			864lm	3000K		DALI		
2314GR								
2315AL			915lm	4000K				
2315GR								





Egersund Mini

scandinavian wood



Colour:

-  Aluminium
-  Graphite

Wood:

-  Impregnated
-  Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing
made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2304AL	LED	9,1W	864lm	3000K	72 000h	Dimmable	
2304GR							
2305AL			873lm	4000K			
2305GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2308AL	LED	9,1W	864lm	3000K	72 000h	Dimmable	
2308GR							
2309AL			873lm	4000K			
2309GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2316AL	LED	9,1W	864lm	3000K	72 000h	Dimmable	
2316GR							
2317AL			873lm	4000K			
2317GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2320AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2320GR						
2321AL			873lm	4000K		
2321GR						

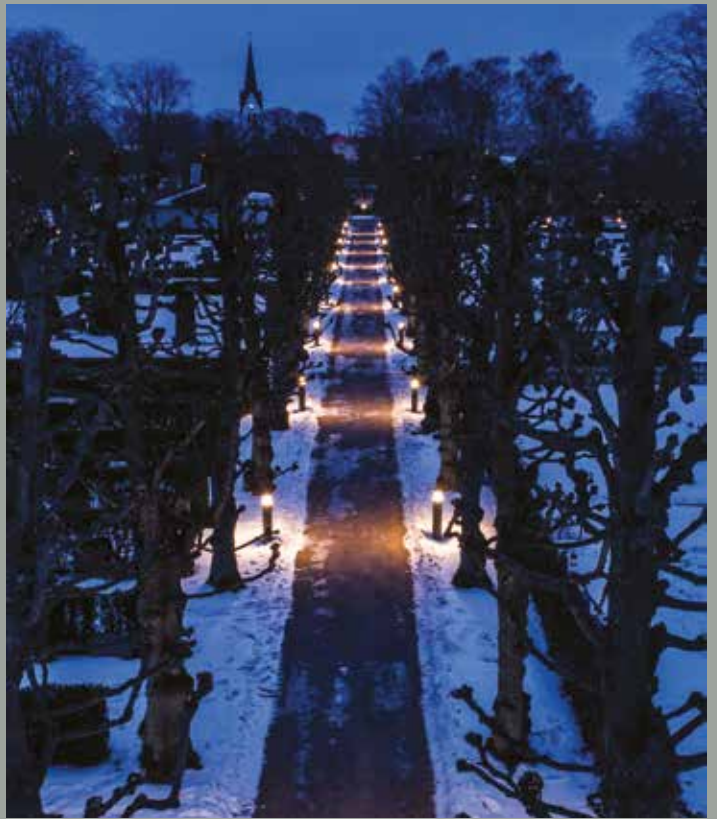



Egersund



Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 1230

Concreting anchor



Art. 1231

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1280AL	LED	20,3W	1681lm	3000K	> 162 000h	Dimmable	II
1280GR							
5068AL		21,9W		DALI2 / NightDim		I	
5068GR							
5014AL		20,3W	1782lm	4000K		Dimmable	II
5014GR							
5066AL		22W		DALI2 / NightDim		I	
5066GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1285AL	LED	22W	1586lm	3000K	> 162 000h	Dimmable	II
1285GR							
5069AL		21,9W	1681lm	DALI2 / NightDim		I	
5069GR							
5067AL		1782lm	4000K			Dimmable	II
5067GR							
5015AL							
5015GR							

Egersund Park

The world takes on different and better colours in the right light. And if, in addition, the light source is stylish, durable and energy-efficient, then we have a complete success. The luminaires from the Egersund Park family are not only intended for park settings and urban greenery. The versatility of the lamps and the possibility of a variety of applications has already been appreciated by many designers. The lightweight construction, simple shape and warm light, radically changes the perception of the space.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6080AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II
6080GR							
6081AL			935lm	4000K			
6081GR							
6082AL		23,9W	2258lm	3000K	> 102 000h	DALI2 / NightDim	I
6082GR							
6083AL			2319lm	4000K			
6083GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6090AL	LED	9,1W	907lm	3000K	> 102 000h	Dimmable	II
6090GR							
6091AL			935lm	4000K			
6091GR							
6092AL		23,9W	2258lm	3000K	> 102 000h	DALI2 / NightDim	I
6092GR							
6093AL			2319lm	4000K			
6093GR							

Egersund Park



Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 205

Concreting anchor




Art. 206

Anchoring support





Egersund Park

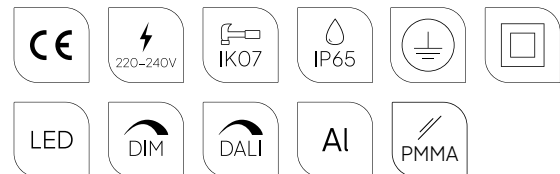


Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 6130

Concreting anchor




Art. 6132

Anchoring support 490mm




Art. 6135

Electric box



for Art. 6105, 6107, 6113, 6115

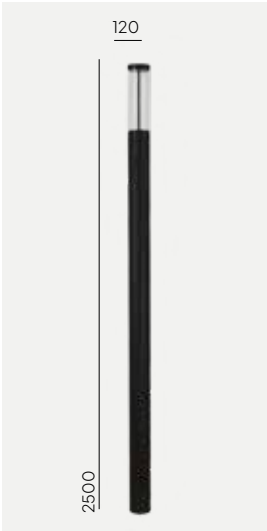

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6105AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II
6105GR							
6107AL			962lm	4000K			
6107GR							
6113AL		23,7W	2239lm	3000K	> 72 000h	DALI2	I
6113GR							
6115AL		23,9W	2314lm	4000K			
6115GR							
6117AL		10W	959lm	3000K	>50 000h	Dimmable	II
6117GR							
6118AL			1064lm	4000K			
6118GR							




Geneva

Geneva is a fashionable type of lamp, and is popular with designers and individual investors alike. The hallmark of the Geneva wall lamp is the light emitted in two directions.

Using an innovative plane lighting system, the glare effect has been eliminated.

The Geneva lamp is a luminaire with a wide range of applications. It is ideal for illuminating pillars and large wall areas, especially on public buildings. Geneva can also certainly transform the shape of a single-family house, not only with a modern character.

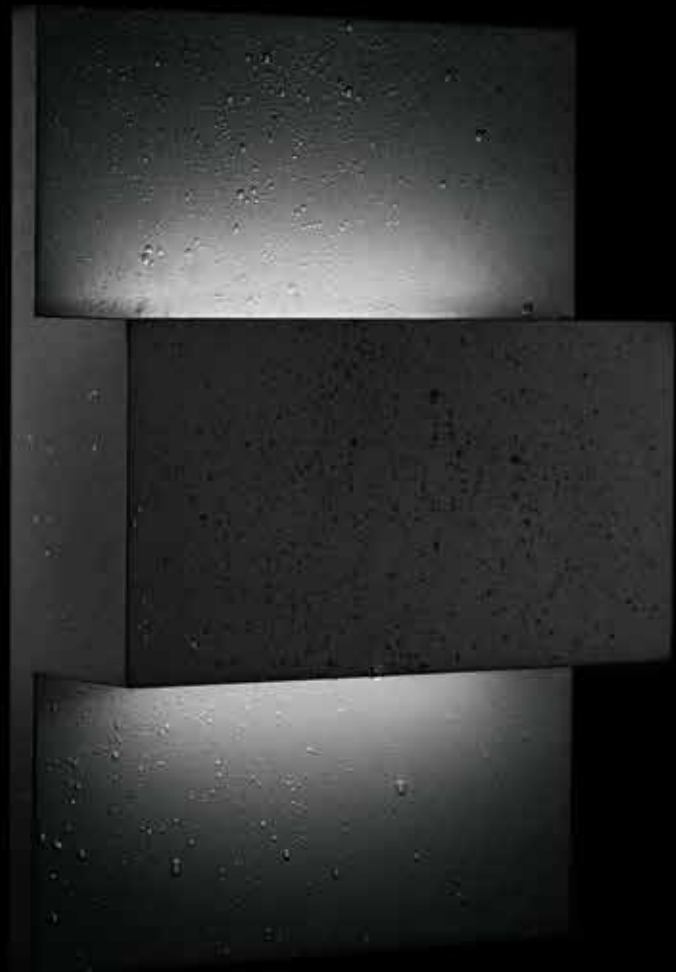



Geneva



Colour:

- ☒ Aluminium
 ☐ White


☒ Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1874AL	E27	-	-	-	-	-
1874GR						
1874WH						
1879AL	LED	8,3W	609lm	3000K	> 72 000h	Dimmable
1879GR						
1879WH						
1880AL		8,4W	656lm	4000K		
1880GR						
1880WH						



Grimstad




Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1545AL	LED	8,3W	67lm	3000K	> 100 000h	Dimmable
1545GR						
5025AL		7,4W	72lm	4000K		
5025GR						
1547AL	E14	-	-	-	-	-
1547GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1544AL	LED	5,3W	214lm	3000K	70 000h	Dimmable
1544GR						
1546AL	E14	-	-	-	-	-
1546GR						



Glode

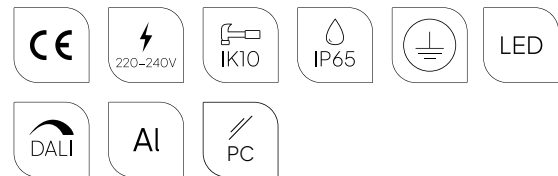

Colour:



Aluminium



Graphite



Black

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 112

Concreting anchor



Art. 113

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1262AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1262BL							
1262GR							
1261AL			7320lm	3000K			
1261BL							
1261GR							
1281AL		54W	7320lm	3000K		-	
1281BL							
1281GR							
1282AL			7745lm	4000K			
1282BL							
1282GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1264AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1264BL							
1264GR							
1263AL			7320lm	3000K			
1263BL							
1263GR							
1283AL		54W	7320lm	3000K		-	
1283BL							
1283GR							
1284AL			7745lm	4000K			
1284BL							
1284GR							

Halmstad

Thanks to Halmstad luminaires, garden spaces will acquire a unique charm. The bollard made of natural wood and steel works well with shrubs, perennials, stones and, above all, with the wooden architecture of the garden such as arbours, benches, trellises for climbing plants. Lamps in the garden are exposed to snow, sun, frost and moisture. They will serve for as long as possible heavily exposed to the test of time and weather. The elegant design with modern LED technology and the different sizes make it simply worth applying in the garden. The trees will grow larger, the plants will create a life-giving retreat and the reliable Halmstad luminaires will continue to enhance the beauty of the garden.






Halmstad



Colour:




Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor




Art. 206

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
296BL	E27	-	-	-	-	-	
296GA							
296GR							
1483BL	LED E27	5,9W	252lm	2700K	25 000h	Dimmable	
1483GA							
1483GR							
1482BL	LED	8,5W	292lm	3000K	> 50 000h		
1482GA							
1482GR							
5022BL			310lm	4000K			
5022GA							
5022GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
295BL	E27	-	-	-	-	-		
295GA								
295GR								
1488BL	LED E27	5,9W	252lm	2700K	25 000h	Dimmable		
1488GA								
1488GR								
1489BL	LED	8,5W	292lm	3000K	> 50 000h			
1489GA								
1489GR								
1346BL			310lm	4000K				
1346GA								
1346GR								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
210BL	E27	-	-	-	-	-	II
210GA							
210GR							
212BL	LED E27	5,9W	-	2700K	25 000h	Dimmable	
212GA							
212GR							
211BL	LED	10,5W	295lm	3000K	> 50 000h		I
211GA							
211GR							





Halmstad

scandinavian wood

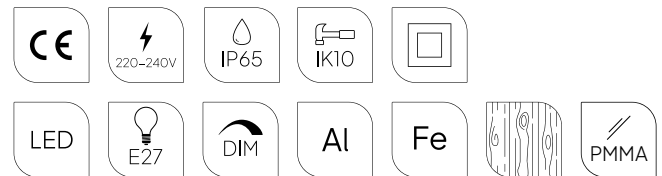

Colour:

-  Black
-  Galvanized
-  Graphite

Wood:

-  Impregnated
-  Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing
made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor




Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1410BL	E27	-	-	-	-	-	
1410GA							
1410GR							
1356BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable	
1356GA				3000K			
1356GR							
1419BL			292lm	3000K			
1419GA							
1419GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1400BL	E27	-	-	-	-	-		
1400GA								
1400GR								
1353BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable		
1353GA				3000K				
1353GR								
1409BL			292lm	3000K				
1409GA								
1409GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1413BL	E27	-	-	-	-	-		
1413GA								
1413GR								
1350BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable		
1350GA				3000K				
1350GR								
1417BL			292lm	3000K				
1417GA								
1417GR								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1403BL	E27	-	-	-	-	-	
1403GA							
1403GR							
1347BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable	
1347GA							
1347GR							
1407BL			292lm	3000K			
1407GA							
1407GR							





Halden

**Colour:****Colour temperature:**


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
510AL	E27	-	-	-	-	-	
510GR							
510WH							
515AL	LEDE27	5,9W	175lm	2700K	25000h	Dimmable	
515GR							
515WH							
5096AL	LED	8,4W	662lm	3000K	> 110 000h	DALI2	
5096GR							
5096WH							
517AL		8,5W	682lm	4000K	> 110 000h	Dimmable	
517GR							
517WH			690lm				
5020AL		8,8W		696lm	4000K	> 110 000h	DALI2
5020GR							
5020WH							
5097AL		8,8W	696lm	4000K	> 110 000h	DALI2	
5097GR							
5097WH							




Hellvik

The original bollard luminaire in a fashionable geometric shape will bring an aura of modernity to any private or public space. The Hellvik lamp is hard to pass by indifferently. Available in several sizes, this bollard offers a range of state-of-the-art light sources and controls to suit the most demanding users. Hellvik is the perfect choice for those who want to combine modernity with reliability and exceptional style. This lamp is a frequent choice of designers. The unusual design will work well in a wide variety of settings. Hellvik likes to play a leading role in the space. It likes to attract attention.





Hellvik

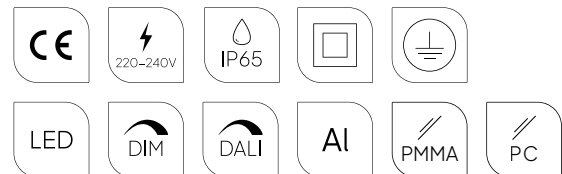

Colour:



Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 209

Concreting anchor




Art. 2409

Anchoring support
(2 pcs needed)






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
2410AL	LED	11,8W	1014lm	3000K	> 72 000h	Dimmable	II
2410BL							
2410GR			1072lm				
2411AL				4000K			
2411BL							
2411GR							
2412AL		20,2W	1747lm	3000K	> 72 000h	DALI2	I
2412BL							
2412GR			1803lm				
2413AL				4000K			
2413BL							
2413GR							
2414AL		8W	1038lm	3000K	> 100 000h	Dimmable	II
2414BL							
2414GR							
2415AL		8,1W	1007lm	4000K			
2415BL							
2415GR							
2416AL		11,9W	1537lm	3000K		DALI2	I
2416BL							
2416GR							
2417AL			1466lm	4000K			
2417BL							
2417GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
2400AL	LED	6,9W	531lm	3000K	> 72 000h	Dimmable	II
2400BL				3000K			
2400GR			575lm	4000K			
2401AL				4000K			
2401BL				4000K			
2401GR		10,1W	670lm	3000K	> 72 000h	DALI2	I
2402AL				3000K			
2402BL				3000K			
2402GR			808lm	4000K			
2403AL				4000K			
2403BL		8W	1038lm	3000K	> 100 000h	Dimmable	II
2403GR				3000K			
2404AL				3000K			
2404BL				3000K			
2404GR				3000K			
2405AL		8,1W	1007lm	4000K			
2405BL				4000K			
2405GR				4000K			
2406AL		11,9W	1537lm	3000K		DALI2	I
2406BL				3000K			
2406GR				3000K			
2407AL			1549lm	4000K			
2407BL				4000K			
2407GR				4000K			



Hitra

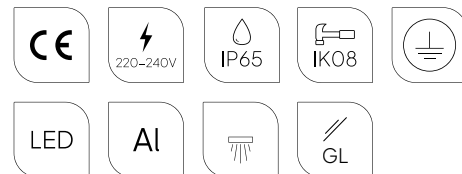

Colour:



Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:

Art. 151

Corner bracket tilt 15°/30°/45°






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
1330AL	LED	9,5W	920lm	3000K	50 000
1330GR					
1330WH					
5114AL			979lm	4000K	
5114GR					
5114WH					
1331AL		17,5W	1599lm	3000K	
1331GR					
1331WH					
5115AL			1717lm	4000K	
5115GR					
5115WH					



Hammerfest

A city vibrant with life, yet safe and comfortable is the perfect place for the Hammerfest pole. It refers in style to the classics, but is ultimately thoroughly modern after all. Hammerfest is a modern pole elegant by its minimalism. Thanks to its specially designed luminaire, the lamp has the advantage of illuminating a large area with a harmonious beam of light. Designers of urban spaces have the choice of a satin or milk glass diffuser, with which the urban evening space of streets, parks, promenades and squares can be balanced perfectly. Good lighting does not compete with architecture in the city. The task of successful illumination is to highlight its most significant qualities.





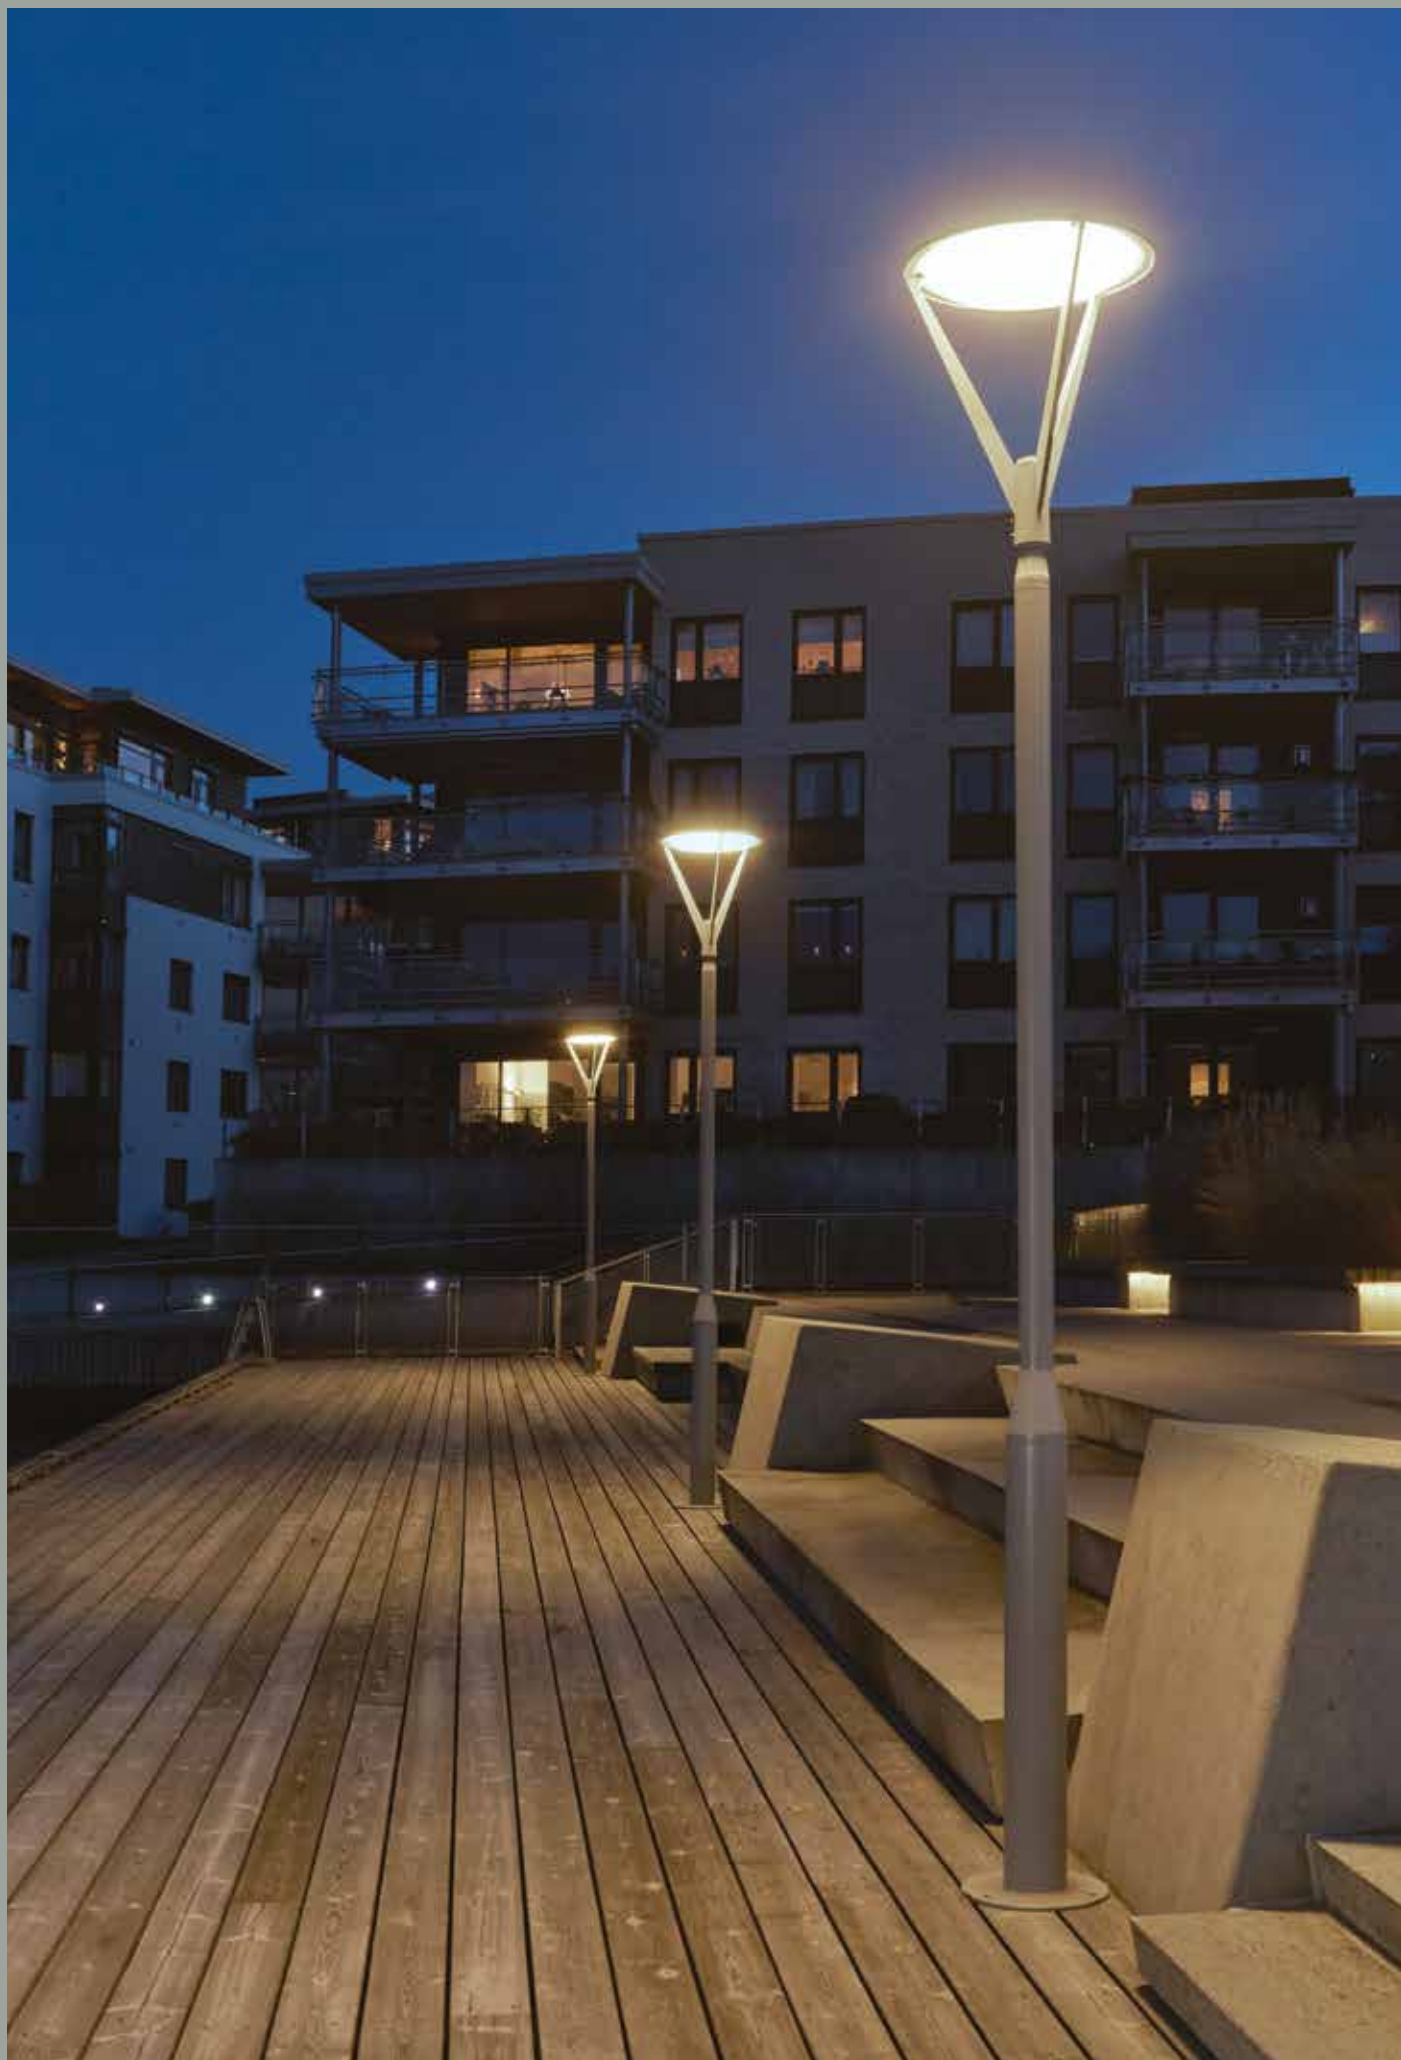

Hammerfest



Hammerfest mounted on pole 3004, further information on pages 417-418.

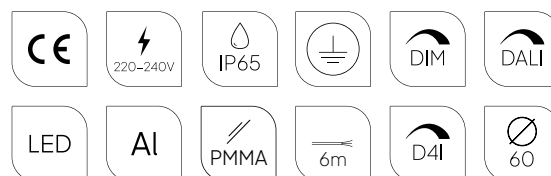

Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles $\varnothing 60$, further information on pages 417-418.


Art. 7665

Adapter $\varnothing 60$ for install on pole $\varnothing 76$



Art. 154

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
5135AL	LED	32,3W	3320lm	4000K	> 72 000h	-		
5135GR								
5136AL		32,5W	3117lm	3000K		DALI2/ NightDim		
5136GR			3310lm	4000K				
5137AL								
5137GR								
6141AL		32,7W	3227lm	3000K	> 50 000h	-		
6141GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
5130AL	LED	32W	3933lm	4000K	> 72 000h	-		
5130GR								
5131AL		32,5W	3974lm	3000K		DALI2/ NightDim		
5131GR			3721lm	4000K				
5132AL								
5132GR								
6140AL		26,4W	3321lm	3000K	> 54 000h	-		
6140GR								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens		
6146AL	LED	53W	6519lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type V		
6146GR			6802lm	4000K					
6148AL									
6148GR			6545lm	3000K		D4i			
6147AL									
6147GR									
6149AL			7375lm	4000K					
6149GR									


Kisa

Proven, robust, practical and at the same time suitable for illuminating the driveway is the Kisa luminaire equipped with the latest LED technology. The Kisa lamp in both bollard and pole versions utilizes a huge range of LED applications, offering several control versions and light directions. Light sources must be glare-free as this is a priority for safety and convenience. In Kisa this is ensured by the milky diffuser, giving an intense but non-glare beam of light. The luminaire is also ideal for energy-saving illumination in garden settings and walkway lighting.



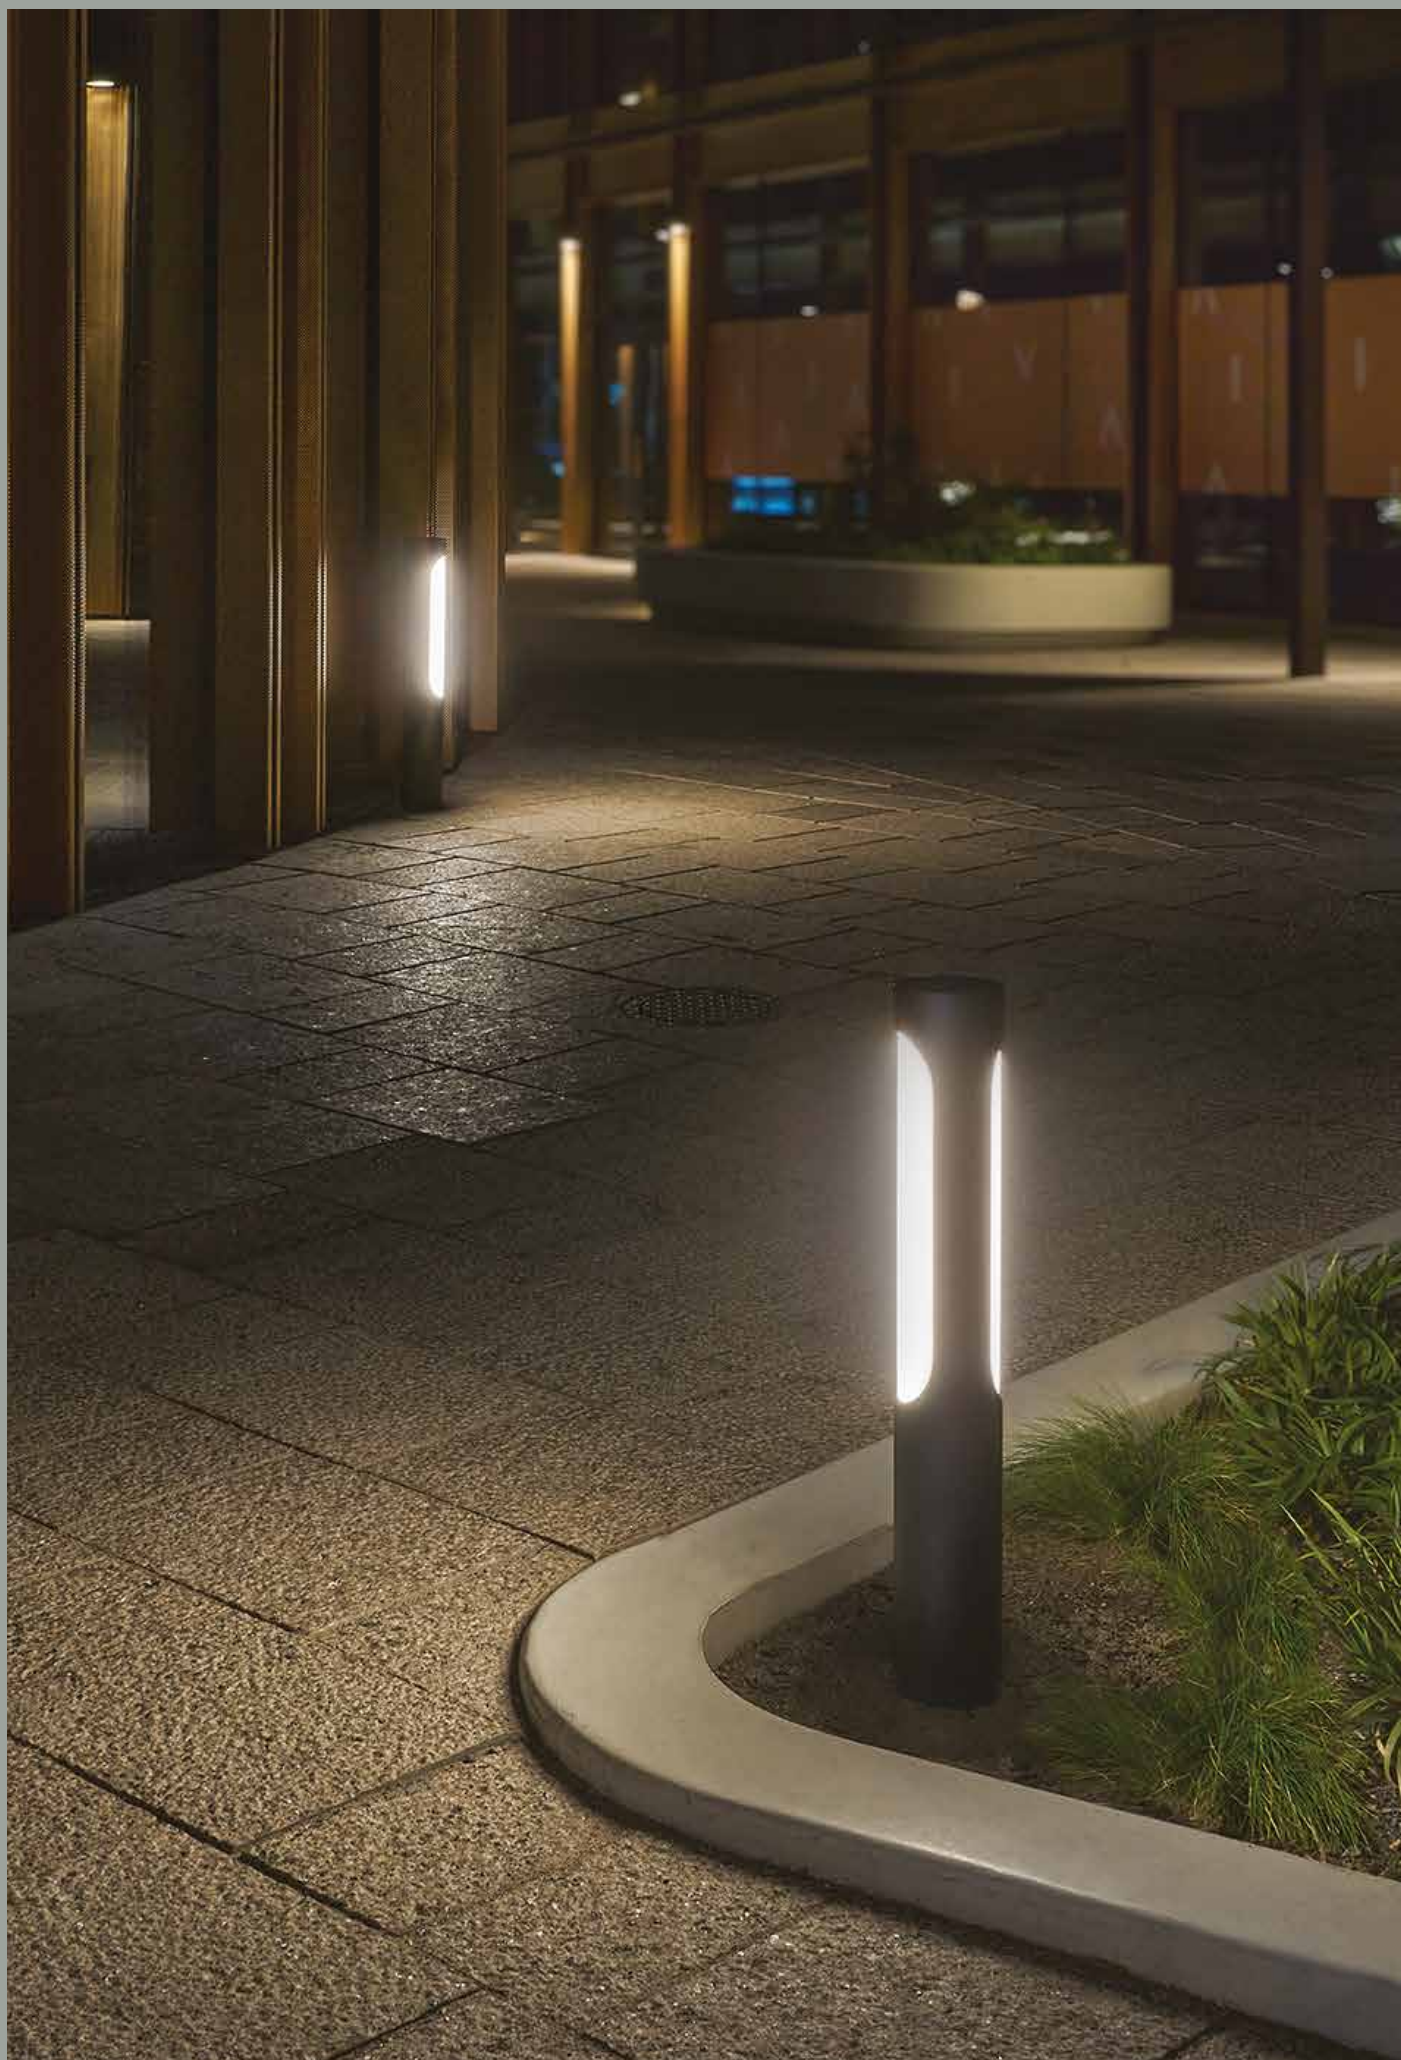

Kisa

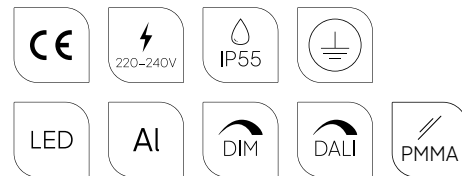

Colour:

-  Aluminium
-  Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5180AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable
5180GR						DALI2/ NighDim
5182AL		14,1W	1185lm	4000K		Dimmable
5182GR						DALI2/ NighDim
5181AL		8,8W	766lm	4000K		Dimmable
5181GR						DALI2/ NighDim
5183GR		14,1W	1222lm	4000K		Dimmable
5183GR						DALI2/ NighDim



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5184AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable	
5184GR							
5186AL		27W	2432lm			DALI2/ NighDim	
5186GR							
5187AL		2637lm	4000K				
5187GR							
5185AL		13,4W	1357lm				Dimmable
5185GR							

Kisa Pole

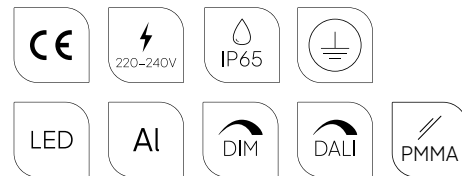

Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 6130

Concreting anchor




Art. 6132

Anchoring support 490mm



Art. 6135

Electric box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5190AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable
5190GR						
5191AL			766lm	4000K		
5191GR						
5192AL		14,1W	1185lm	3000K		DALI2/ NightDim
5192GR						
5193AL			1222lm	4000K		
5193GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5194AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable
5194GR						
5195AL			1357lm	4000K		
5195GR						
5196AL		27W	2432lm	3000K		DALI2/ NightDim
5196GR						
5197AL			2637lm	4000K		
5197GR						

Koster

The classics have always had, have and will always have their followers. The Koster lamp family is a proposal for universal lighting. Koster is a group of luminaires with a universal design characterised by a symmetrical light distribution. This design seems to tame the space, introducing calmness and predictability. The Koster luminaire can be used on the outside façade of a building, in the garden, next to a pavement. There are indeed many possibilities. It is available in a wall and two column variants – single and double.





Koster



Colour:

-  Aluminium
-  Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

Accessories:

Art. 158

Corner bracket





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP	Lens
724AL	E27	-	-	-	-	-	IP54	-
724GR								
725AL	LED	9,5W	872lm	3000K	50 000h	-		
725GR			1568lm					
1912AL		17,5W	1625lm	4000K				
1912GR								
5004AL		16,9W	2090lm	>100 000h	Dimmable	IP45		
5004GR			2007lm			IP54		
1834AL		19,6W	2747lm	3000K	>120 000h	DALI2/ NightDim	IP45	
1834GR			2718lm					4000K
1814AL		19,4W	2718lm	4000K				
1814GR								
1822AL		19,6W	2747lm	3000K				
1822GR			2718lm					
1842AL		19,4W	2718lm	4000K				
1842GR								








Koster Pole



Koster mounted on pole 1273, further information on pages 417 - 418.



Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles $\varnothing 50$ and $\varnothing 60$, further information on pages 417 - 418.


Art. 7660

Adapter $\varnothing 60$ for mounting on pole $\varnothing 76$




Art. 405

Concreting anchor



Art. 406

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1815AL	LED	14,4W	1991lm	3000K	> 120 000h	-	IESNA type V			
1815GR										
1823AL										
1823GR		19,4W	2747lm							
1843AL			2718lm							
1843GR										
1835AL		14,4W	2031lm	4000K						
1835GR										
5070AL		17,5W	1625lm	3000K	50 000h	-	-			
5070GR										
1915AL			1568lm							
1915GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1817AL	LED	14,4W	1991lm	3000K	> 120 000h	-	IESNA type V			
1817GR										
1825AL										
1825GR		19,4W	2747lm	DALI2/ NightDim						
1845AL			2718lm							
1845GR										
1837AL		14,4W	2031lm	4000K						
1837GR										
5006AL		17,5W	1625lm	50 000h	-	-				
5006GR										
1913AL			1568lm							
1913GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1816AL	LED	14,4W	1991lm	3000K	> 120 000h	-	IESNA type V			
1816GR										
1824AL										
1824GR		19,4W	2747lm	DALI2/ NightDim						
1844AL										
1844GR										
1836AL		14,4W	2031lm	4000K	> 120 000h					
1836GR										
5007AL		17,5W	1625lm	3000K	50 000h	-				
5007GR										
1914AL			1568lm							
1914GR										




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens
1155AL	E27	-	-	-	-	-	I	-
1155GR								
1157AL	LED	35W	3136lm	3000K	> 50 000h	-		
1157GR			3250lm	4000K				
1159AL								
1159GR		34W	3422lm	3000K	> 120 000h	Dimmable	II	
1165AL			3624lm	4000K				
1165GR								
1167AL			37W	3654lm				3000K
1167GR		3825lm		4000K				
1173AL								
1173GR								
1175AL								
1175GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens
1177AL	E27	-	-	-	-	-	I	-
1177GR								
1179AL	LED	35W	3136lm	3000K	> 50 000h	-		
1179GR			3250lm	4000K				
1181AL								
1181GR		34W	3422lm	3000K	> 120 000h	Dimmable	II	IESNA type V
1187AL			3624lm	4000K				
1187GR								
1189AL			37W	3654lm				
1189GR		3825lm		4000K				
1195AL								
1195GR								
1197AL								
1197GR								



Lillehammer

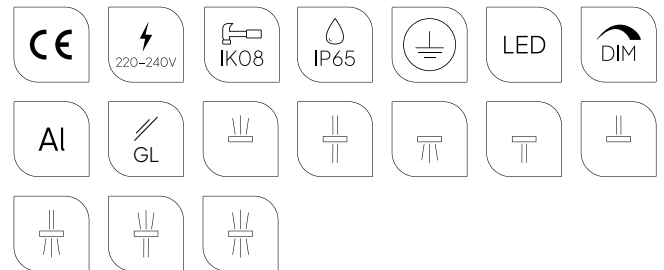

Colour:



Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Multiple light variants.





Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).








Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1580AL	LED	7,3W	126lm	3000K	> 102 000h	Dimmable		
1580BL								
1580GR								
1580WH								
5027AL			130lm	4000K				
5027BL								
5027GR								
5027WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1581AL	LED	7,3W	216lm	3000K	> 102 000h	Dimmable		
1581BL								
1581GR								
1581WH								
5028AL			231lm	4000K				
5028BL								
5028GR								
5028WH								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1582AL	LED	4W	107lm	3000K	> 102 000h	Dimmable		
1582BL								
1582GR								
1582WH								
5029AL			112lm	4000K				
5029BL								
5029GR								
5029WH								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1583AL	LED	7,3W	34lm	3000K	> 102 000h	Dimmable		
1583BL								
1583GR								
1583WH								
5030AL			38lm	4000K				
5030BL								
5030GR								
5030WH								






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1584AL	LED	4W	17lm	3000K	> 102 000h	Dimmable		
1584BL								
1584GR								
1584WH								
5031AL			18lm	4000K				
5031BL								
5031GR								
5031WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1585AL	LED	4W	17lm	3000K	> 102 000h	Dimmable		
1585BL								
1585GR								
1585WH								
1586AL			18lm	4000K				
1586BL								
1586GR								
1586WH								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1587AL	LED	4W	108lm	3000K	> 102 000h	Dimmable		
1587BL								
1587GR								
1587WH								
1588AL			135lm	4000K				
1588BL								
1588GR								
1588WH								





Lillesand

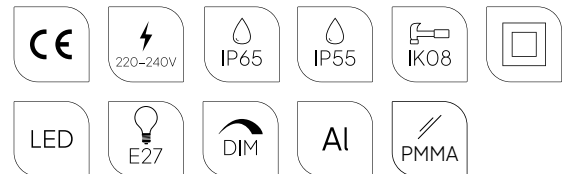

Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1380AL	E27	-	-	-	-	-	IP55
1380GR							
1382AL	LED E27	5,9W	495lm	2700K	25 000	Dimmable	
1382GR							
2330AL	LED	9,2W	897lm	3000K	> 72 000h		IP65
2330GR							
2331AL			956lm	4000K			
2331GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1383AL	E27	-	-	-	-	-	IP55
1383GR							
1384AL	LED E27	5,9W	495lm	2700K	25 000	Dimmable	
1384GR							
2342AL	LED	9,2W	897lm	3000K	> 72 000h		IP65
2342GR							
2343AL			956lm	4000K			
2343GR							

Lillesand

scandinavian wood



Colour:

- Aluminium
- Graphite

Wood:

- Impregnated
- Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing is made of natural wood.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 205


Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2334AL	LED	9,2W	897lm	3000K	72 000h	Dimmable	
2334GR							
2335AL			956lm	4000K			
2335GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2338AL	LED	9,2W	897lm	3000K	72 000h	Dimmable	
2338GR							
2339AL			956lm	4000K			
2339GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2346AL	LED	9,2W	897lm	3000K	72 000h	Dimmable	
2346GR							
2347AL			956lm	4000K			
2347GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
2350AL	LED	9,2W	897lm	3000K	72 000h	Dimmable	
2350GR							
2351AL			956lm	4000K			
2351GR							


Lysfjord

This wall fixture can be a real discovery for designers of urban spaces and individual investors. We have used innovative configurable lens systems that allows for original lighting effects. The Lysfjord luminaire, although simple in shape can conjure up an extraordinary atmosphere. The various options for setting the angle of incidence of wide or focused light rays, give a very wide range of possibilities for shaping the space with light. Outstanding quality from NORLYS including aluminium, safety glass, reliable and long-lasting LED.





Lysfjord

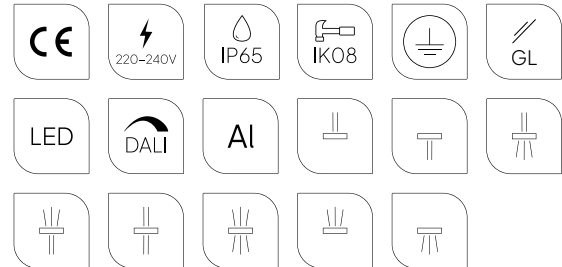

Colour:

- ☒ Aluminium
- ☒ Graphite
- ☒ Black
- ☐ White

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6401AL	LED	14,6W	946lm	3000K	> 70 000h	DALI2/ NightDim
6401BL						
6401GR						
6401WH						
6421AL				4000K		
6421BL						
6421GR						
6421WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6402AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6402BL						
6402GR						
6402WH						
6422AL				4000K		
6422BL						
6422GR						
6422WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6403AL	LED	26,5W	1814lm	3000K	> 70 000h	DALI2/ NightDim
6403BL						
6403GR						
6403WH						
6423AL				4000K		
6423BL						
6423GR						
6423WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6404AL	LED	26,5W	78lm	3000K	> 70 000h	DALI2/ NightDim
6404BL						
6404GR						
6404WH						
6424AL				4000K		
6424BL						
6424GR						
6424WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
6405AL	LED	26,5W	39lm	3000K	> 70 000h	DALI2/ NightDim		
6405BL								
6405GR								
6405WH								
6425AL			37lm	4000K				
6425BL								
6425GR								
6425WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
6406AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim		
6406BL								
6406GR								
6406WH								
6426AL			37lm	4000K				
6426BL								
6426GR								
6426WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
6407AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim		
6407BL								
6407GR								
6407WH								
6427AL			1016lm	4000K				
6427BL								
6427GR								
6427WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
6408AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim		
6408BL								
6408GR								
6408WH								
6428AL			1016lm	4000K				
6428BL								
6428GR								
6428WH								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2026AL	LED	8W	386lm	3000K	50 000	Dimmable
2026GR						
2027AL			438lm	4000K		
2027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
2028AL	LED	8W	386lm	3000K	50 000	PIR
2028GR						
2029AL			438lm	4000K		
2029GR						



Molde

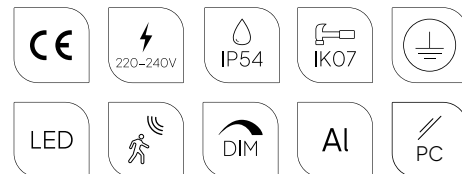**Colour:**

Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Molde

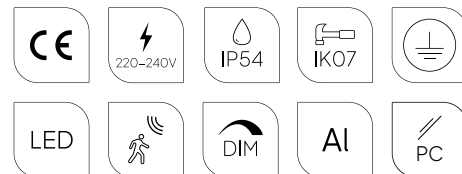

Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 1907


Concreting anchor



Art. 1908

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1901AL	LED	8W	386lm	3000K	50 000	Dimmable	
1901GR							
5107AL			438lm	4000K			
5107GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector	
1970AL	LED	8,2W	386lm	3000K	> 55 000h	PIR	
1970GR							
1972AL			438lm	4000K			
1972GR							





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1903AL	LED	8W	386lm	3000K	50 000	Dimmable
1903GR						
1904AL			438lm	4000K		
1904GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector	
1971AL	LED	8,2W	386lm	3000K	> 55 000h	PIR	
1971GR							
1973AL			438lm	4000K			
1973GR							

Mora

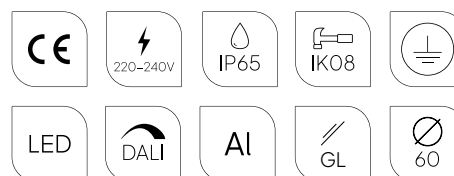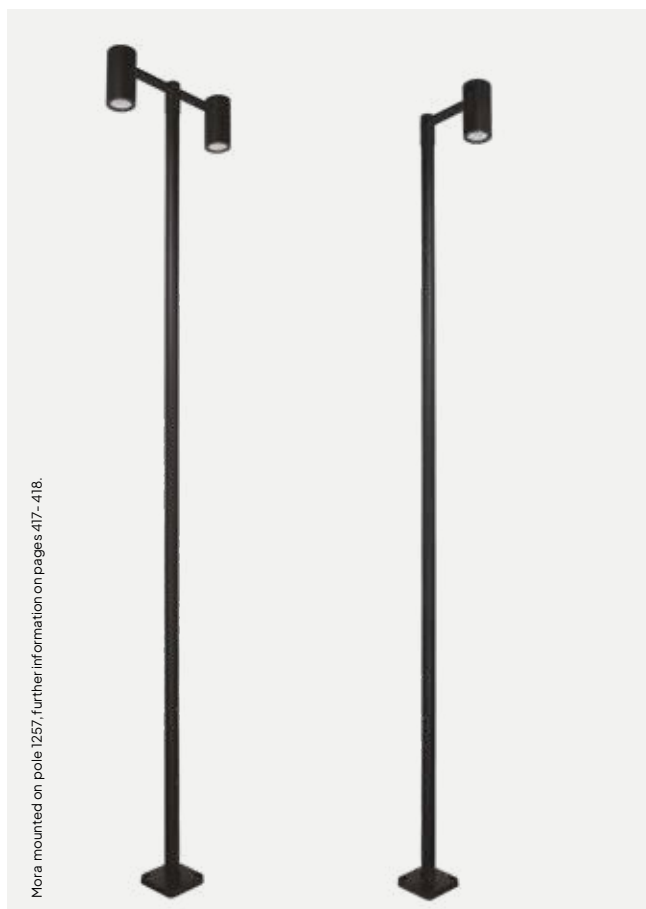

Colour:

- Aluminium
- Graphite
- Black

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Product Eco-friendly.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6466AL	LED	33,9W	3229lm	3000K	> 110 000h	DALI2/ NigthDim
6466BL						
6466GR						
6467AL		33,5W	3437lm	4000K		
6467BL						
6467GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
6460AL	LED	17,6W	1626lm	3000K	> 110 000h	DALI2/ NighDim		
6460BL								
6460GR								
6461AL			1735lm	4000K				
6461BL								
6461GR								

Moss

Moss spotlights combine a simple form with small dimensions. They are ideal for illuminating small architecture, individual trees or other elements of the garden layout important to the owner. Thanks to their small size, Moss can be hidden and the light will be the main feature. The undoubted strengths of this family of luminaires, thanks to the innovative use of a phase dimming system, are the ability to select the power, colour and brightness adjustment of the light source. The luminaires in the Moss family offer angle adjustment and versatility through a variety of mounting options. These include ceiling-mounted, pole-mounted, portable, driven into the ground and free-standing bollards variants.





Moss



Colour:

- Black
- Graphite

Colour temperature:

2700K* 3000K 4000K

○ ○ ○

*2700K on request only, contact your supplier.


CE	220-240V	IP65	⏏	↺
LED	DIM	AI	GL	36°



Product Eco-friendly.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Wide range of light direction adjustment.

Accessories:

Art. 6437
Plate





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6161BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6161GR						
6162BL			414lm	4000K		
6162GR						
6163BL		8W	686lm	3000K		
6163GR						
6164BL			749lm	4000K		
6164GR						

*All indexes also available with 15° or 24° light angle, contact your supplier.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6772BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6772GR						
6778BL		4W	389lm			
6778GR						

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Clamp
6732BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	Ø50
6732GR							
6750BL		8W	686lm				
6750GR							
6735BL		4W	389lm				Ø60
6735GR							
6753BL		8W	686lm				
6753GR							
6738BL		4W	389lm				Ø76
6738GR							
6756BL		8W	686lm				
6756GR							

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6702BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6702GR						
6706BL		4W	389lm			
6706GR						

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

Moss



Colour:


- Black
- Graphite

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.

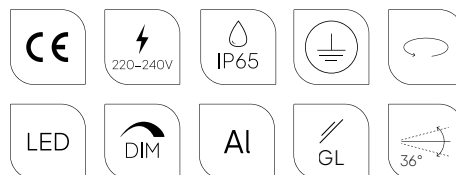

Product Eco-friendly.



Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:


Art. 145

Hermetic IP68 box with 3 lines




Art. 6729


Head mount



Art. 6434 (ø50), 6435 (ø60), 6436 (ø76)


Clams.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6165BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6165GR			414lm	4000K		
6166BL			686lm	3000K		
6166GR			749lm	4000K		
6167BL		8W	389lm	3000K		
6167GR			414lm	4000K		
6168BL			686lm	3000K		
6168GR			749lm	4000K		

*All indexes also available with 15° or 24° light angle, contact your supplier.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6602BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6602GR			414lm	4000K		
6603BL			686lm	3000K		
6603GR			749lm	4000K		
6600BL		8W	389lm	3000K		
6600GR			414lm	4000K		
6601BL			686lm	3000K		
6601GR			749lm	4000K		

*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6473BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6473GR		8W	686lm			
6471BL		4W	389lm			
6471GR		8W	686lm			


*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6485BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6485GR		8W	686lm			
6483BL		4W	389lm			
6483GR		8W	686lm			

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

Moss

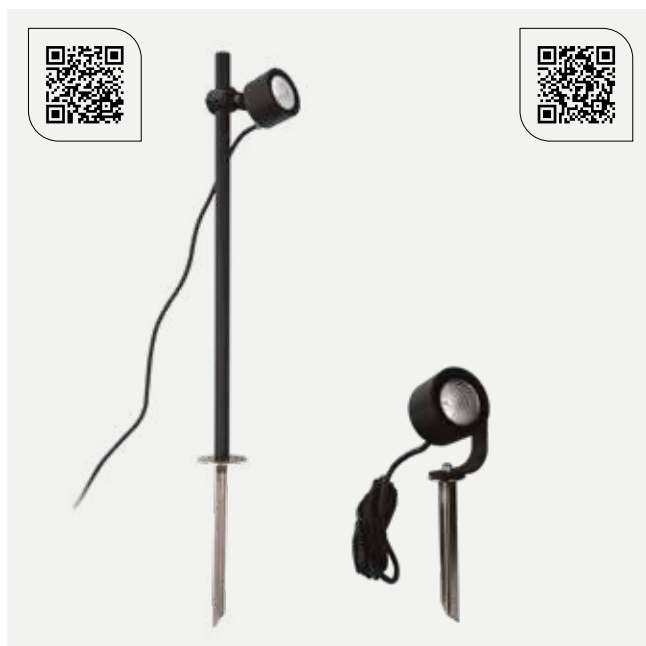

Colour:


- Black
- Graphite
- Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.

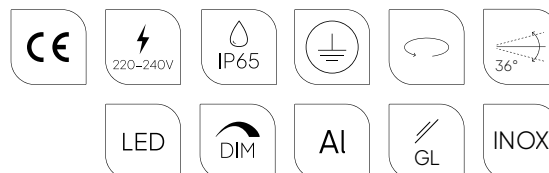

Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:


Art. 145


Hermetic IP68 box with 3 lines



Art. 146

8-way connection box IP68





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6346BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6346GR						
6346ST			414lm	4000K		
6352BL						
6352GR		8W	749lm	3000K'		
6352ST						
6376BL						
6376GR						
6376ST						
6370BL			686lm	3000K'		
6370GR						
6370ST						

*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6355BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6355GR						
6355ST			414lm	4000K		
6361BL						
6361GR		414lm	4000K			
6361ST						
6385BL		8W	749lm	4000K		
6385GR						
6385ST			686lm	3000K		
6379BL						
6379GR						
6379ST						

*All indexes also available with 15° or 24° light angle, contact your supplier.

Moss



Colour:


-  Black
-  Graphite
-  Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.

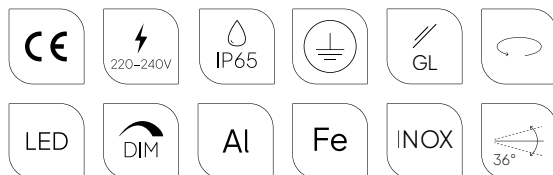

Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:


Art. 145

Hermetic IP68 box with 3 lines





Nordland

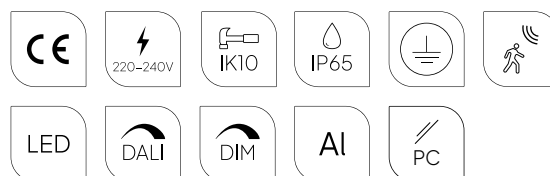

Colour:



Aluminium



White



Graphite

Colour temperature:

2700K* 3000K

4000K



*2700K on request only, contact your supplier.



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
718AL	LED	10W	574lm	3000K	50 000h	Dimmable	
718GR							
718WH							
5041AL		17,5W	1249lm	4000K		-	
5041GR							
5041WH							
5017AL							
5017GR		9,6W	594lm	4000K		Dimmable	
5017WH							
5016AL							
5016GR		18,5W	716lm	3000K		Motion Detector	
5016WH							
5043AL							
5043GR		17,5W	763lm	4000K		-	
5043WH							
5045AL							
5045GR							
5045WH		15,4W	933lm	4000K		Dimmable	
5047AL							
5047GR							
5047WH		16W	934lm	3000K		-	
5046AL							
5046GR							
5046WH	28,9W	2183lm	3000K		> 80 000h	DALI2	
5253AL							
5253GR							
5253WH		2308lm	4000K				
5255AL							
5255GR	2x E27	-	-			-	
5255WH							
7120AL							
7120GR	2x E27	-	-			-	
7120WH							





Nidaros



Colour:



Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Art. 3084

Distance.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2122AL	LED	8,3W	765lm	3000K	> 50 000h	Dimmable
2122BL						
2122GR						
2122WH						
2125AL		8,5W		4000K	50 000h	
2125BL						
2125GR						
2125WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2121AL	LED	7,8W	765lm	3000K	>110 000h	Dimmable
2121BL						
2121GR						
2121WH						
2124AL		8,5W		4000K	50 000h	
2124BL						
2124GR						
2124WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2120AL	LED	10,7W	631lm	3000K	50 000h	Dimmable
2120BL						
2120GR						
2120WH						
2123AL				4000K		
2123BL						
2123GR						
2123WH						


Narvik

It looks robust and it really is. This bollard is a luminaire with a legendary durability that will cope perfectly with any weather conditions. The path leading to the gate, the terrace where we spend long summer evenings, the driveway – the Narvik bollard will work everywhere. The ingeniously designed diffuser emits a rotationally symmetrical stream of light, and thanks to the use of the latest technology, the luminaire provides a maximum field of illumination in relation to its size. Narvik is the ideal solution for modern architecture. It is also available in a PRO version, which, with half the power of the luminaire compared to the basic model, provides 30% more light output.





Narvik

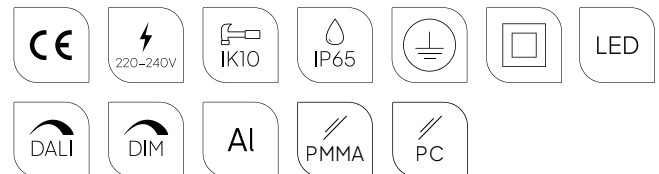

Colour:

Aluminium Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Vandal-resistant luminaire.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 505

Concreting anchor




Art. 110

Ground anchor



Art. 115

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
557AL	LED	21,8W	556lm	3000K	> 110 000h	-		
557GR						-		
509IAL		22,5W	597lm	3000K		DALI2/ NightDim		
509IGR						-		
5024AL		21,8W	564lm	4000K	> 50 000h	-		
5024GR			582lm			DALI2/ NightDim		
5090AL								
5090GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1735AL	LED	22,2W	1122lm	3000K	> 72 000h	DALI2/ NightDim
1735GR						-
1850AL						
1850GR						
559AL		13,4W	666lm	DIM		
559GR			757lm			
1733AL						
1733GR						
1737AL		22,2W	1162lm	4000K		DALI2/ NightDim
1737GR						
1851AL						
1851GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1736AL	LED	22,2W	1416lm	3000K	> 72 000h	DALI2/ NightDim	
1736GR						-	
1852GR							
1852GR							
553AL		13,6W	853lm			DIM	
553GR							
1734AL		13,4W	959lm				
1734GR							
1738AL		22,2W	1475lm	4000K			DALI2/ NightDim
1738GR							-
1853AL							
1853GR							

Namosos

Lighting should give us a feeling of safety and comfort when moving around. Namosos will be perfect for lighting stairs, steps, staircases and passageways. We recommend Namosos where you need to illuminate the most important points of your property, especially if there is a difference in level. This unusual luminaire will work perfectly as a modern lighting solution for wall surfaces and guarantees even illumination of the area under the lams. It looks equally good built into the wall as well as the bollard version.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1341AL	LED	4W	123lm	3000K	> 50 000	Dimmable
1341GR						
5156AL		4,2W	162lm	4000K		
5156GR						



Namsos

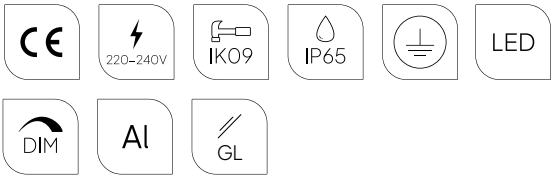

Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Art. 157

Mounting distance





Namsos



Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 112

Concreting anchor




Art. 113

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1931AL	LED	8,4W	566lm	3000K	> 102 000h	Dimmable	
1931GR							
5012AL		8,6W	612lm	4000K			DALI2
5012GR							
6035AL		13,8W	877lm	3000K		Dimmable	
6035GR			904lm				
6033AL							
6033GR							
1921AL		13,6W	843lm				
1921GR							
1922AL		14W	907lm	4000K			
1922GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1932AL	LED	8,6W	566lm	3000K	> 102 000h	Dimmable	
1932GR							
5013AL			612lm	4000K			
5013GR							
6036AL		13,8W	877lm	3000K		DALI2	
6036GR							
6034AL			904lm	3000K			
6034GR							
1923AL		13,6W	843lm	3000K		Dimmable	
1923GR							
1924AL		14W	907lm	4000K			
1924GR							





Namsos



Colour:

-  Aluminium
-  Graphite
-  Galvanized

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control				
1929AL	LED	13,6W	843lm	3000K	> 102 000h	Dimmable				
1929GR										
1930AL		8,4W	566lm							
1930GR										
6032AL		13,8W	904lm	4000K		DALI2				
6032GR										
1934AL		14W	907lm			Dimmable				
1934GR										
5011AL		8,6W	612lm							
5011GR										
6031AL		13,8W	877lm			DALI2				
6031GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1933GA	LED	5,2W	295lm	3000K	> 70 000	Dimmable
5116GA			689lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1340AL	LED	4W	47lm	3000K	> 50 000h	Dimmable
1340GR						

Namsos Mini



Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





Nice

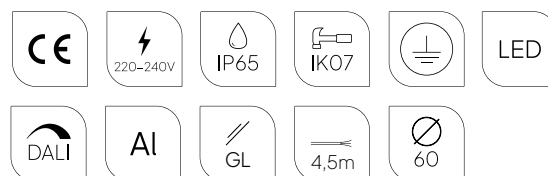

Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles $\varnothing 60$, further information on pages 417- 418.


Art. 154

Wall mounting arm



Art. 7665

Reduction for fittings $\varnothing 60$ for mounting on a pole $\varnothing 76$





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
777AL	LED	38W	3029lm	3000K	> 110 000h	-
777GR						
5089GR						
5089AL		36,3W	2964lm	4000K	> 50 000h	DALI2/ NightDim
5088AL						
5088GR						
5001AL		38W	3092lm	4000K	> 110 000h	-
5001GR						



Oppland

The Oppland bollards will work fantastically between a garden path and a flower bed. They will illuminate a passage, add mystery to the plants and give depth to the garden.

The Oppland luminaires family stands for energy-saving LED technology, minimalist yet elegant design, durability of materials and reliability. Choice between a modern-style aluminium body or a wooden body, in two colours, in arrangements closer to nature. Oppland bollards will not only provide exceptionally effective lighting. They will bring an elegant and modern accent to any environment that is sure to attract attention. Oppland simply illuminates beautifully.





Oppland



Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1324AL	LED	8,2W	304lm	3000K	> 171 460h	DALI2
1324GR						
1321AL					> 50 000h	Dimmable
1321GR						
5123AL	LED	9,3W	313lm	4000K	> 50 000h	Dimmable
5123GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2360AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2360GR						
2361AL		10,1W	312lm	4000K		
2361GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2364AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2364GR						
2365AL		10,1W	312lm	4000K		
2365GR						

Oppland

scandinavian wood



Colour:

- Aluminium
- Graphite

Wood:

- Impregnated
- Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.




Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 205


Concreting anchor



Art. 206

Anchoring support



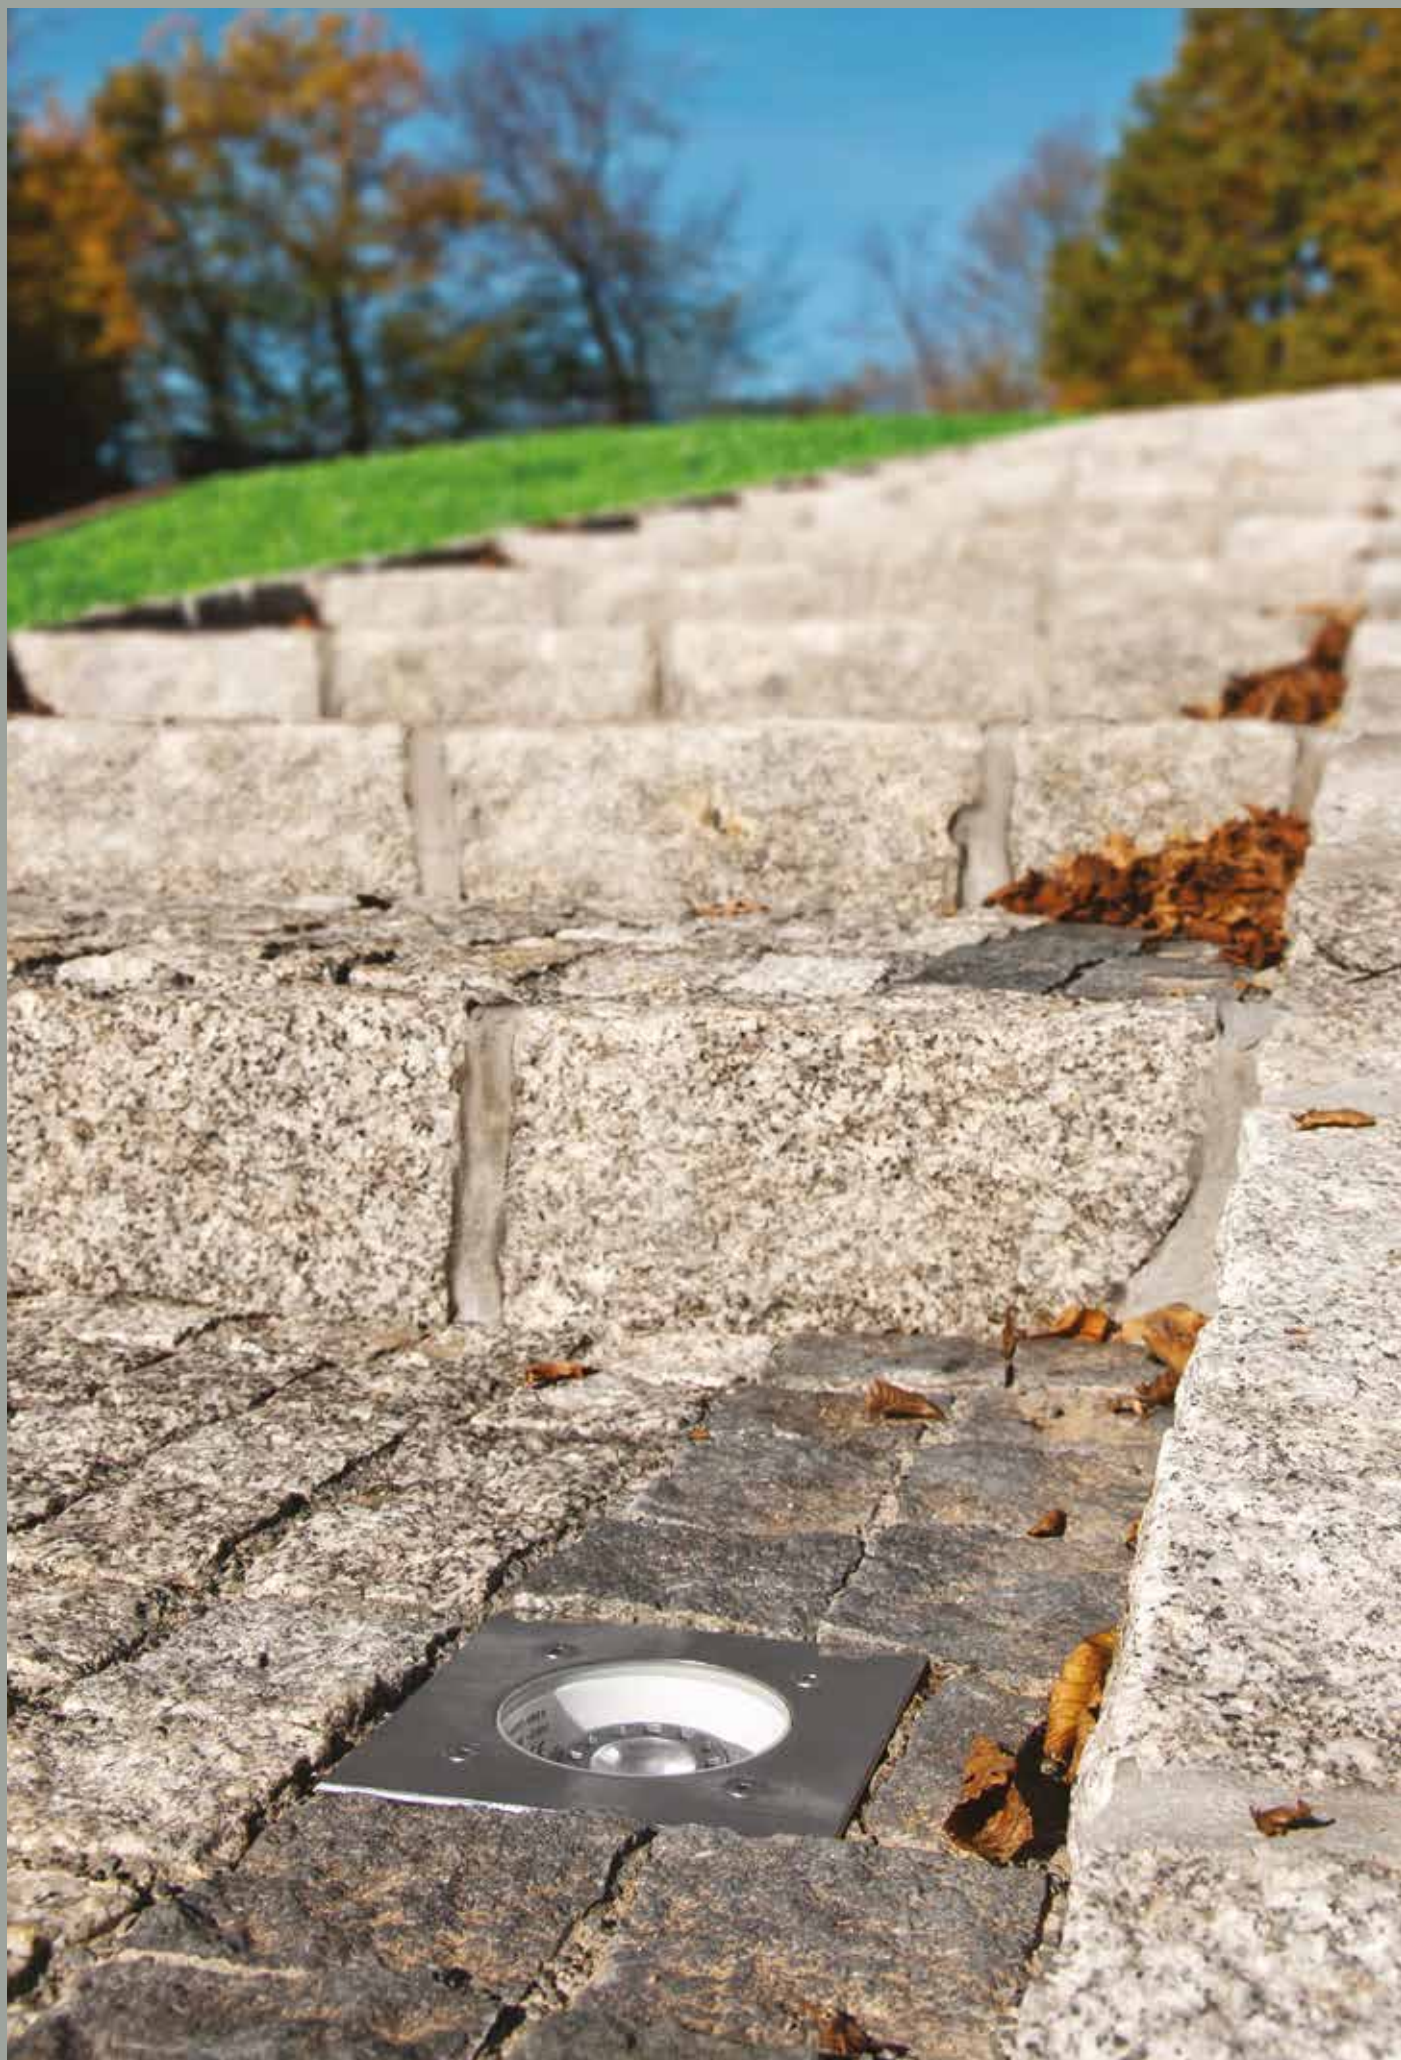

Rena



Colour:


Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.




Multiple light variants.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

Accessories:


Art. 142

Ground assembly module




Art. 145

Hermetic 3-track box



Art. 146

Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1551ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1553ST		-	-	-	-	-
1762ST	LED	4W	318lm	3000K	50 000h	Dimmable
1763ST			369lm	4000K		
1766ST		8W	672lm	3000K		
1767ST			731lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1641ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1643ST		-	-	-	-	-

* For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1555ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1557ST		-	-	-	-	-
1752ST	LED	4W	178lm	3000K	50 000h	Dimmable
1753ST			180lm	4000K		
1756ST		8,8W	314lm	3000K		
1757ST		8,5W	330lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1645ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1647ST		-	-	-	-	-

*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1550ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1552ST		-	-	-	-	-
1760ST	LED	4W	318lm	3000K	50 000h	Dimmable
1761ST			369lm	4000K		
1764ST		8W	672lm	3000K		
1765ST			731lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1640ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1642ST		-	-	-	-	-

*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1554ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1556ST		-	-	-	-	-
1750ST	LED	4,2W	178lm	3000K	> 50 000h	Dimmable
1751ST		4W	180lm	4000K		
1754ST		8W	314lm	3000K		
1755ST			330lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1644ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1646ST		-	-	-	-	-

For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Rena Cover





Colour:

- Black
- Graphite

Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.

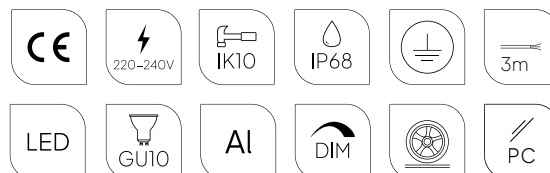


Multiple light variants.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

Accessories:


Art. 142

Power cord cover




Art. 145

Hermetic 3-track box



Art. 146

Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1632BL	LED GU10	-	-	-	-	-	
1632GR							
1633BL		5,5W	13lm	3000K	40 000	Dimmable	
1633GR							
1770BL	LED	4W	24lm	3000K	50 000h	Dimmable	
1770GR			25lm	4000K			
1771BL							
1771GR							
1774BL		8,7W	48lm	3000K			
1774GR							
1775BL		8W	48lm	4000K			
1775GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1630BL	LED GU10	-	-	-	-	-	
1630GR							
1631BL		5,5W	13lm	3000K	40 000	Dimmable	
1631GR							
1768BL	LED	4W	24lm	3000K	50 000h	Dimmable	
1768GR			28lm	4000K			
1769BL							
1769GR							
1772BL		8W	48lm	3000K			
1772GR							
1773BL			56lm	4000K			
1773GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1650BL	LED GU10	-	-	-	-	-
1650GR		-	-	-	-	-
1651BL		5,5W	13lm	3000K	40 000	Dimmable
1651GR		5,5W	13lm	3000K	40 000	Dimmable



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1652BL	LED GU10	-	-	-	-	-
1652GR		-	-	-	-	-
1653BL		5,5W	13lm	3000K	40 000	Dimmable
1653GR		5,5W	13lm	3000K	40 000	Dimmable



Rondane



Colour:

Aluminium Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
538AL	E27	-	-	-	-	-	
538GR							
537AL	LED	8,5W	305lm	3000K	> 110 000h	Dimmable	
537GR							
539AL		17,5W	732lm		50 000h	-	
539GR							
548AL		9,5W	345lm				
548GR							

*All indexes also available in 4000K and 2700K versions.



Sandvik



Colour:



Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 148


Corner bracket for art. 1730, 1731, 1732, 5152




Art. 131

Corner bracket for art 1740, 1741, 1742, 5153






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1730AL	LED GU10	-	-	-	-	-
1730BL						
1730GR						
1730WH						
1731AL		7,8W	420lm	2700K	40 000h	Dimmable
1731BL						
1731GR						
1731WH						
1732AL	LED	16W	1126lm	3000K	> 50 000	
1732BL						
1732GR						
1732WH						
5152AL			1350lm	4000K		
5152BL						
5152GR						
5152WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1740AL	LED GU10	-	-	-	-	-
1740BL						
1740GR						
1740WH						
1741AL		3,9W	210lm	2700K	40 000h	Dimmable
1741BL						
1741GR						
1741WH						
1742AL	LED	8W	563lm	3000K	> 50 000h	
1742BL						
1742GR						
1742WH						
5153AL			675lm	4000K		
5153BL						
5153GR						
5153WH						

Sandvik

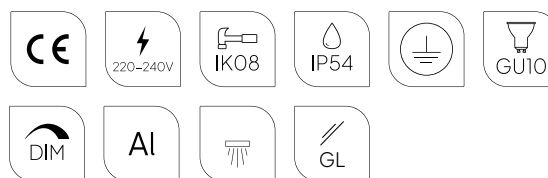

Colour:

- ☒ Aluminium
 ☒ Graphite
 ☐ Black
 ☐ White

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
795AL	LED GU10	3,9W	210lm	2700K	40 000h	Dimmable
795BL						
795GR						
795WH						
796AL						
796BL						
796GR						
796WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
2937AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III
2937BL							
2937GR							
2935AL			699lm	3000K			IESNA Type V
2935BL							
2935GR							
2939AL			604lm	3000K			
2939BL							
2939GR							
2941AL			616lm	4000K			
2941BL							
2941GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	Energy distributor ~230V										
2945AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III	E(Uni)										
2945BL																		
2945GR																		
2943AL			699lm	3000K			>268 210h		Dimmable	IESNA Type II/III	E(Uni)							
2943BL																		
2943GR																		
2947AL			604lm	3000K						>268 210h		Dimmable	IESNA Type II/III	E(Uni)				
2947BL																		
2947GR																		
2949AL			616lm	4000K									>268 210h		Dimmable	IESNA Type V	E(Uni)	
2949BL																		
2949GR																		

Skara

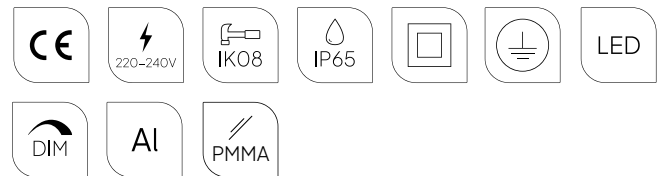

Colour:



Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Art. 2934

Concreting anchor





Sande



Colour:

- Graphite
- Black

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

Accessories:


Art. 1233

Cap



Art. 1234

Ground anchor.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Light angle
1592BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable	36°
1592GR							
1593BL	LED	8,6W	566lm	3000K	> 145 000h	Dimmable	40°
1593GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Light angle
1598BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable	36°
1598GR							
1594BL	LED	8,6W	738lm	3000K	> 145 000h	Dimmable	40°
1594GR							



Sol



Colour:



Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:

Art. 3095

Distance





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
4051AL	LED	19,1W	2101lm	3000K	> 100 000h	Dimmable		
4051BL								
4051GR								
4051WH								
4052AL			2421lm	4000K				
4052BL								
4052GR								
4052WH								
4055AL			2101lm	3000K		DALI2		
4055BL								
4055GR								
4055WH								
4056AL			2421lm	4000K				
4056BL								
4056GR								
4056WH								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
4053AL	LED	19,3W	1655lm	3000K	> 100 000h	Dimmable	
4053BL							
4053GR							
4053WH							
4054AL			1905lm	4000K			
4054BL							
4054GR							
4054WH							
4057AL			1663lm	3000K			
4057BL							
4057GR							
4057WH							
4058AL			1912lm	4000K			
4058BL							
4058GR							
4058WH							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
4043AL	LED	19,3W	1938lm	3000K	> 100 000h	Dimmable		
4043BL								
4043GR								
4043WH								
4044AL								
4044BL								
4044GR								
4044WH								
4047AL		1924lm	3000K	> 100 000h	DALI2			
4047BL								
4047GR								
4047WH								
4048AL		19,1W	2227lm			4000K	> 100 000h	DALI2
4048BL								
4048GR								
4048WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4045AL	LED	19,3W	1633lm	3000K	> 100 000h	Dimmable
4045BL						
4045GR						
4045WH						
4046AL		19,1W	1890lm	4000K		
4046BL						
4046GR						
4046WH						
4049AL		19,3W	1618lm	3000K		DALI2
4049BL						
4049GR						
4049WH						
4050AL		19,1W	1866lm	4000K		
4050BL						
4050GR						
4050WH						

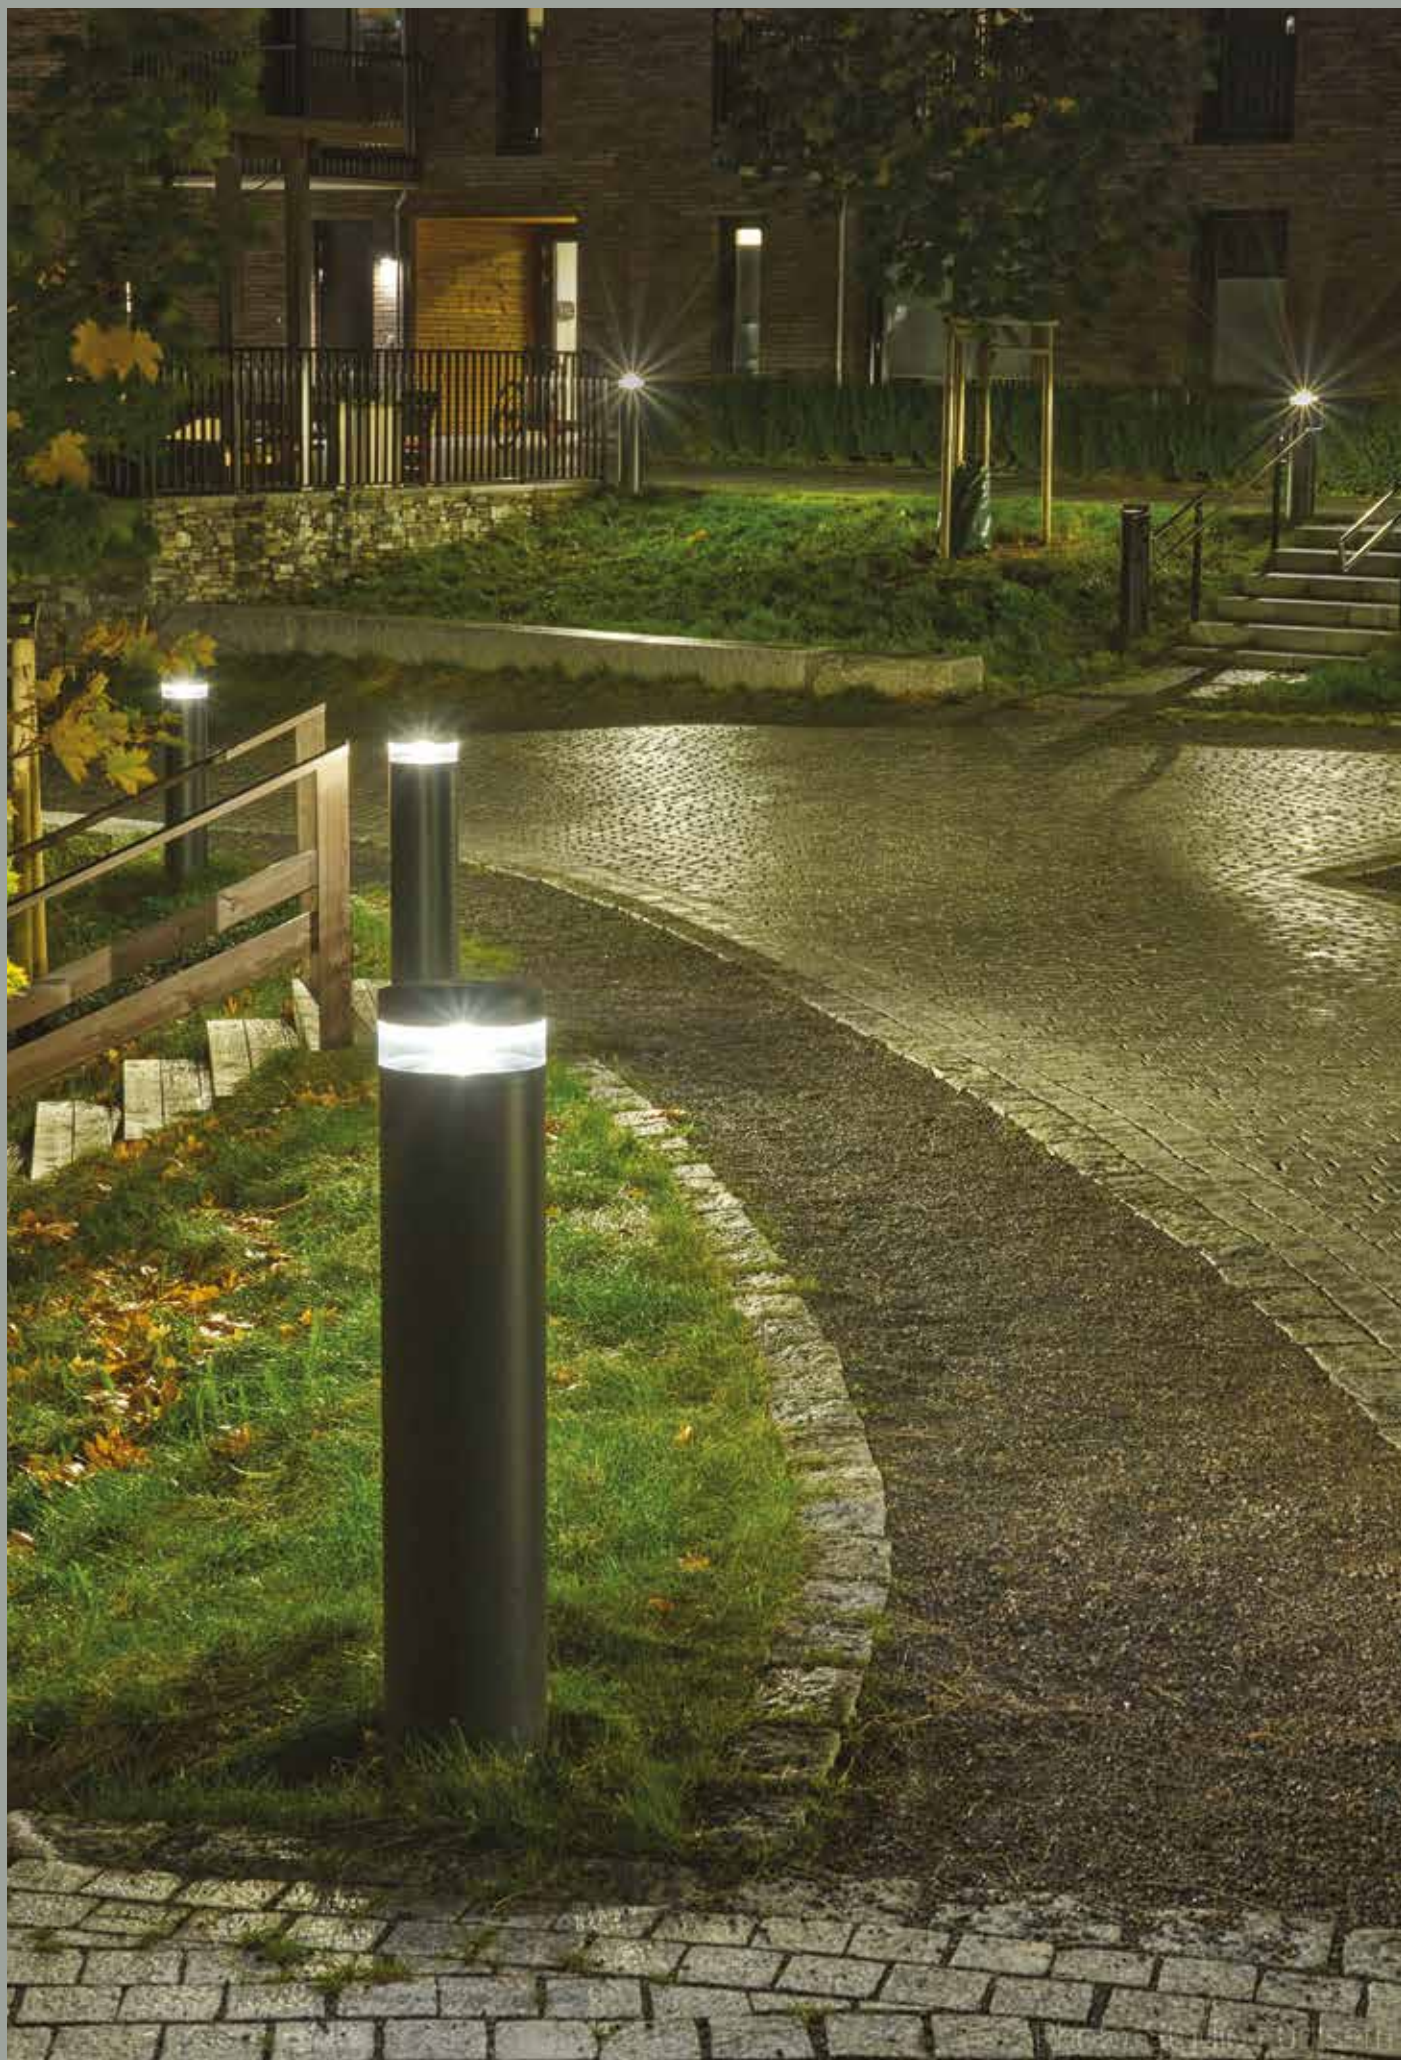

Stavanger



Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 1230

Concreting anchor



Art. 1231

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1240AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1240GR							
5008AL			493lm	4000k	50 000h	DALI2/ NightDim	
5008GR							
5060AL			428lm	3000K	> 145 000h		
5060GR							
5063AL							
5063GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1243AL	E27	-	-	-	-	-	I
1243GR							
2240AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2240GR			565lm	4000K			
2241AL							
2241GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1244AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable
1244GR						
5009AL		11,9W	530lm	4000k	50 000h	
5009GR						
5061AL		12,2W	493lm	3000K	DALI2/ NightDim	
5061GR						
5064AL			428lm	3000K		
5064GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1246AL	E27	-	-	-	-	-	I
1246GR							
2244AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2244GR			565lm	4000K			
2245AL							
2245GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1247AL	LED	8,4W	312lm	3000K	> 145 000h	Dimmable	
1247GR							
5010AL							
5010GR		8,5W	351lm	4000k	50 000h	DALI	
5062AL							
5062GR							
5065AL		8,4W	400lm	3000K	> 145 000h		
5065GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1248AL	E27	-	-	-	-	-	I
1248GR							
2248AL	LED	8,9W	337lm	3000K	> 72 000h	Dimmable	II
2248GR			403lm	4000K			
2249AL							
2249GR							





Voss

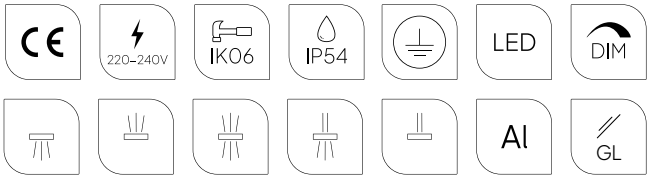

Colour:

 Aluminium

 Graphite

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.





Multiple light variants.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1951AL	LED	10,8W	557lm	3000K	> 171460	Dimmable	
1951GR							
5034AL		16,8W	610lm	4000K	50 000		
5034GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1955AL	LED	10,5W	557lm	3000K	> 102 000h	Dimmable
1955GR						
5036AL		10,5W		4000K	50 000	-
5036GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1950AL	LED	15,4W	614lm	3000K	50 000h	-
1950GR						
5032AL		16,9W	655lm	4000K	> 102 000h	
5032GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1952AL	LED	21W	1115lm	3000K	> 102.000h	-
1952GR			1077lm	4000K		
5033AL						
5033GR						



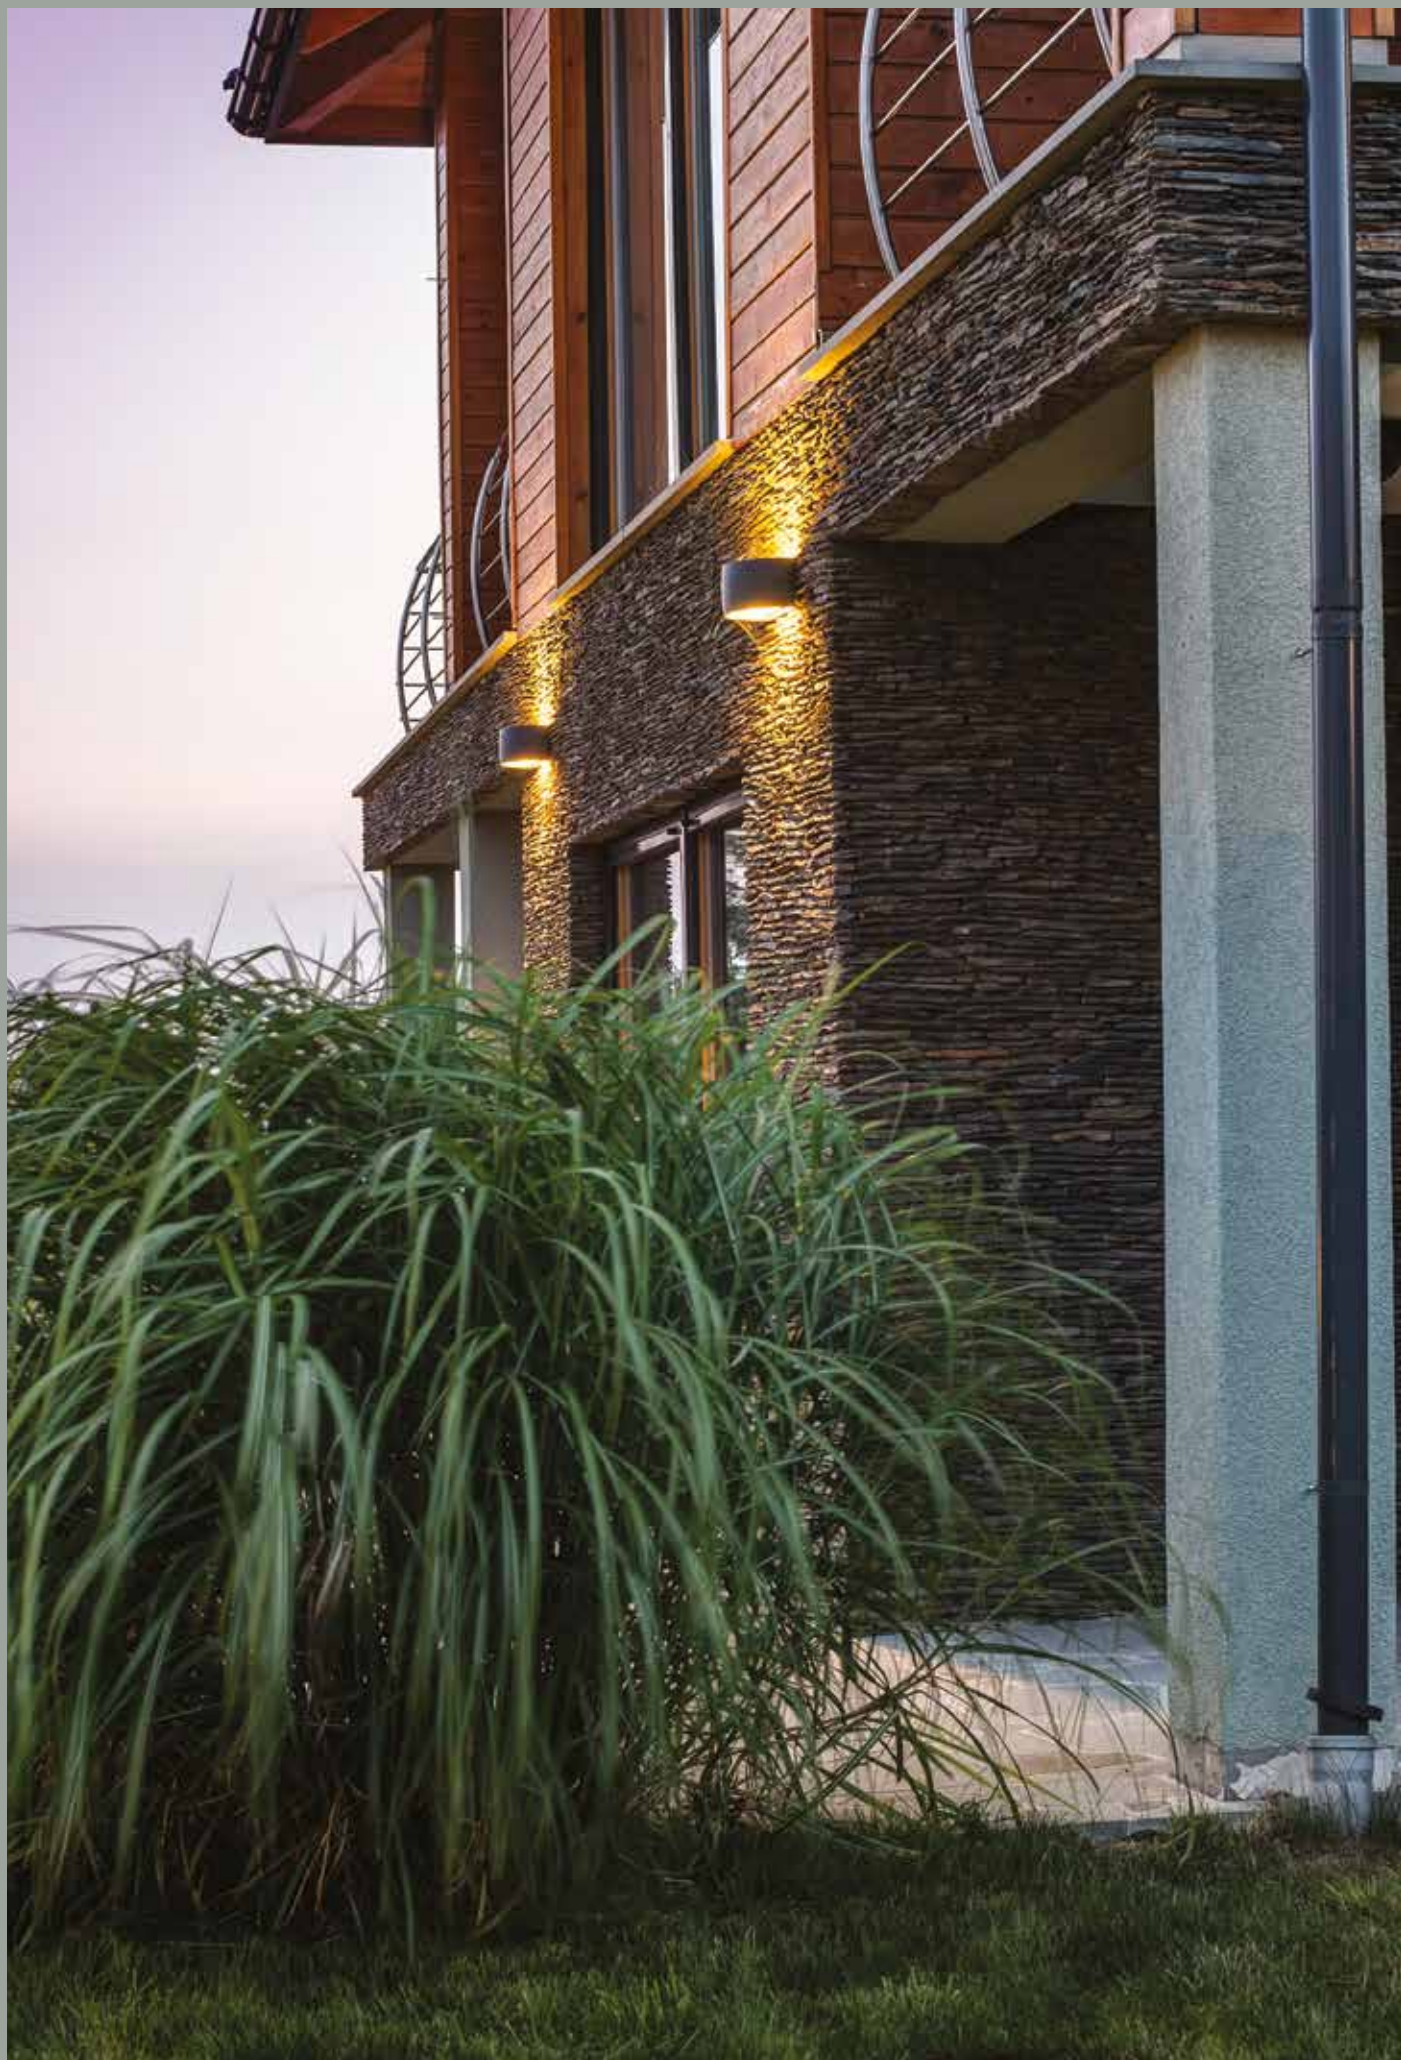

Vasa



Colour:



Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
120AL	E27	-	-	-	-	-
120BL						
120GR						
120WH						
127AL	LED E27	8W	384lm	2700K	25 000h	
127BL						
127GR						
127WH						
128AL	LED	8,5W	631lm	3000K	> 72 000h	Dimmable
128BL						
128GR						
128WH						
5019AL		8,3W	668lm	4000K	> 70 000h	DALI2
5019BL						
5019GR						
5019WH						
5093AL		9,7W	670lm	3000K		
5093BL						
5093GR						
5093WH						
5092AL		14,1W	1039lm	4000K		
5092BL						
5092GR						
5092WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
450AL	LED	6W	440lm	3000K	> 102 000h	Dimmable		
450BL								
450GR								
450WH								
451AL			457lm	4000K				
451BL								
451GR								
451WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
454AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
454BL						
454GR						
454WH						
455AL			457lm	4000K		
455BL						
455GR						
455WH						

Visby

The city needs light of the right quality and in the right quantity. It needs balance.

The Visby model can be an excellent choice here.

Visby is a modernist pole lamp, economical thanks to the LED modules, but also with an excellent ratio of energy consumption to lighting capacity. It is ideal for illuminating streets, built-up areas, parks and squares, where it creates practical yet beautiful lighting. This is complemented by an innovative ring bracket system at the height of the light source and a plane reflection system, which optimally reduces glare and creates a harmonious light beam.





Visby




Colour:

- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:

Luminaires sold separately, recommended poles $\varnothing 60$, further information on pages 417-418.


Art. 7660

Reduction for $\varnothing 60$ luminaires for mounting on the $\varnothing 76$ pole.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
576AL	LED	44,5W	2465lm	3000K	50 000h
576GR					
5002AL		43,6W	2624lm	4000K	
5002GR					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
577AL	LED	27W	1388lm	3000K	50 000h
577GR					
5003AL		26,5W	1553lm	4000K	
5003GR					



Varberg

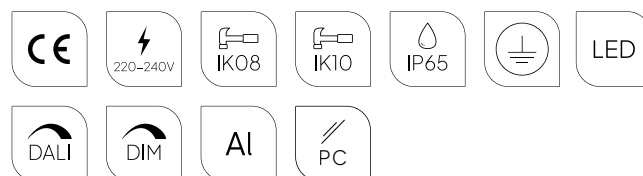


Colour:




Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Multiple light variants.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 6439

Special foot.



Art. 144

Electric box.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
7150AL	LED	30W	3621lm	3000K	>100 000h	DALI2/ NightDim	IESNA type IV			
7150BL										
7150GR										
7151AL			3843lm	4000K						
7151BL										
7151GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
7152AL	LED	7,7W	741lm	3000K	> 109 000h	Dimmable	IESNA type IV
7152BL							
7152GR							
7153AL		7,8W	742lm	3000K		DALI2	
7153BL							
7153GR							
7154AL		7,7W	759lm	4000K		Dimmable	
7154BL							
7154GR							
7155AL		7,8W	760lm	4000K		DALI2	
7155BL							
7155GR							

Torp



Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Art	Type of light source
1396BL	E27



Trysil

Thoroughly futuristic, ahead of its time but elegant. Whatever your needs, Trysil is the perfect choice for those who wish to combine modernity with reliability and exceptional style. Trysil is available in bollard and pole versions. It offers a range of state-of-the-art light sources and controls, adapted to the needs of the most demanding users.

Trysil family means quality, design and functionality.






Trysil



Colour:



Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

Accessories:


Art. 1907

Concreting anchor




Art. 1908

Anchoring support




Art. 1909



Art. 3081

Special foot





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1097AL	LED	7,3W	647lm	4000K	> 171 460h	Dimmable		
1097BL								
1097GR								
1096AL			620lm	3000K	> 102 000h			
1096BL								
1096GR		9,5W	660lm	3000K	50 000h	-		
1108AL								
1108BL								
1108GR								
1109AL			700lm	4000K				
1109BL								
1109GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens							
1101AL	LED	7,4W	694lm	4000K	> 109 000h	Dimmable	IESNA type V							
1101BL														
1101GR														
1100AL			703lm	3000K										
1100BL														
1100GR		8W	689lm	3000K										
1102AL														
1102BL														
1102GR			674lm	4000K										
1103AL														
1103BL		7,4W	706lm	4000K		Dimmable	IESNA type II/III							
1103GR														
1105AL	LED													
1105BL														
1105GR														
1104AL	7,5W	738lm	3000K			DALI2								
1104BL														
1104GR														
1106AL		707lm	4000K											
1106BL														
1106GR	8W	693lm	4000K			DALI2								
1107AL														
1107BL														
1107GR														

Trysil



Colour:

-  Aluminium
-  Black
-  Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Product Eco-friendly.

Accessories:

Art. 3091





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1048AL	LED	12,5W	1260lm	3000K	> 72 000h	Dimmable		
1048BL								
1048GR								
1049AL			1300lm	4000K				
1049BL								
1049GR								
1050AL		20W	1973lm	3000K	>102 000h	DALI2/ NightDim		
1050BL								
1050GR								
1051AL			2054lm	4000K				
1051BL								
1051GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1055AL	LED	8,7W	1141lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1055BL								
1055GR								
1054AL		8,4W	1081lm	3000K				IESNA type II/III
1054BL								
1054GR								
1058AL		8,6W	1111lm	3000K				
1058BL								
1058GR								
1059AL		8,7W	1161lm	4000K				
1059BL								
1059GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1001AL	LED	25W	2476lm	4000K	> 102 000h	Dimmable		
1001BL								
1001GR								
1000AL			2433lm	3000K				
1000BL								
1000GR								
1002AL		40W	3901lm	3000K		DALI2		
1002BL								
1002GR								
1003AL			4145lm	4000K				
1003BL								
1003GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1007AL	LED	16,3W	2377lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1007BL								
1007GR								
1006AL			2282lm	3000K				
1006BL								
1006GR								
1010AL			2216lm	3000K			IESNA type II/III	
1010BL								
1010GR								
1011AL			2293lm	4000K				
1011BL								
1011GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1060AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable		
1060BL								
1060GR								
1061AL			1719lm	4000K				
1061BL								
1061GR								
1062AL		20W	1973lm	3000k		DALI2/ NightDim		
1062BL								
1062GR								
1063AL			2054lm	4000K				
1063BL								
1063GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1012AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable
1012BL						
1012GR						
1013AL		33W	3448lm	4000K		
1013BL						
1013GR						
1014AL		40W	3901lm	3000K		DALI2/ NightDim
1014BL						
1014GR						
1015AL			4145lm	4000K		
1015BL						
1015GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1067AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1067BL								
1067GR								
1066AL			1638lm	3000K				IESNA type II/III
1066BL								
1066GR								
1070AL			1594lm				3000K	
1070BL								
1070GR								
1071AL			1667lm	4000K				
1071BL								
1071GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1019AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1019BL								
1019GR								
1018AL			3277lm	3000K				IESNA type II/III
1018BL								
1018GR								
1022AL			3194lm				3000K	
1022BL								
1022GR								
1023AL			3308lm	4000K				
1023BL								
1023GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1072AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable	
1072BL							
1072GR							
1073AL			1719lm	4000K			
1073BL							
1073GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1024AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable	
1024BL							
1024GR							
1025AL							
1025BL		40W	3448lm	4000K		DALI2/ NightDim	
1025GR							
1026AL							
1026BL							
1026GR							
1027AL							
1027BL							
1027GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1079AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1079BL								
1079GR								
1078AL			1638lm	3000K				IESNA type II/III
1078BL								
1078GR								
1082AL			1594lm				4000K	
1082BL								
1082GR								
1083AL			1667lm	4000K				
1083BL								
1083GR								




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1031AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1031BL								
1031GR								
1030AL			3277lm	3000K			IESNA type II/III	
1030BL								
1030GR								
1034AL			3194lm	4000K				
1034BL								
1034GR								
1035AL			3308lm	4000K				
1035BL								
1035GR								

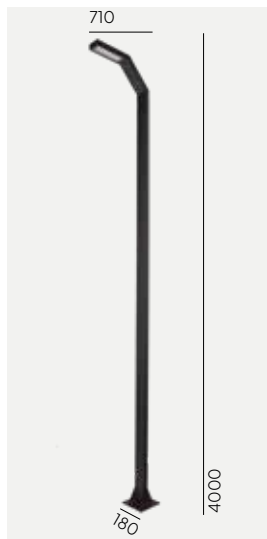


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1084AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable
1084BL				4000K		
1084GR			1719lm	3000K		
1085AL				4000K		
1085BL		20W	1973lm	3000K	> 102 000h	DALI2/ NightDim
1085GR				4000K		
1086AL				3000K		
1086BL				4000K		
1086GR				3000K		
1087AL				4000K		
1087BL				4000K		
1087GR				4000K		

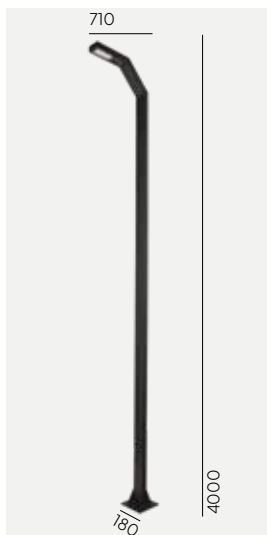

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1091AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1091BL				3000K			
1091GR			1638lm	3000K			
1090AL				4000K			
1090BL			1594lm	3000K			IESNA type II/III
1090GR				4000K			
1094AL			1667lm	3000K			
1094BL				4000K			
1094GR			1667lm	3000K			
1095AL				4000K			
1095BL			1667lm	3000K			
1095GR				4000K			

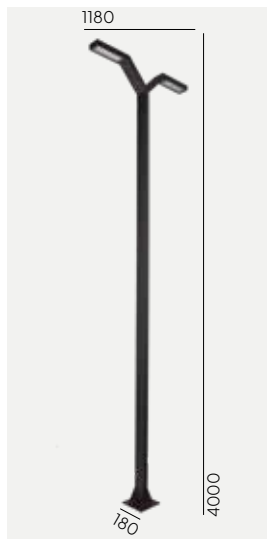

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1037AL	LED	34W	3448lm	4000K	> 102 000h	Dimmable		
1037BL								
1037GR								
1036AL			3347lm	3000K				
1036BL								
1036GR								
1038AL		40W	3901lm			DALI2		
1038BL								
1038GR								
1039AL			4145lm	4000K				
1039BL								
1039GR								

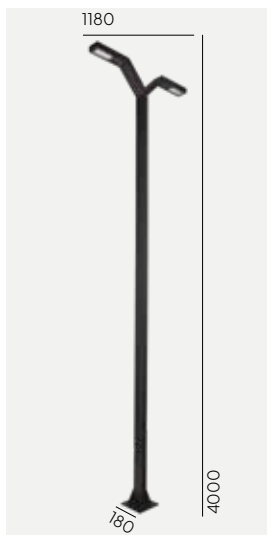

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1043AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V			
1043BL										
1043GR										
1042AL			3277lm	3000K						
1042BL										
1042GR										
1046AL			3194lm				IESNA type II/III			
1046BL										
1046GR										
1047AL			3308lm	4000K						
1047BL										
1047GR										



Bergen



Colour:




Black



Galvanized



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising + powder coating).

Accessories:


Art. 153

Corner bracket



Art. 159

Spacer





Art	Type of light source
270BL	E27
270GA	



Art	Type of light source
271BL	E27
271GA	



Bergen

**Colour:**


Black



Galvanized



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
611BL	E27	-	-	-	-	-	
611WH							
615BL	LED E27	LED max 9W	240lm	2700K	25 000h	Dimmable	
615WH							
617BL	LED	8W	185lm	3000K	50 000h		
617WH							
618BL		10W	-				
618WH							

Berlin



Colour:

☒ Black

☐ White

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.




Art	Type of light source
610BL	E27
610WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
631BL	E27	-	-	-	-	-			
631GA									
637BL	LED	8W	364lm	3000K	50 000h	Dimmable			
637GA									
638BL		10W	532lm						
638GA									

Bremen



Colour:

- ☒ Black ☐ Galvanized

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
630BL	E27
630GA	

270



Photo: Studio Fulgseth

Lofoten



Colour:

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1940BL	E27



Art	Type of light source
1960BL	E27

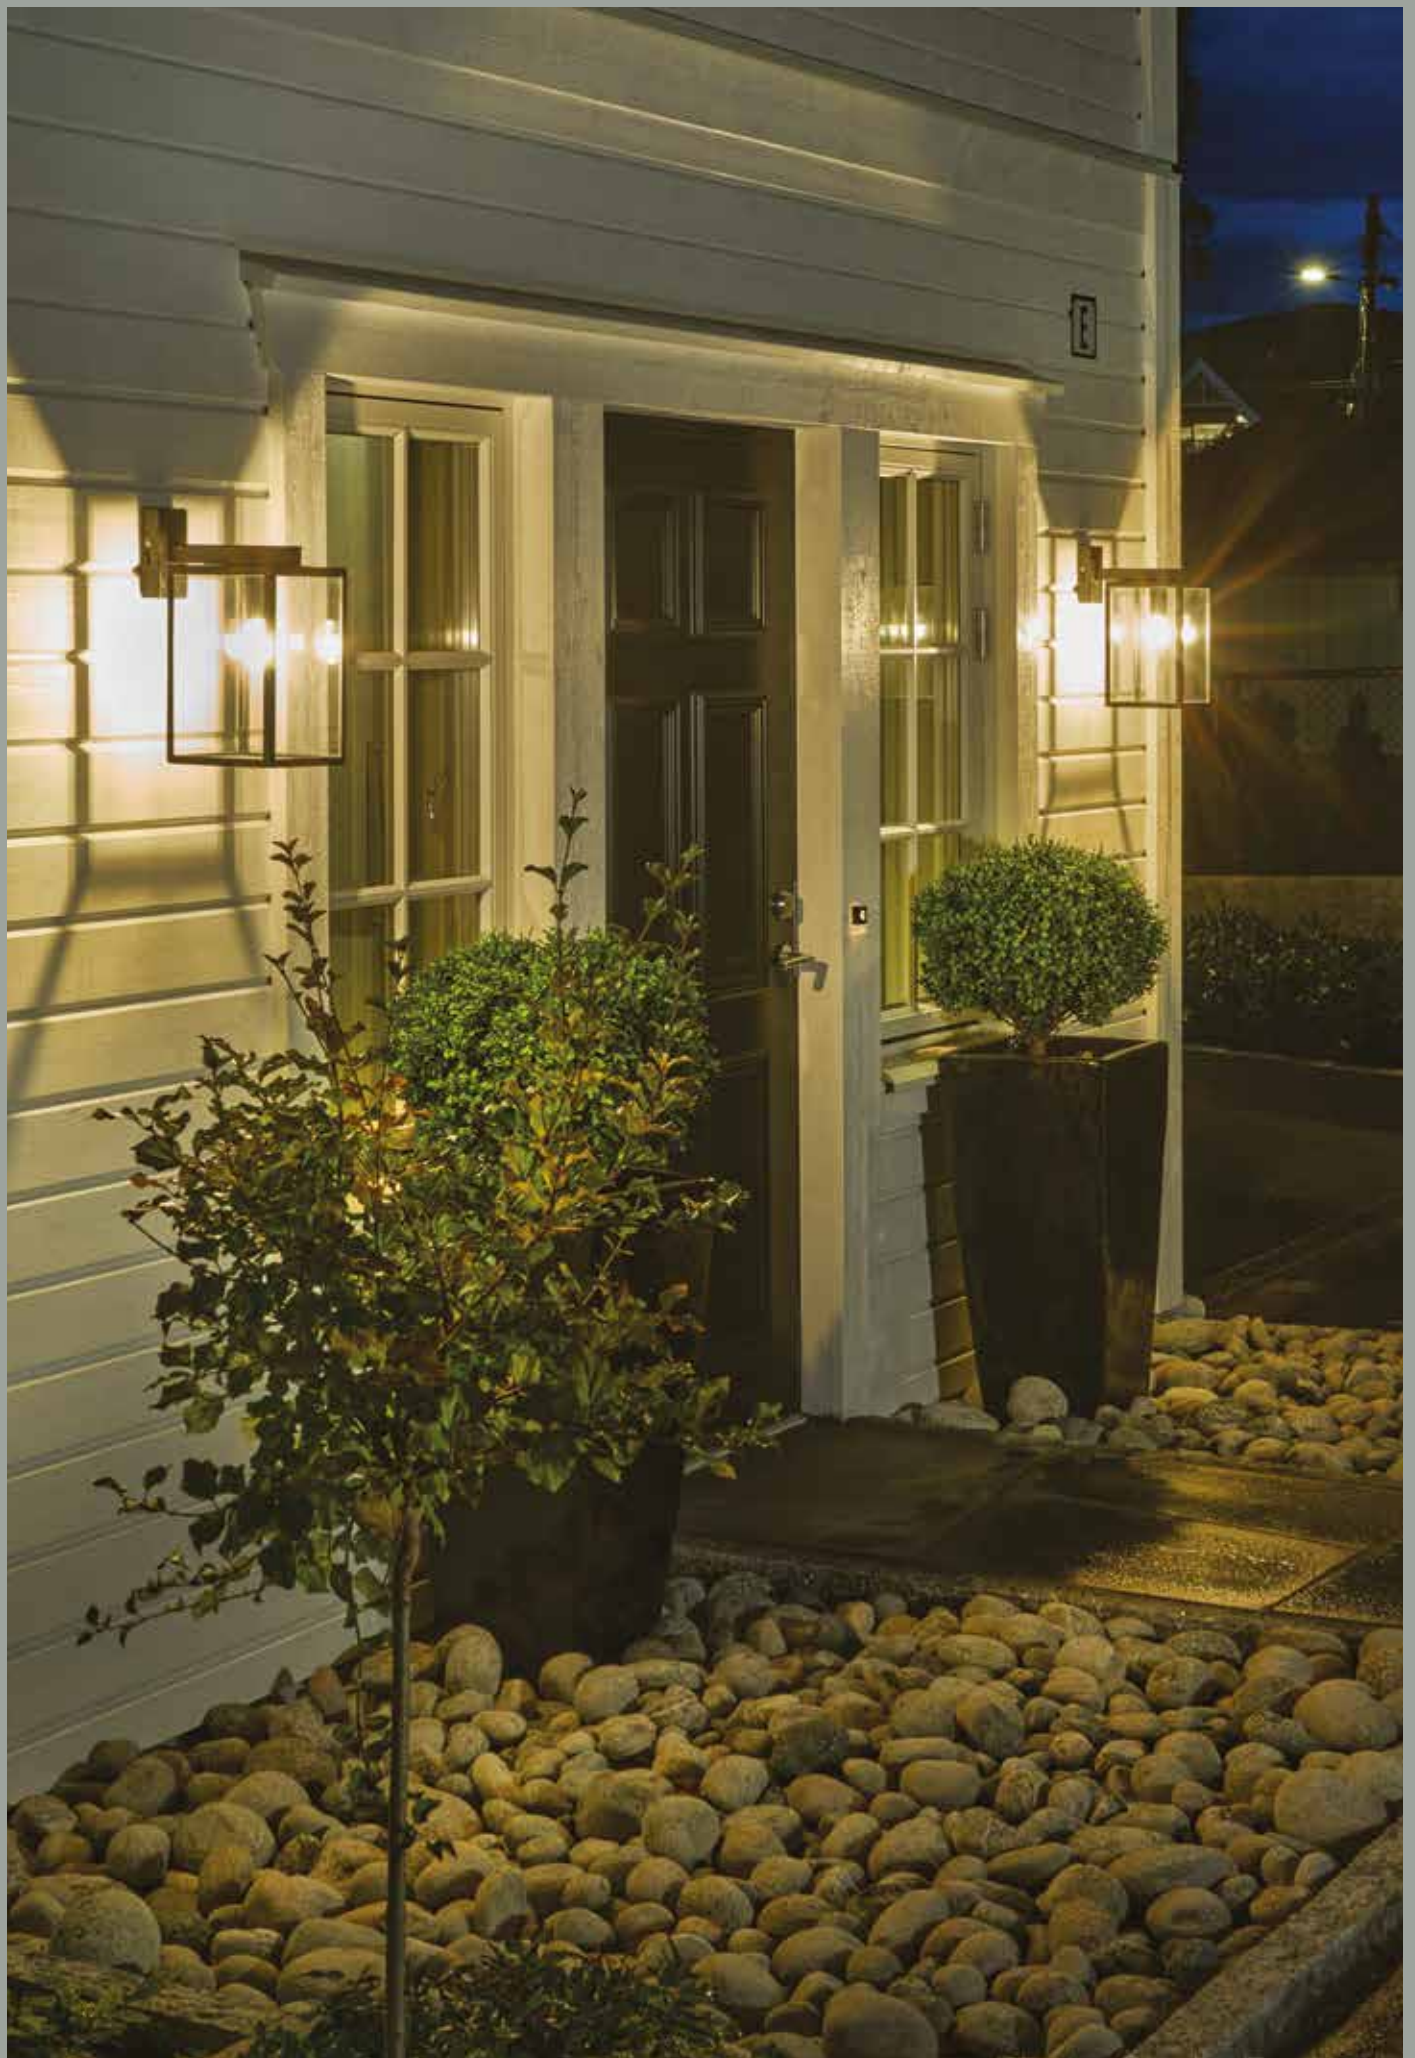

Lofoten

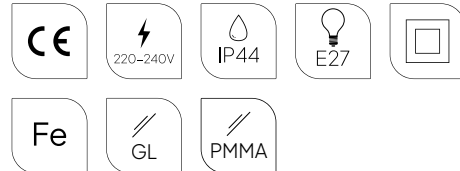

Colour:

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:

Art. 155

Corner bracket





Art	Type of light source
1939BL	E27



Art	Type of light source
1949BL	E27



Art	Type of light source
1963BL	E27



Art	Type of light source
1969BL	E27



Lofoten



Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art
1944BL | Type of light source
E27



Art
1945BL | Type of light source
E27

Lofoten

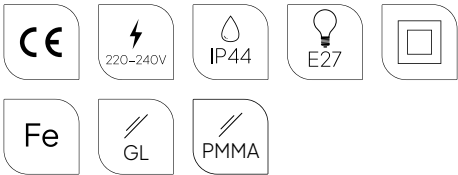

Colour:

● Black



Luminaire suitable for extreme conditions.




Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art
1942BL | Type of light source
E27



Art
1962BL | Type of light source
E27



Lofoten

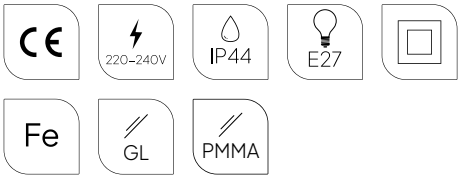

Colour:

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1941BL	E27



Art	Type of light source
1961BL	E27



Lofoten

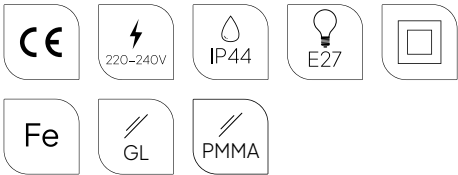

Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1946BL	E27



Art	Type of light source
1966BL	E27



Art	Type of light source
1948BL	E27



Art	Type of light source
1947BL	E27



Art	Type of light source
1968BL	E27

Lofoten



Colour:

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising + powder coating).

Accessories:


Art. 405


Concreting anchor



Art. 406

Ground anchor






Art	Type of light source
690BL	E27
690GA	



Larvik

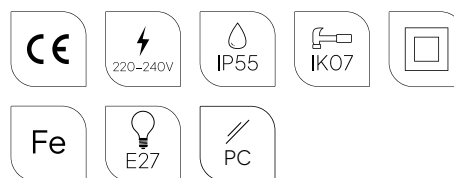

Colour:



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Mounting corner



Art. 159


Luminaire mounting distance





Art	Type of light source
240BL	E27
240GA	

Oslo

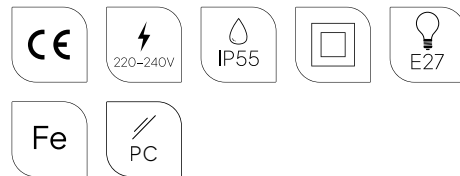

Colour:



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Mounting corner




Art. 159

Luminaire mounting distance





Oslo

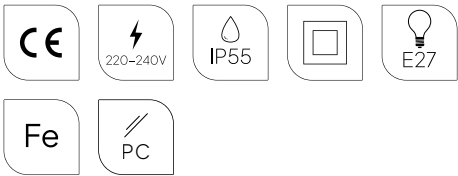

Colour:

 Black

 Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).



Art	Type of light source
245BL	E27
245GA	



Oslo



Colour:

-  Black
-  Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 405

Concreting anchor.



Art. 406

Ground anchor.






Art	Type of light source
242BL	E27
242GA	



Oslo

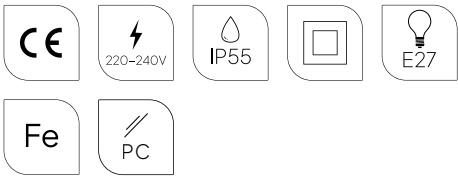

Colour:

● Black


● Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
240A/BL	E27
240A/GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
220BL	E27	-	-	-	-	-	
220GA							
1600BL	LED	8W	240lm	3000K	50 000h	Dimmable	
1600GA							
5110BL		8W	250lm	4000K			
5110GA							

Stockholm



Colour:

- Black
- Galvanized

Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).



Art	Type of light source
226BL	E27
226GA	



Stockholm & Stockholm Big

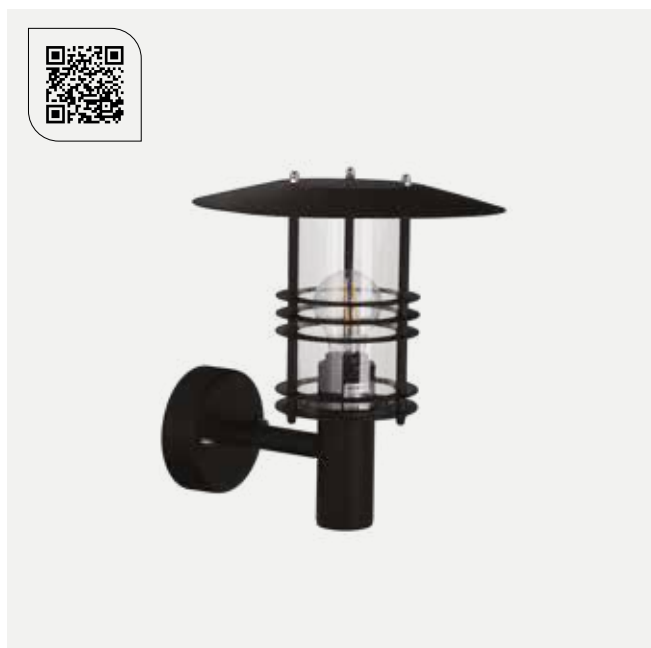

Colour:

● Black


● Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Corner bracket



Art. 159

Spacer



- 

IP54
- 
- 

E27
- 

PMMA
- 

Fe



Art	Type of light source
286BL	E27
286GA	


- 

IP54
- 
- 

E27
- 

PMMA
- 

Fe



Art	Type of light source
280BL	E27
280GA	







Stockholm



Colour:



Black



Galvanized

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor.



Art. 206

Anchoring support.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
288BL	E27	-	-	-	-	-		
288GA								
1464BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable		
1464GA								
1265BL	LED	8,5W	342lm	3000K	50 000h			
1265GA								
1604BL		10,5W	432lm	3000K	>50 000h			
1604GA								
1605BL			453lm	4000K				
1605GA								



Art	Type of light source
297BL	E27
297GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
289BL	E27	-	-	-	-	-
289GA						
1469BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable
1469GA						
1260BL	LED	8,5W	342lm	3000K	> 50 000h	
1260GA						
1606BL			362lm	4000K		
1606GA						
1603BL		453lm				3000K
1603GA						
1602BL	10,5W		432lm	3000K		
1602GA						



Art	Type of light source
298BL	E27
298GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
299BL	E27	-	-	-	-	-	II
299GA							
1269BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable	
1269GA							
1268BL	LED	10W	333lm	3000K	50 000h		I
1268GA							





Stockholm

scandinavian wood



Colour:

-  Black
-  Galvanized

Wood:

-  Impregnated
-  Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor.



Art. 206

Anchoring support.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1423BL	E27	-	-	-	-	-
1423GA						
1426BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1426GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1433BL	E27	-	-	-	-	-
1433GA						
1436BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1436GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1420BL	E27	-	-	-	-	-
1420GA						
1429BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1429GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1430BL	E27	-	-	-	-	-
1430GA						
1439BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1439GA						





Stockholm & Stockholm Big



Colour:

● Black

● Galvanized



Luminaire suitable for extreme conditions.




Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).




Art	Type of light source
284BL	E27
284GA	



Art	Type of light source
285BL	E27
285GA	




Art	Type of light source
287BL	E27
287GA	

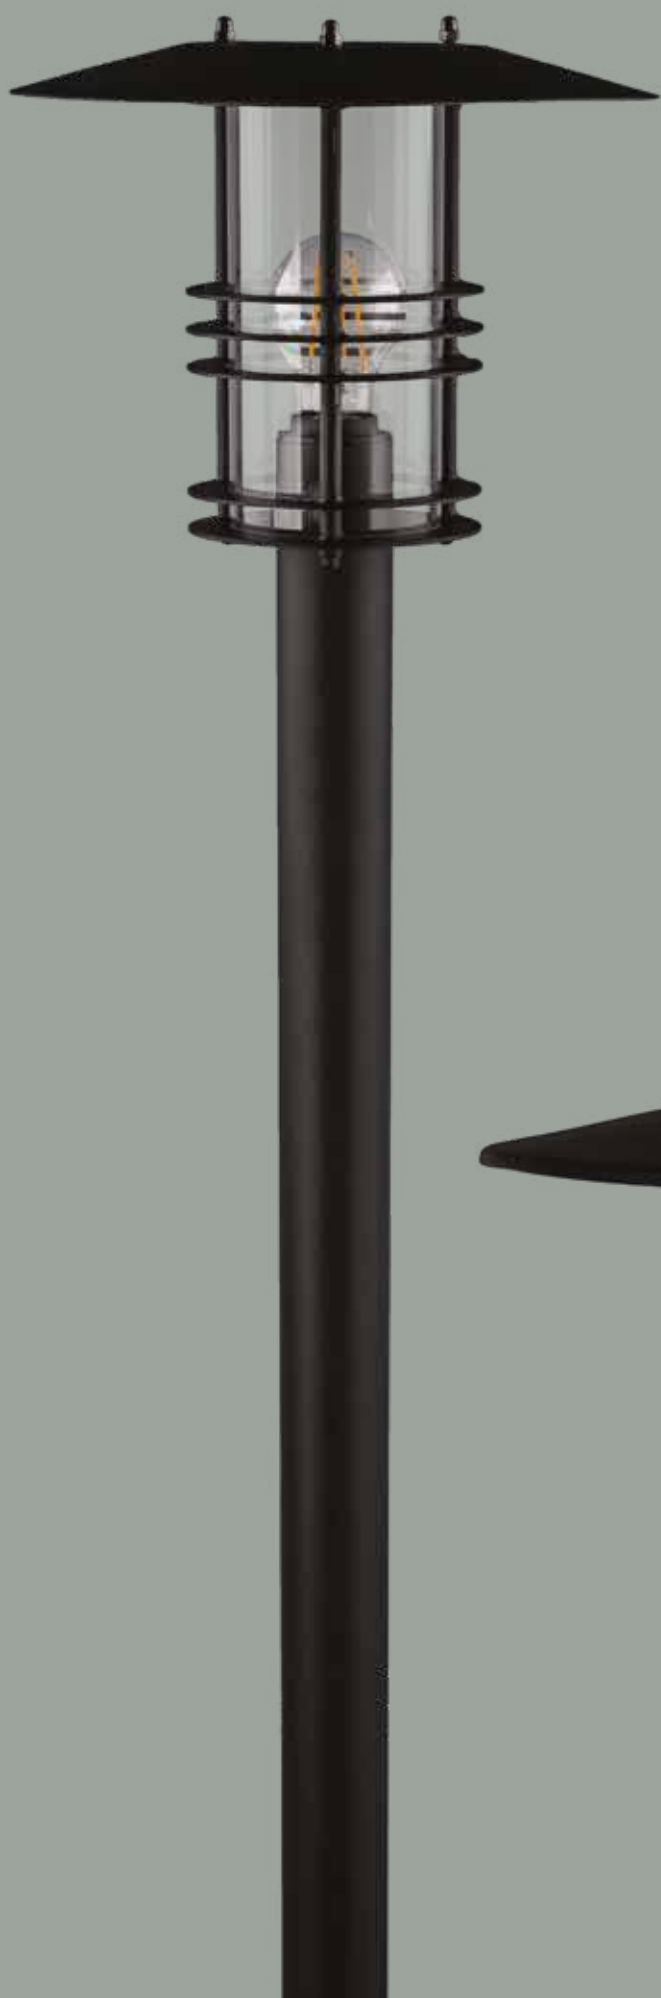



Stockholm Big



Colour:

-  Black
-  Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 405

Concreting anchor.



Art. 406

Ground anchor.





Art	Type of light source
281BL	E27
281GA	




Art	Type of light source
283BL	E27
283GA	





Arvika

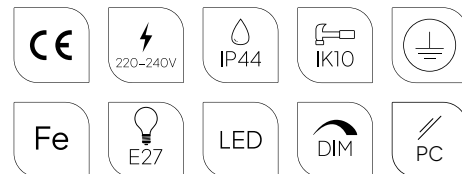

Colour:

● Black

● Galvanized

Colour temperature:

2700K* 3000K

4000K




*2700K on request only, contact your supplier.



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 208


Concreting anchor.



Art. 207

.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
898BL	E27	-	-	-	-
898GA					
891BL	LED	8,8W	543lm	3000K	> 102 000h
891GA					




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Energy distributor ~230V
899BL	E27	-	-	-	-	F(SHUKO)
899GA						
893BL	LED	8,8W	543lm	3000K	> 102 000h	
893GA						
901BL					> 72 000h	E(UNI)
901GA						
902BL						
902GA						
		12,7W	568lm	4000K		





Basel

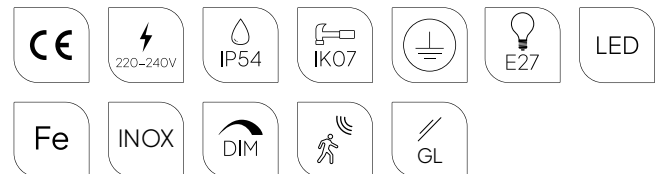

Colour:



Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
660AL	E27
660BL	
660GA	
660ST	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
661AL	E27	-	-	-	-	-
661BL						
661GA						
661ST						
MD661AL						Motion Detector
MD661BL						
MD661GA						
MD661ST						
668AL	LED	5,2W	483lm	3000K	> 70 000	Dimmable
668BL						
668GA						
668ST						
671AL		9,5W	-	4000K	50 000h	Motion Detector
671BL						
671GA						
671ST						
672AL			-			
672BL						
672GA						
672ST						





Bern



Colour:

- Black
- Galvanized
- Aluminium
- Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
650AL	E27
650BL	
650GA	
650ST	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
651AL	E27	-	-	-	-	-			
651BL									
651GA									
651ST									
655AL	LED	5,2W	477lm	3000K	> 72 000	Dimmable			
655BL									
655GA									
655ST									
675AL		11,2W	819lm	4000K	50 000h	Motion Detector			
675BL									
675GA									
675ST									
676AL			878lm						
676BL									
676GA									
676ST									





Boden

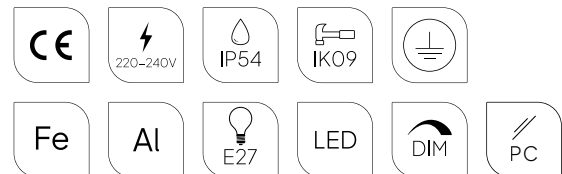

Colour:

● Black

● Galvanized

Colour temperature:

2700K* 3000K

4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
862BL	E27
862GA	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
860BL	E27	-	-	-	-	-
860GA						
866BL	LED	8W	307lm	3000K	50 000h	Dimmable
866GA				4000K		
5109BL			-			
5109GA						








Karlstad



Colour:



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 153

Mounting corner



Art. 159

Luminaire mounting distance






Art	Type of light source
230BL	E27
230CO	
230GA	
230WH	



Art	Type of light source
230A/BL	E27
230A/GA	
230A/WH	



Karlstad

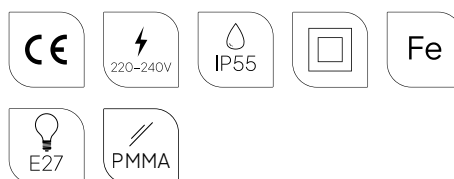**Colour:**

● Black

● Galvanized


○ White




Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

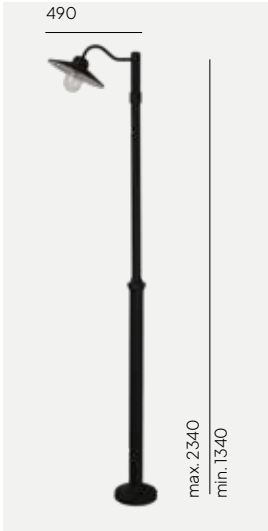


Art	Type of light source
2033BL	E27
2033GA	



Art	Type of light source
2032BL	E27
2032GA	

Karlstad



Colour:


- Black
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 405


Concreting anchor.



Art. 406

Ground anchor.





Art	Type of light source
290BL	E27
290GA	

Lund



Colour:



Black




Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 153

Mounting corner



Art. 159

Luminaire mounting distance





Lund



Colour:


-  Black
-  Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 405

Concreting anchor.



Art. 406

Ground anchor.





Mandal

An intriguing as well as functional and durable wall fixture. Scandinavian style is not only about design, but also about usability. Materials used to construct Mandal are robust and easy to maintain. Harmonious beam of light through the glass panes. It is a truly versatile luminaire that meets lighting requirements of contemporary architecture. Minimalism can be the perfect solution for any space, adding sophistication and unique character. Mandal harmonises perfectly with any type of building, but particularly in the galvanised version matches perfectly modern or industrial style.





Mandal



Colour:

● Black

● Galvanized

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 130

Corner bracket
Art.1373, 1374



Art. 149

Corner bracket
Art.1370, 1371





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1370BL	LED GU10	7,8W	500lm	2700K	40 000h	Dimmable
1370GA						
1371BL	LED GU10	-	-	-	-	-
1371GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1373BL	LED GU10	3,9W	250lm	2700K	40 000h	Dimmable
1373GA						
1374BL	LED GU10	-	-	-	-	-
1374GA						





Paris

Fashionable and elegant as a Parisian – a wall fixture that combines minimalist, industrial design and excellent functionality. Ideal for illuminating buildings and fence posts. Paris is also perfect for illuminating a house number plate. Four colour options allow for perfect match with any surroundings, both copper and galvanised versions will add exceptional character to any façade.





Paris

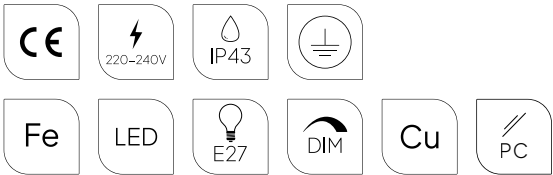

Colour:

- Black
- Copper
- Galvanized
- White

Colour temperature:


- 2700K* 3000K 4000K
- *2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
160BL	E27	-	-	-	-	-		
160CO								
160GA								
160WH								
1495BL	LED	5,2W	508lm	3000K	> 70 000h	Dimmable		
1495GA								
1495WH								
5038BL		5,4W	476lm	4000K				
5038GA								
5038WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
163BL	E27	-	-	-	-	-
163GA						
163WH						
1496BL	LED	5,2W	471lm	3000K	> 70 000h	Dimmable
1496GA						
1496WH						
5039BL		5,4W	438lm	4000K		
5039GA						
5039WH						



Paris Big

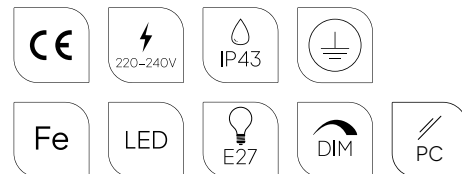**Colour:**

Black



White



Galvanized

Colour temperature:

2700K* 3000K

4000K




*2700K on request only, contact your supplier.




Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1392BL	LED	5,2W	346lm	3000K	> 70 000h	Dimmable
1392GA						
5113BL		5,4W	432lm	4000K		
5113GA						

Ski

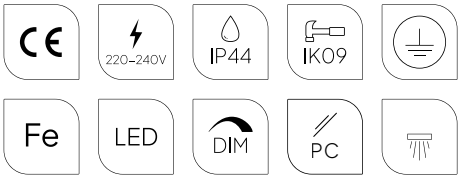

Colour:

- Black
- Galvanized

Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.




Luminaires with energy distributor
option.adjustmen



Luminaire suitable for extreme
conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Energy distributor ~230V
1390BL 1390GA	LED	5,2W	371lm	3000K	> 70 000h	Dimmable	F(SCHUKO)



Vansbro




Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 153

Mounting corner.



Art. 159

Luminaire mounting distance.





Art	Type of light source
1920BL	E27
1920CO	
1920GA	



Chelsea

Chelsea is craftsmanship, perfect workmanship and hand-blended polished copper, the result is a distinguished lighting charm. The exclusive Chelsea family offers traditional design and exceptional aesthetics. All the luminaires in the wide range are ideal for lighting entrances, terraces, walkways, driveways, gardens, fence posts. The unique style of these lamps will satisfy even the most demanding customers. An important feature of Chelsea to bear in mind that in natural weather conditions the bodies are covered with a noble patina.





Chelsea



Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Handmade product (artisanal method).



IP44






E27

Cu



PC



Art	Type of light source
950CO	E27



IP44





E27

Cu



PC



Art	Type of light source
962CO	E27



IP44





E27

Cu



PC



Art	Type of light source
963CO	E27





Chelsea & Chelsea Big



Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

Accessories:

Art. 152

Mounting corner.
For Art. 954, Art. 960




IP44




E27

Cu


PC



Art	Type of light source
955CO	E27



IP44




E27

Cu


PC



Art	Type of light source
964CO	E27



IP44




E27

Cu


PC



Art	Type of light source
954CO	E27


IP44




E27

Cu


PC



Art	Type of light source
960CO	E27





Chelsea & Chelsea Big

**Colour:**


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Handmade product (artisanal method).

Accessories:**Art. 307**

Concreting anchor.





Art	Type of light source
941CO	E27



Art	Type of light source
957CO	E27




Art	Type of light source
940CO	E27



Art	Type of light source
956CO	E27

Chelsea

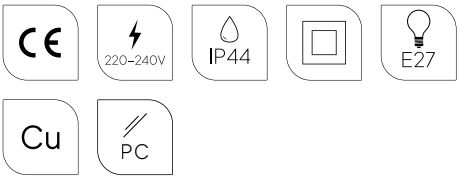

Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Handmade product (artisanal method).



Art	Type of light source
961CO	E27


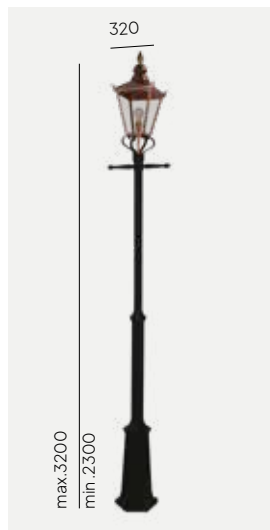


Art	Type of light source
951CO	E27



Art	Type of light source
953CO	E27

Chelsea

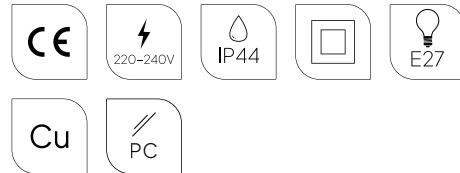

Colour:




Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

Accessories:


Art. 305

Concreting anchor.




Art. 306

Ground anchor.




Art. 108

Anchoring support.






Art	Type of light source
310BL	E27
310WH	



Art	Type of light source
311BL	E27
311WH	




Art	Type of light source
360BL	E27
360WH	



Art	Type of light source
361BL	E27
361WH	

Bologna

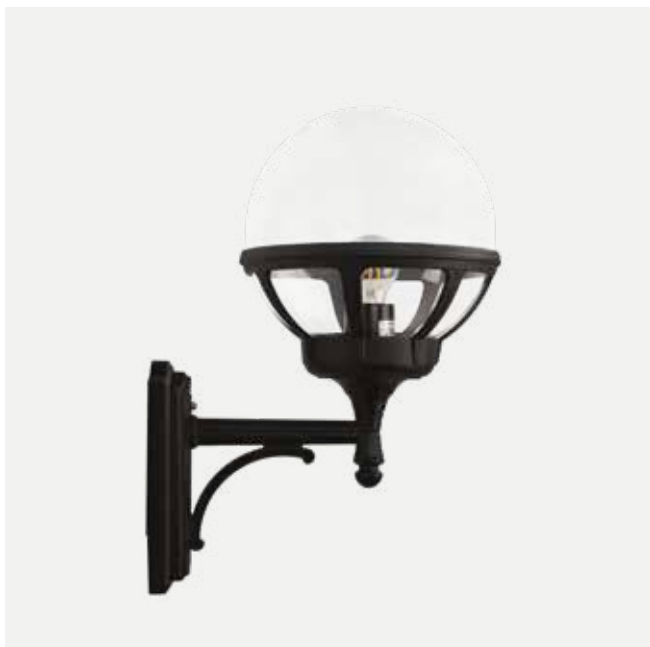**Colour:**

Black




White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.


Accessories:**Art. 152**

Mounting corner





Bologna

**Colour:**

Black




White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.


Accessories:**Art. 307**

Mounting corner





Art	Type of light source
312BL	E27
312WH	



Art	Type of light source
313BL	E27
313WH	



Art	Type of light source
314BL	E27
314WH	





Art	Type of light source
315BL	E27
315WH	





Bologna



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.





Art	Type of light source
362BL	E27
362WH	



Art	Type of light source
363BL	E27
363WH	



Art	Type of light source
364BL	E27
364WH	




Art	Type of light source
365BL	E27
365WH	





Art	Type of light source
370BL	E27
370WH	

Como

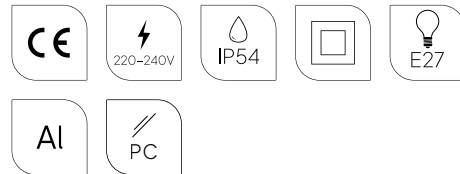**Colour:**

 Black


 White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

Accessories:**Art. 152**

Mounting corner.





IP54





E27



PC




Al



Art	Type of light source
375BL	E27
375WH	



Como

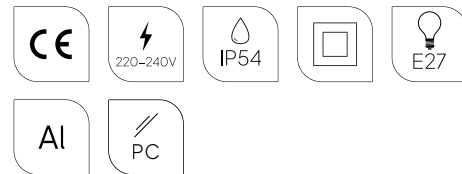**Colour:**

Black




White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Accessories:**Art. 307**

Concreting anchor.





Como




Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.



Como

IP54

E27

PC

Al




Art	Type of light source
371BL	E27
371WH	

IP54

E27

PC

Al

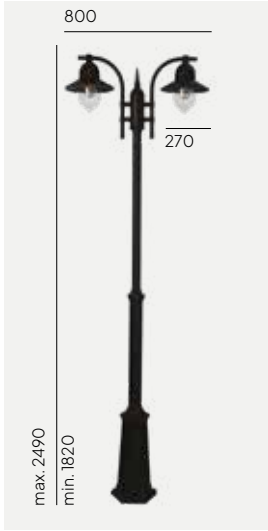

Art	Type of light source
372BL	E27
372WH	

IP54

E27


PC

Al



Art	Type of light source
373BL	E27
373WH	

Florence

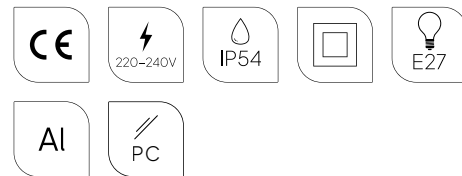**Colour:**

Black




White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

Accessories:**Art. 152**

Mounting corner.






Art	Type of light source
800BL	E27
800WH	



Florence

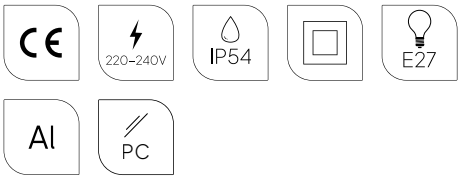

Colour:

☒ Black


☐ White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
800A/BL	E27
800A/WH	



Art	Type of light source
805BL	E27
805WH	

Florence

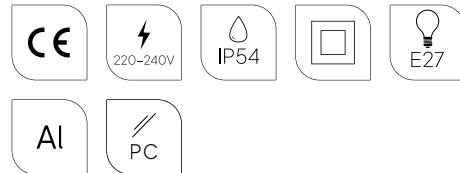**Colour:**

Black




White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

Accessories:**Art. 307**

Concreting anchor.





IP54






E27



PC

Al

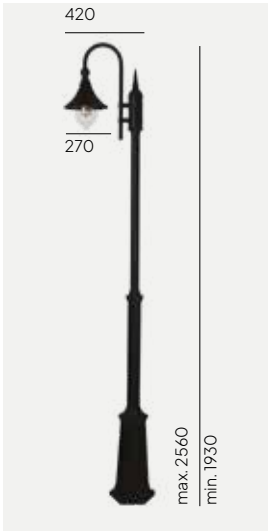

Art	Type of light source
810BL	E27
810WH	



IP54






E27



PC

Al

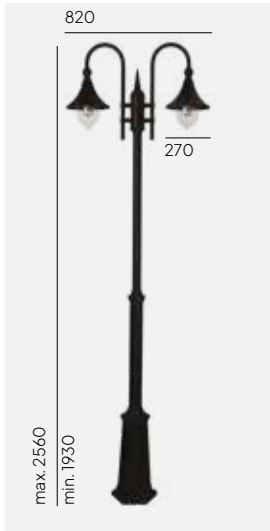

Art	Type of light source
820BL	E27
820WH	



IP54






E27




PC

Al

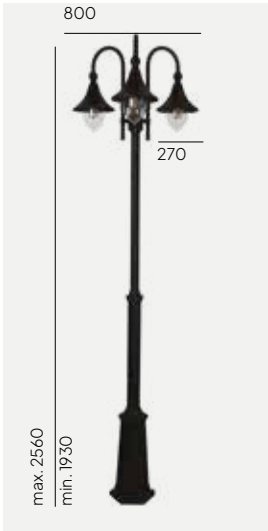

Art	Type of light source
830BL	E27
830WH	

Florence



Colour:


-  Black
-  White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.






Genoa & Genoa Mini



Colour:

● Black


○ White

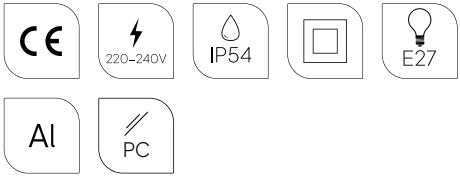



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

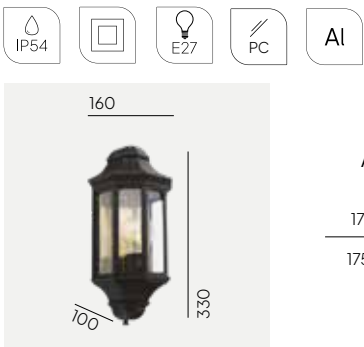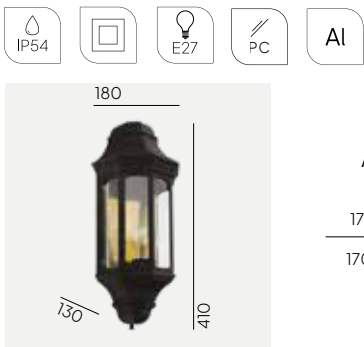



Glasgow

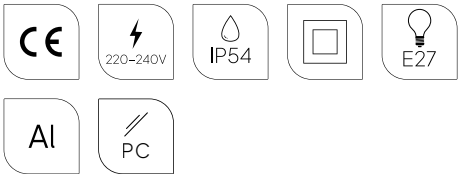

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source
730BL	E27
730WH	



London

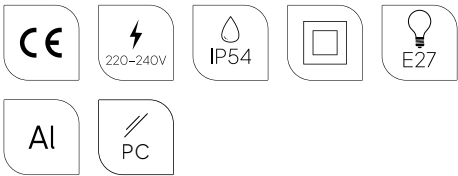

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
497BL	E27
497WH	



London Big

**Colour:**

● Black


○ White

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.

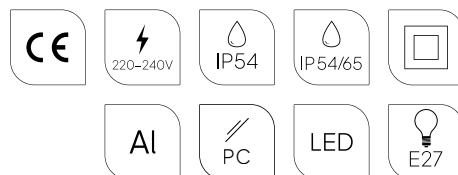

Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

Accessories:**Art. 152**

Mounting corner.







Art	Type of light source
490BL	E27
490WH	



Art	Type of light source
493BL	E27
493WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4116BL	LED	9,5W	757lm	3000K	50 000h
4116WH				4000K	
4117BL			805lm	3000K	
4117WH				4000K	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4118BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4118WH				4000K		
4119BL			1767lm	3000K		
4119WH				4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4136BL	LED	9,5W	757lm	3000K	50 000h
4136WH				4000K	
4137BL			805lm	3000K	
4137WH				4000K	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4138BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4138WH				4000K		
4139BL			1767lm	3000K		
4139WH				4000K		



Art	Type of light source
480BL	E27
480WH	



Art	Type of light source
481BL	E27
481WH	

London



Colour:

☒ Black

☐ White

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 152

Mounting corner.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4140BL	LED	17,5W	1392lm	3000K	50 000h	-
4140WH				4000K		
4141BL				4000K		
4141WH				4000K		
4142BL		14,6W	1716lm	30000K		IESNA type V
4142WH						

London & London Big



Colour:


- ☒ Black
- ☐ White

Colour temperature:

2700K* 3000K 4000K

☐ ☒ ☐


*2700K on request only, contact your supplier.

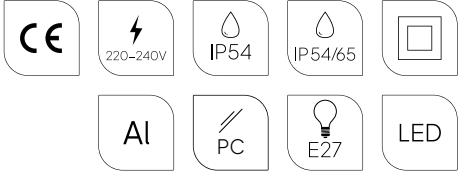

Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
481A/BL	E27
481A/WH	



Art	Type of light source
493A/BL	E27
493A/WH	



London & London Big



Colour:


- ☒ Black
- ☐ White

Colour temperature:

2700K* 3000K 4000K

☐ ☒ ☐


*2700K on request only, contact your supplier.

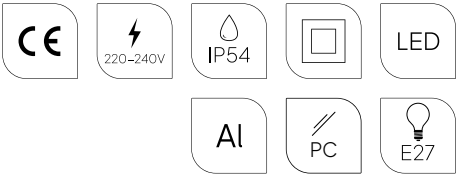

Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
484BL	E27
484WH	



Art	Type of light source
485BL	E27
485WH	



Art	Type of light source
494BL	E27
494WH	





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4144BL	LED	9,3W	756lm	3000K	50 000h
4144WH					





London & London Big



Colour:

● Black

○ White

Colour temperature:

2700K* 3000K

4000K

○ ○ ○


*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.





Art	Type of light source
482BL	E27
482WH	



Art	Type of light source
483BL	E27
483WH	



Art	Type of light source
491BL	E27
491WH	



Art	Type of light source
492BL	E27
492WH	



Art	Type of light source
495BL	E27
495WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4124BL	LED	17,5W	1392lm	3000K	50 000h
4124WH				4000K	
4125BL					
4125WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4128BL	LED	19W	1514lm	3000K	50 000h
4128WH			1514lm	4000K	
4129BL				4000K	
4129WH			1514lm	4000K	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4132BL	LED	28,5W	2271lm	3000K	50 000h
4132WH			2271lm	4000K	
4133BL				4000K	
4133WH			2271lm	4000K	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens	
4126BL	LED	14,6W	1716lm	3000K	> 120 000h	IESNA type V	
4126WH							
4127BL			1767lm	4000K			
4127WH							





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4130BL	LED	29,2W	3422lm	3000K	> 120 000h	IESNA type V
4130WH						
4131BL			3534lm	4000K		
4131WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens	
4134BL	LED	43,8W	5148lm	3000K	> 120 000h	IESNA type V	
4134WH							
4135BL			5301lm	4000K			
4135WH							

Latina



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
105BL	E27
105WH	




Modena & Modena Big

**Colour:**

● Black


○ White

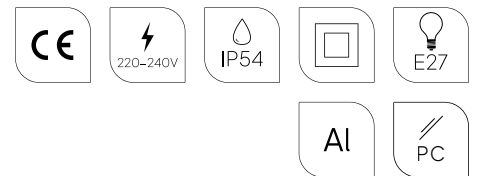

Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

Accessories:**Art. 152**

Corner bracket





Art	Type of light source
350BL	E27
350WH	



Art	Type of light source
351BL	E27
351WH	



Art	Type of light source
380BL	E27
380WH	



Art	Type of light source
381BL	E27
381WH	


Modena & Modena Big



Colour:

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
351A/BL	E27
351A/WH	



Art	Type of light source
381A/BL	E27
381A/WH	



Modena & Modena Big

**Colour:**

● Black


○ White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.


Accessories:**Art. 307**

Concreting anchor.





Art	Type of light source
304BL	E27
304WH	



Art	Type of light source
300BL	E27
300WH	




Art	Type of light source
384BL	E27
384WH	





Modena



Colour:


- ☒ Black
- ☐ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 305

Concreting anchor.




Art. 306

Ground anchor.



Art. 108

Anchoring support.







Art	Type of light source
302 BL	E27
302 WH	



Art	Type of light source
303 BL	E27
303 WH	

Modena Big




Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 305

Concreting anchor.




Art. 306


Ground anchor.



Art. 108

Anchoring support.



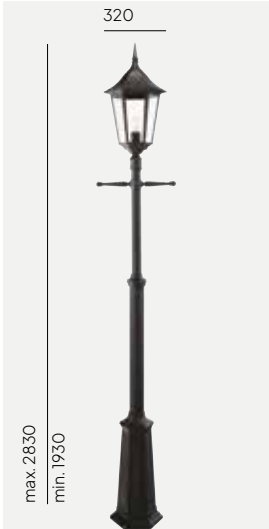

Art	Type of light source
301BL	E27
301WH	




Art	Type of light source
382BL	E27
382WH	



Art	Type of light source
397BL	E27
397WH	

Venice

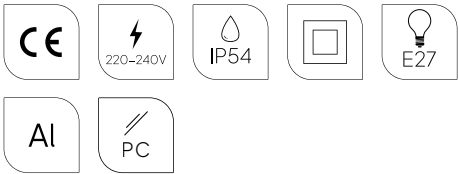

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
261BL	E27
261WH	




Rimini



Colour:

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
250BL	E27
250WH	



Art	Type of light source
404BL	E27
404WH	




Art	Type of light source
259BL	E27
259WH	



Art	Type of light source
259IBL	E27
259IWH	

Rimini

**Colour:**

● Black


○ White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Accessories:**Art. 150**

Corner bracket





Rimini & Milano



Colour:

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 405

Concreting anchor.




Art. 406

Ground anchor.





Art	Type of light source
401BL	E27
401WH	

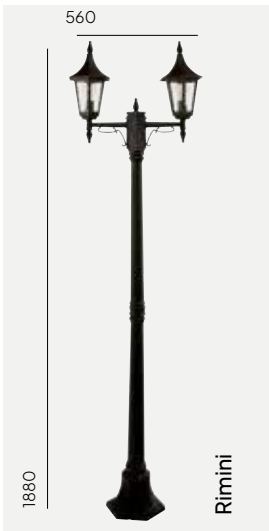

Art	Type of light source
402BL	E27
402WH	



Art	Type of light source
403BL	E27
403WH	

Poles




Art. 1277

Art. 1275

Art. 1273

Art. 3009


Art. 3011




Colour:



Colour:



Colour:



Colour:




Colour:



Accessories:


Art. 405

Concreting anchor.



Art. 406

Ground anchor.



Poles



Art. 3004 Art. 3005
Art. 3005 includes concreting anchor 7663.

Art. 2000

Art. 1255


Art. 1257

276




200

276




200

240



180

240



180

Colour:



AL



BL



GR

Colour:



AL



BL



GR

Colour:



AL



BL



GR

Colour:



AL



BL



GR


Art. 30101

Art. 3013

Art. 3013 includes terminal.

Art. 3010

265.5



207

Colour:




BL



WH

265.5



207

Colour:




BL



WH

265.5



207

Colour:



BL




WH

Accessories:


Art. 7661

Electric box




Art. 7662

Pole connector.




Art. 7663

Concreting anchor




Art. 144

Pole connector




Art. 305

Concreting anchor




Art. 306

Ground anchor



Special Icons




Natural Scandinavian wood.

We use only high-quality, natural Scandinavian wood, which adds warmth and elegance to the lamps. The natural Scandinavian wood used in the fittings refers to the Nordic style, its naturalness, lightness and subtlety.



Luminaires with energy distributor option adjustment.

Some of our lamps offer the possibility of energy distribution, allowing additional appliances or other lighting elements to be connected.




Fully replaceable electrical kit.

If required, our lamps allow for easy replacement of electrical components, ensuring a longer product life.



Handmade product (artisanal method).

Each lamp is meticulously handcrafted using traditional craftsmanship methods to guarantee its unique character. The power of craftsmanship.



Multiple light variants adjustment.

We offer a variety of lighting modes, from soft light to strong illumination, adapting to different lighting needs.



Vandal-resistant luminaire.

Our lamps are robustly manufactured and vandal-resistant, making them an ideal choice for public areas.




Product Eco-friendly.

We care about the environment. Our products are environmentally friendly and manufactured with minimal environmental impact in mind.




Luminaire suitable for extreme conditions.

The lamp construction is resistant to extreme weather conditions, from frost to heat, guaranteeing its durability.



Wide range of light direction

Our lamps are equipped with an adjustable head, allowing the direction of light to be set precisely according to individual needs.



Double corrosion protection (galvanising+powder coating).

Each lamp is protected against corrosion twice, first by galvanising and then by powder coating. This guarantees its longevity and resistance to weathering.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Our garden lights offer advanced energy control features that allow significant savings. Features such as light dimming, motion sensor and twilight sensor ensure that the light shines only when it is needed

Icons

Product Characteristics



Luminaire with socket for replaceable light source (GU10, E27, E14)



Luminaire with socket for interchangeable light sources.



LED luminaire

Luminaire equipped with LED module



Voltage 220-240V

Control



Motion sensor

Luminaire equipped with a motion sensor.



DIM dimmable version

Phase dimmable luminaire



DALI light control



Light control in the D4i system

Security



CE Certificate

CE - Manufacturers declaration that a labelled product complies with the requirements of the EU 'p.so-called 'New Approach' directive



Protection class (I, II, III)

Protection class I/ Luminaire with protective conductors.



Protection class II/protection by double or reinforced insulation.



Protection class III/low voltage protection.



IP

IP rating, determines whether the electrical equipment is suitable for various environmental conditions



IK

The IK shock resistance level is a measure of the resistance of electrical equipment enclosures to mechanical stress, particularly impact stress




Connection / application



Specified inrun strength (for recessed luminaires)

Overrun luminaire (for vehicles with pneumatic tyres)



Length of cable with plug or lngth of cable with open end.



Diameter of luminaire mounting on pole.

Light emission



Light (up, down)

Determination of the direction of the light beam emission.



Light (narrow down - wide up, narrow up, etc.)

Determination of the direction and angle of the light beam emission.



Swivel and tilt range

Adjustable light direction.



Light angle

Determination of the angle of the light beam emission.

Main and visual materials used



Steel



Stainless steel



Aluminium



Copper



Wood

Type of lens



Toughened / safe glass

Luminaire with safe glass diffuser.



PMMA (acrylic glass)

The luminaire uses PMMA (acrylic glass) diffuser.



PC (polycarbonate)

The luminaire uses PC (polycarbonate) diffuser.



Norlys AS
P.B 1014 Hoff, 0218 Oslo
Hovfaret 4B, 0275 Oslo
Norway

☎ +47 24 12 40 10
🌐 www.norlys.com
✉ firmapost@norlys.no