

A.24



Artemide®

A.24

Carlotta de Bevilacqua

↪ 2017

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.


→ PATENT PENDING



For further information on A24
↪ visit artemide.com



A.24 System typologies



90° ANGLE MAGNETIC
301 x 301 mm



90° ANGLE DIFFUSED
301 x 301 mm



90° ANGLE SHARPING
301 x 301 mm



CIRCULAR DIFFUSED
RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

CIRCULAR SHARPING
RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

CIRCULAR MAGNETIC
RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)



LINEAR MAGNETIC TRACK
1176 - 2352 mm



LINEAR DIFFUSED
1176 - 2352 mm



LINEAR SHARPING
1176 - 2352 mm

A.24 Stand-alone typologies

LINEAR MAGNETIC TRACK
1176 - 2352 mm



LINEAR DIFFUSED
1176 - 2352 mm




LINEAR SHARPING
1176 - 2352 mm



CIRCULAR SHARPING
Ø 1122 mm
Ø 1500 mm


CIRCULAR DIFFUSED
Ø 1122 mm
Ø 1500 mm

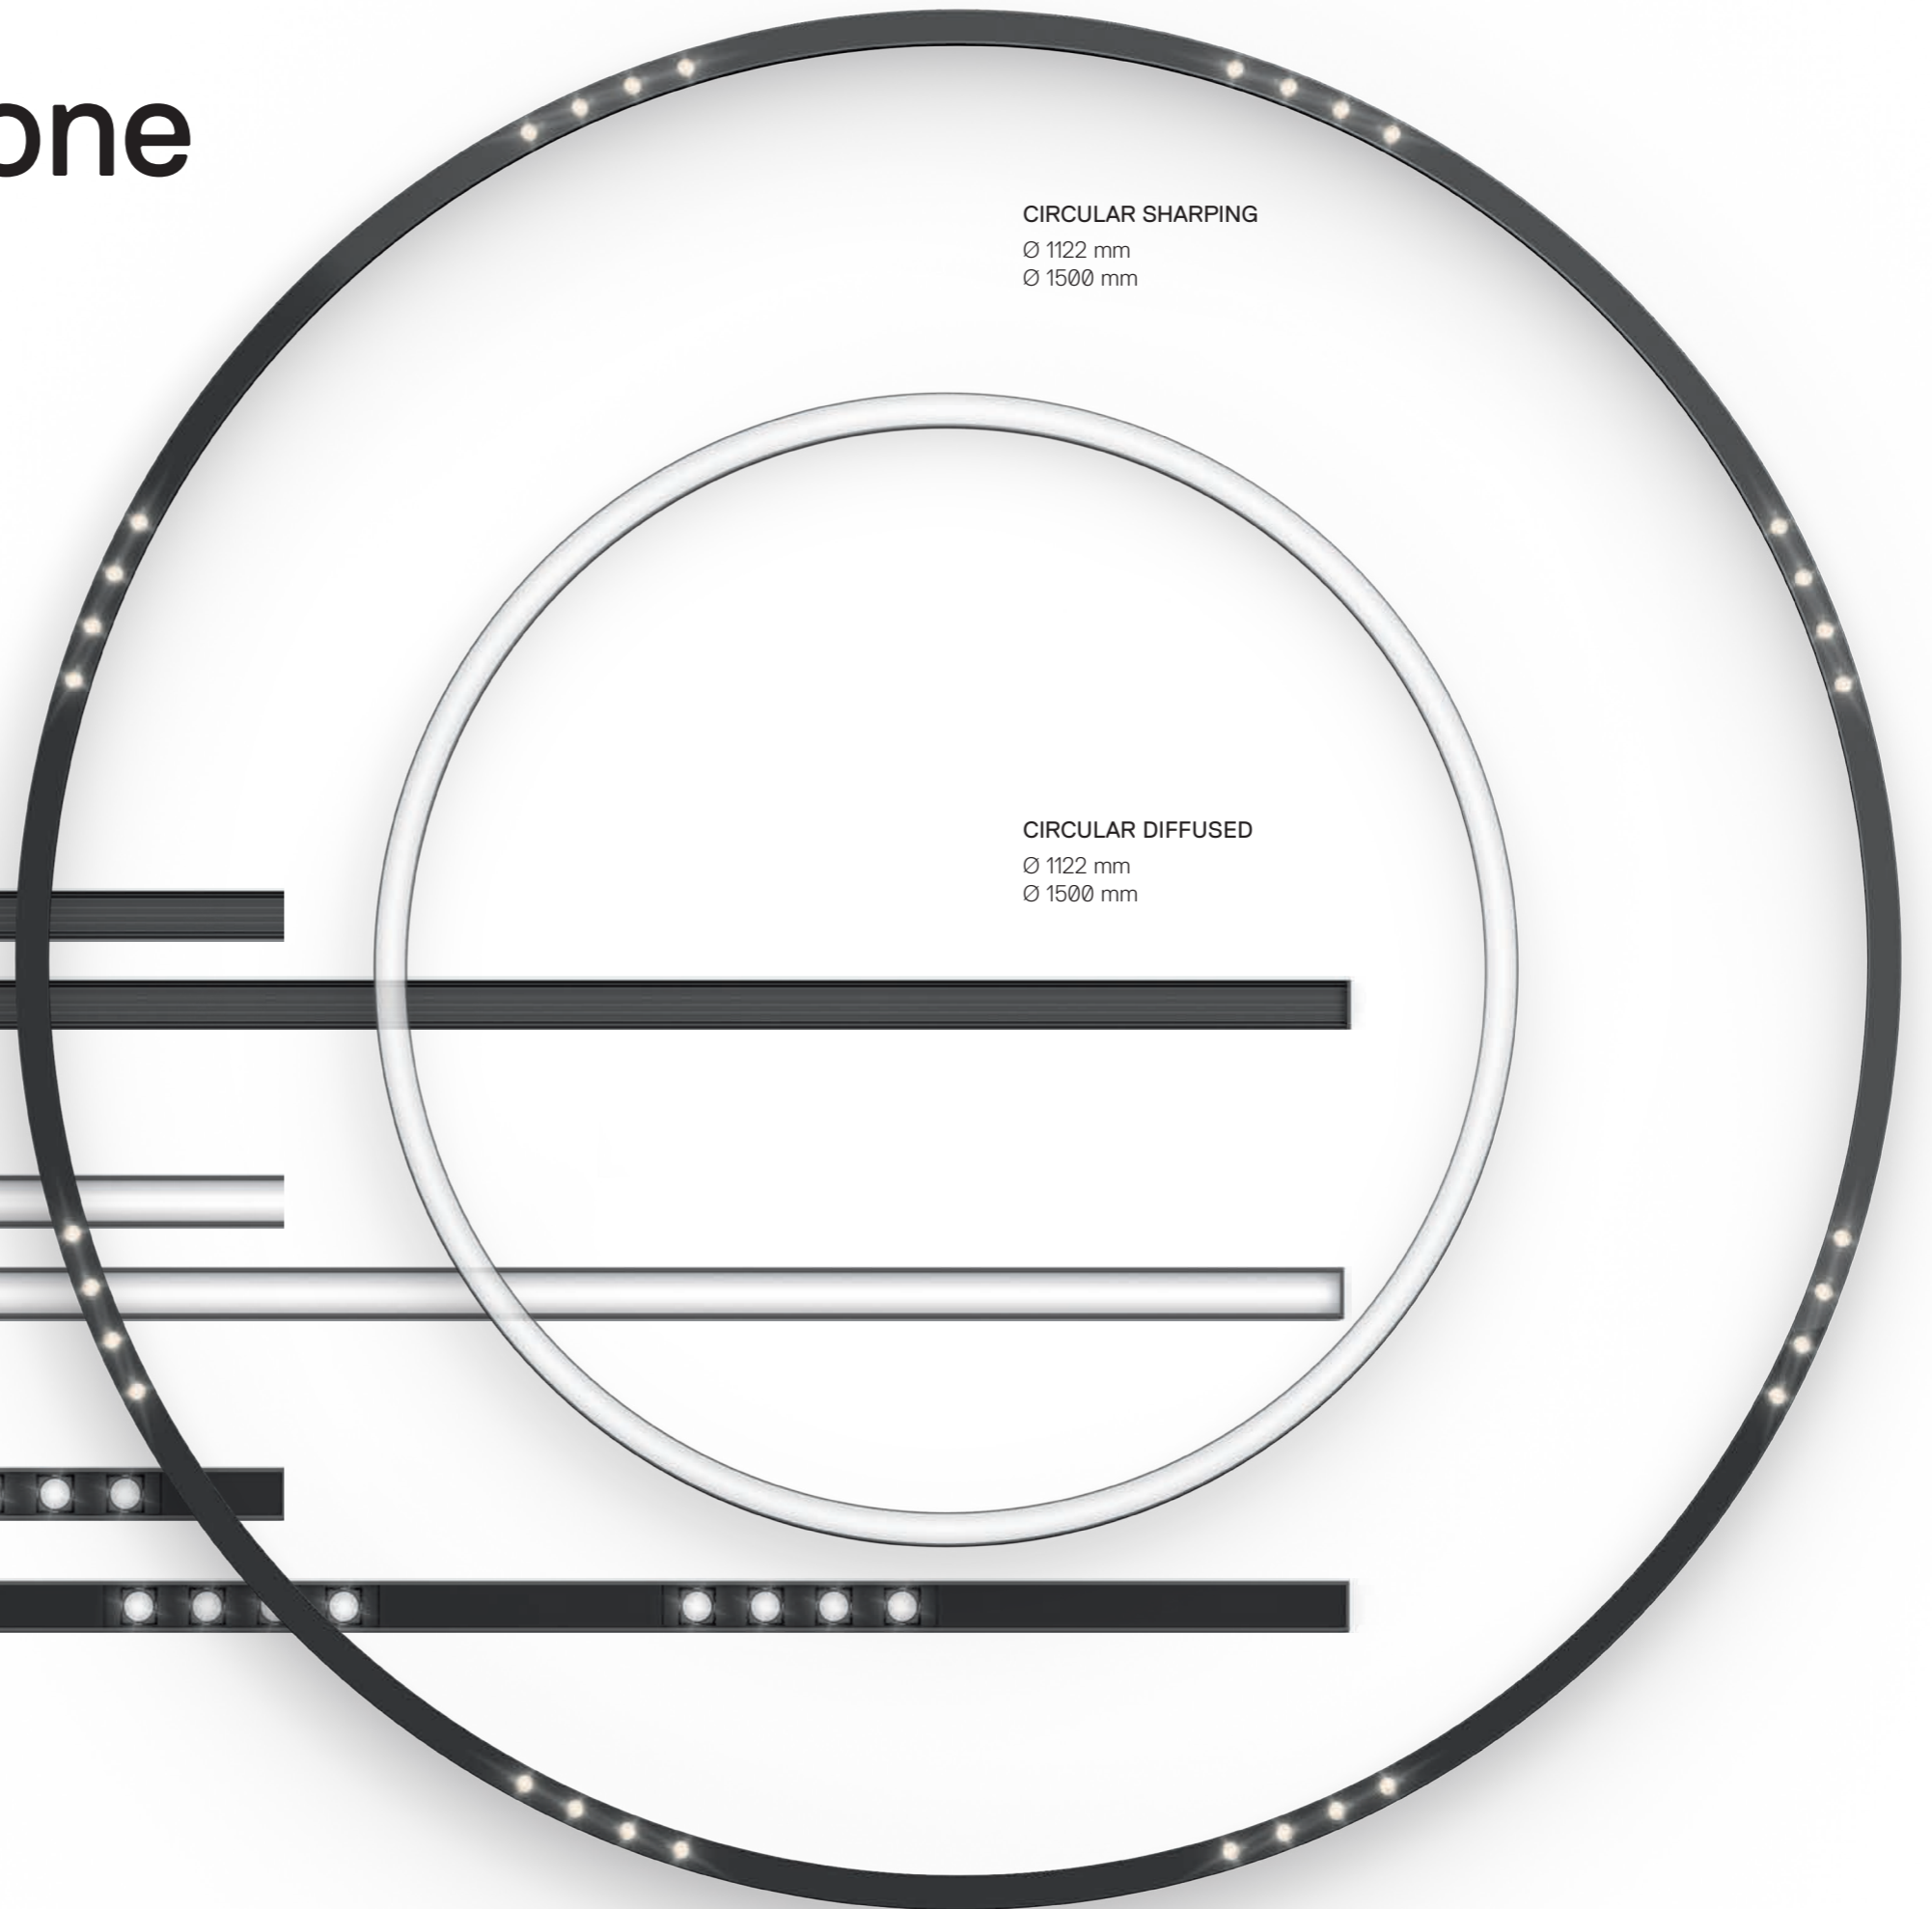




A.24/ Vector colors

White



01

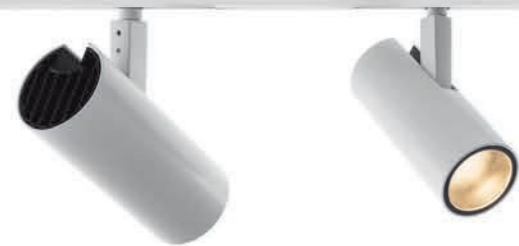

Black



04



Bronze



20



Brushed Copper



18



Brushed Silver



15



→ Fast delivery

→ Delivery time on demand

A.24

color temperatures



→ Fast delivery



→ Delivery time on demand



A.24 is fully addressable

Each module and spot can be managed separately by Artemide App or by DALI control



16W / 33W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K



10W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3000K / 4000K



S 13° 540 lm F 20° 584 lm WF 28° 528 lm

26W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3000K / 4000K




S 16° 1492 lm F 22° 1465 lm WF 32° 1596 lm

23W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3000K / 4000K



S 22° 660 lm → WF 32° 1137 lm

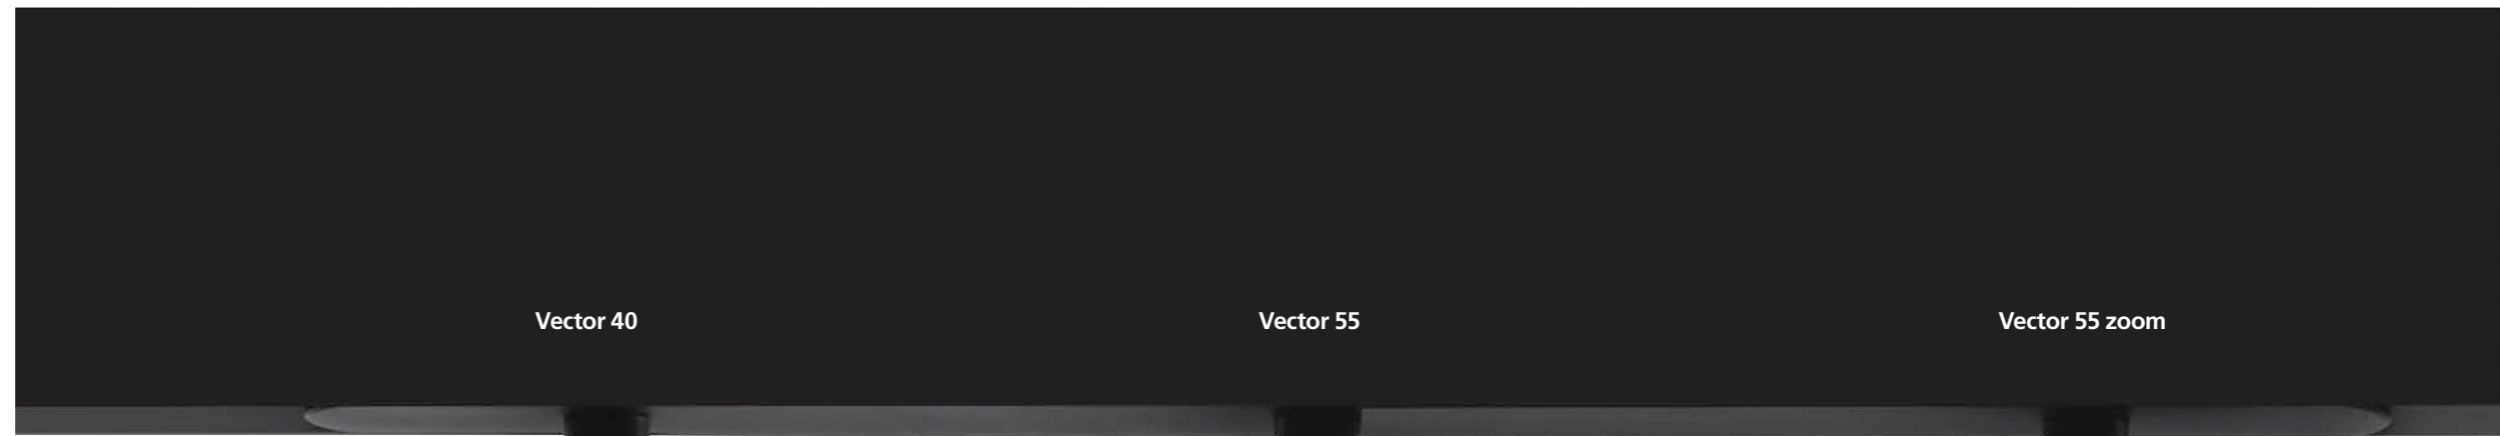

A.24
↪ Magnetic

A.24 Magnetic is Artemide SELV

a unique feature developed for a real
safe DALI interface.




D.art® is a technology patented by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.

The DALI signal is transformed to an “SELV” voltage ensuring the total safety of the appliance.

A.24 has been designed in compliance with international certifications.



16W / 33W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K

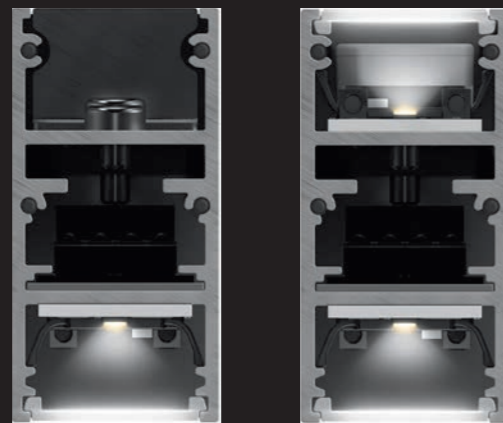


33W / 66W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K



A.24 Diffused



16W / 33W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K

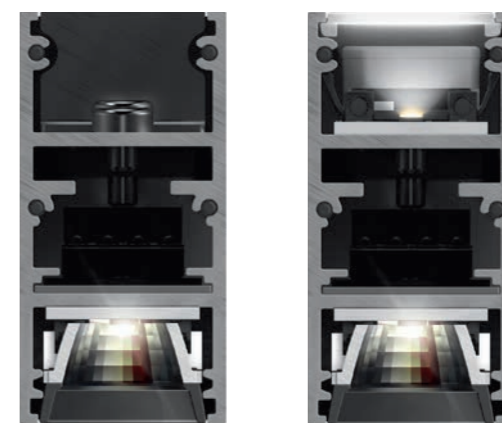

MacAdam 2SDC
CRI=90
CCT: 2700K / 3000K / 4000K



22W S 24° 22W XF 62° 46W S 24° 46W XF 62°

A.24 Sharping


RECESSED
TRIMLESS

CEILING

SUSPENSION

SUSPENSION WITH
INDIRECT EMISSION

A.24
space fittings

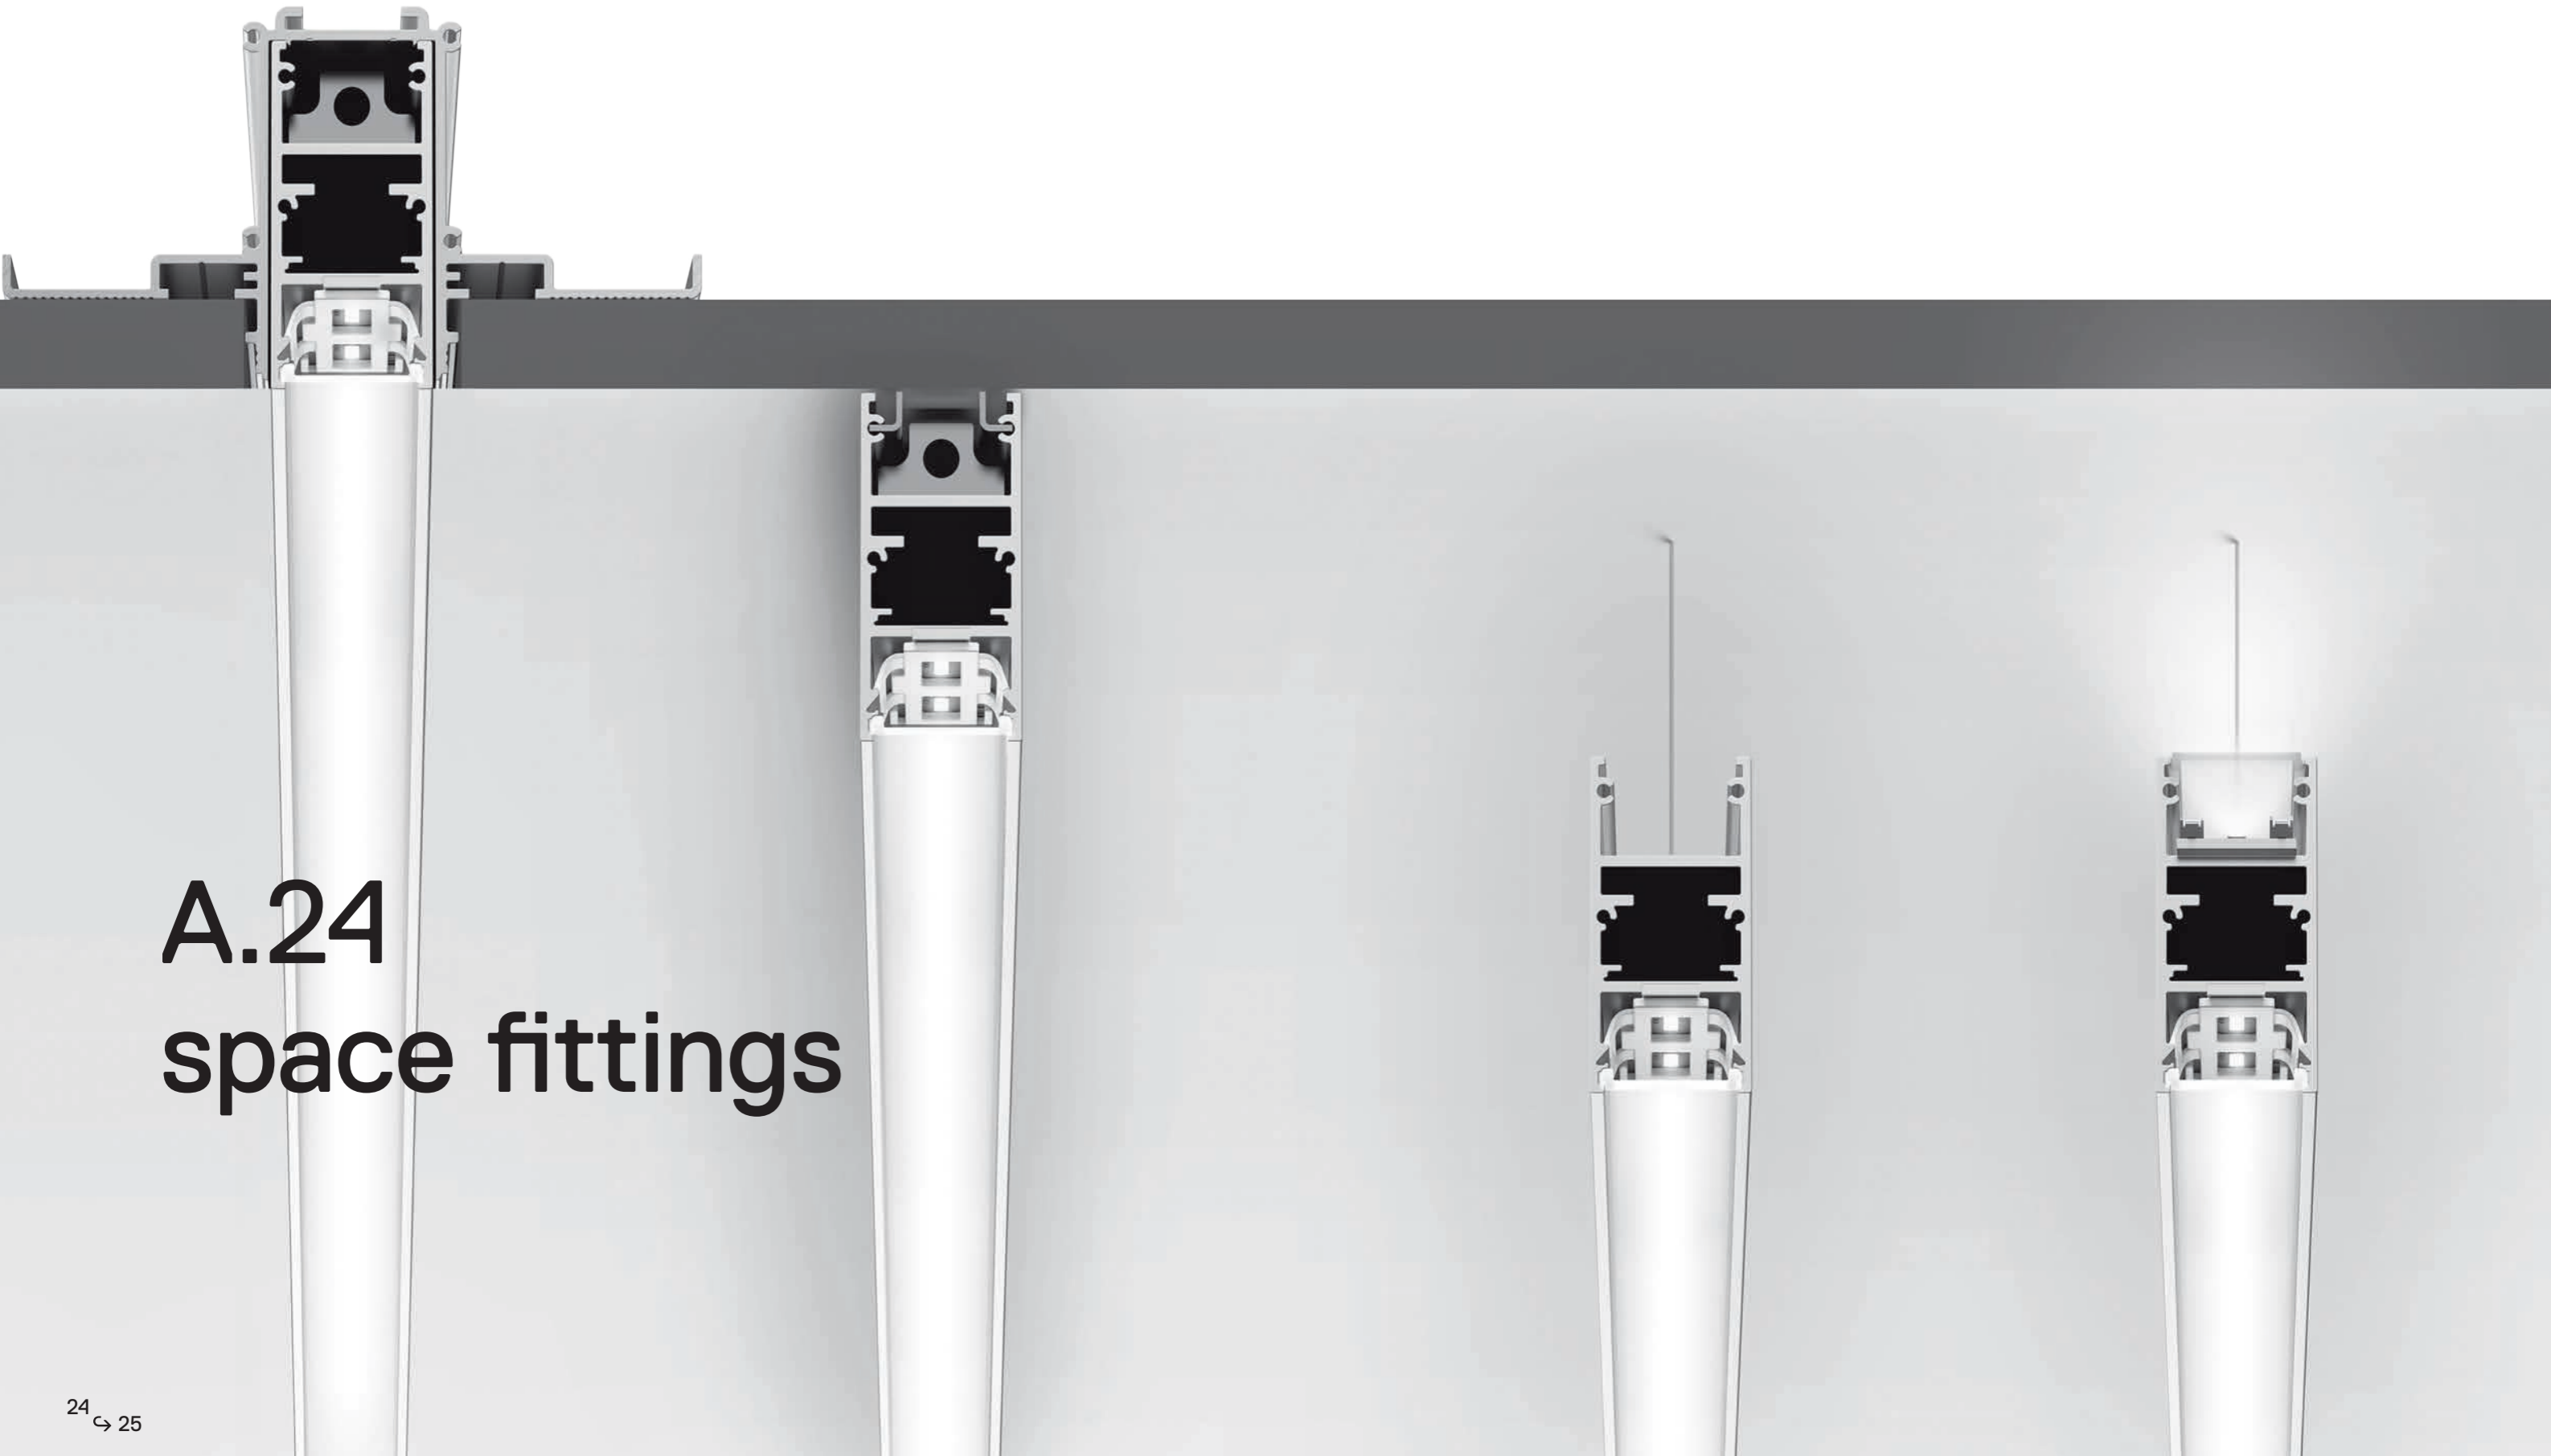

A.24 is balanced



NO TRACK'S ROTATION WHEN THE SPOTLIGHTS ARE TILTED IN THE SAME DIRECTION.
SUSPENSION CABLE NO STIFF STEMS.





The junction arm is integrated with the spotlight body.

The center of balance is perfectly aligned with the track.

The pivoting and arm orientation are lockable.

A.24 / Vector infinite possibilities

- 1. A.24 Recessed diffused emission
- 2. Vector 40 magnetic
- 3. Vector 55 magnetic
- 4. A.24 Ceiling - wall diffused emission
- 5. A.24 Suspension sharpening emission 24°
- 6. A.24 Suspension diffused emission
- 7. A.24 Suspension sharpening emission 64°
- 8. Vector 55 zoom magnetic
- 9. Vector 40 /Unterlinden magnetic pendant
- 10. A.24 Suspension indirect diffused emission

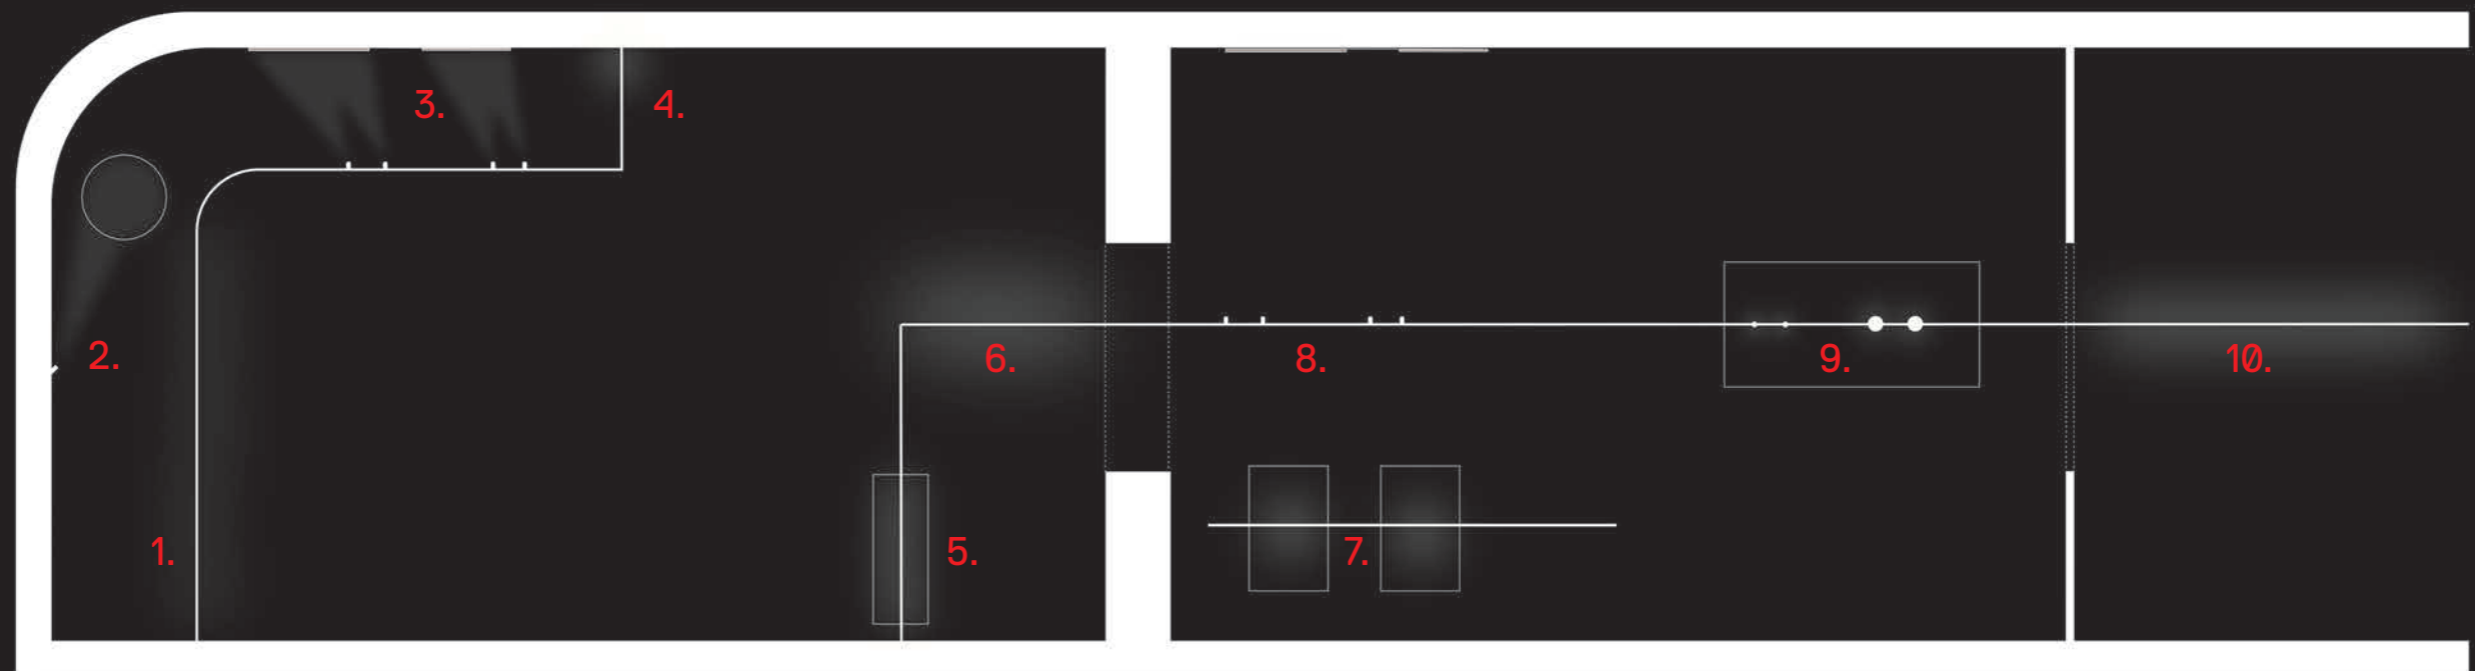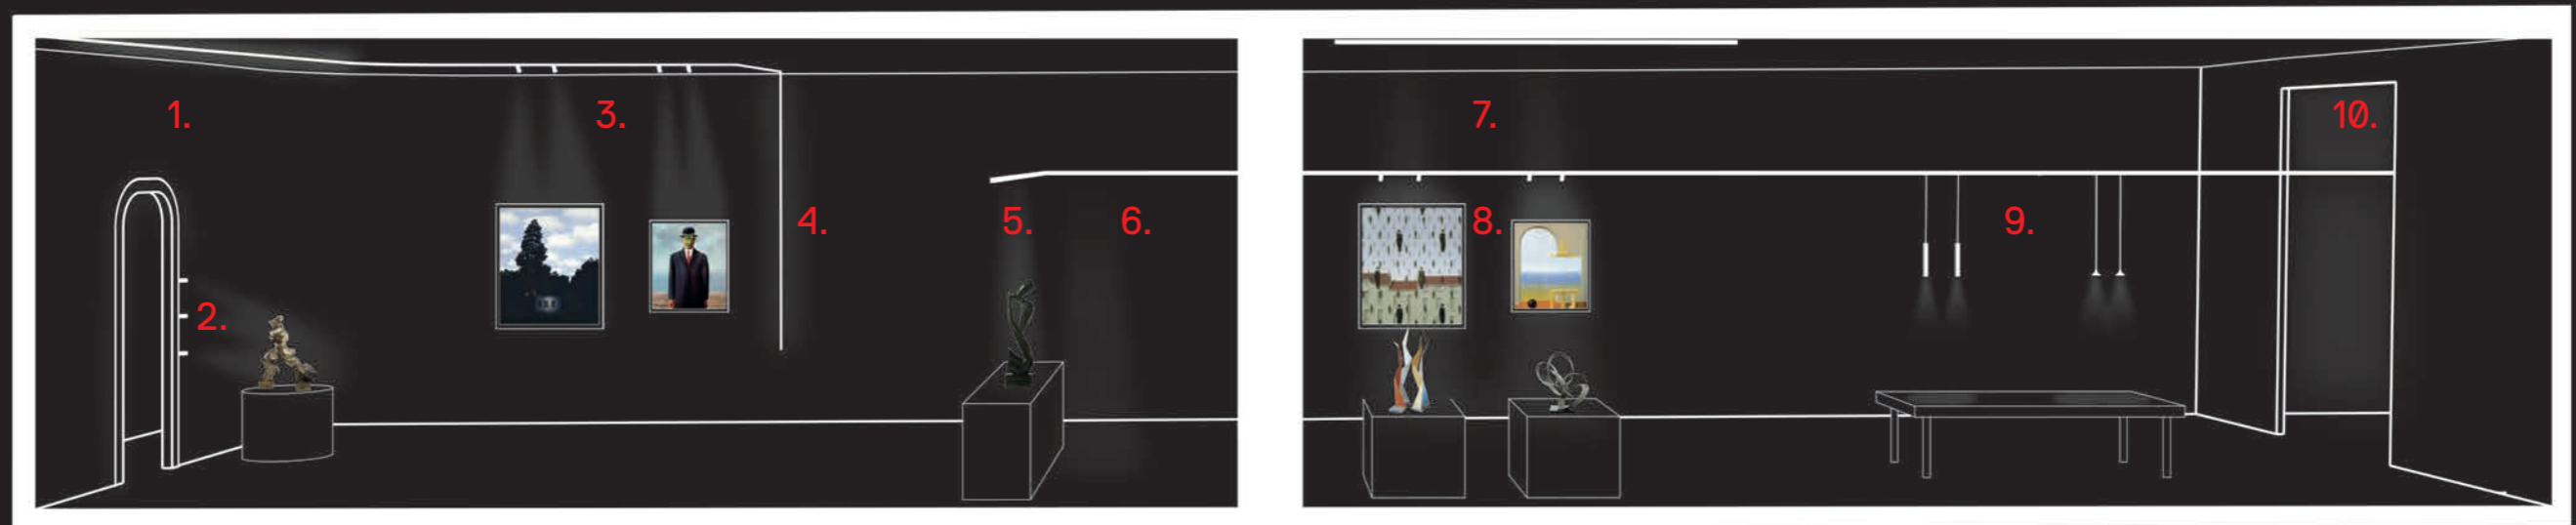

A.24

pre-configured modules

Each module (magnetic track, diffused, sharpening) is pre-configured and it is provided with:

01. the specific optical engine (magnetic, diffused, sharpening).
02. the mechanical and electrical connections to combine for a continuous run.
03. each suspension module is equipped with a suspension cable.
04. each ceiling module is equipped with 1 ceiling bracket for 1176 mm length or with 2 ceiling brackets for 2352 mm length.



A.24 components

MAGNETIC TRACK

FEEDING CABLES CAN BE LOCATED EVERYWHERE, INCLUDING CORNERS. TRACK ANGLED ELEMENTS CAN INDEPENDENTLY FEED EACH ARMS.

USE INSULATING SPACERS WHEN USING SEVERAL POWERSUPPLY KITS.

DIFFUSING AND JOINING ANGLED ELEMENTS FEED BOTH ARMS TOGETHER.

TRANSITION COMPONENT WHEN PASSING FROM ONE TECHNOLOGY TO A DIFFERENT ONE.

DIFFUSED | SHARPING

A.24 is powered by 48 Vdc

It permits long runs
in a small size 27x54 mm



MAGNETIC

VECTOR 40

max 12 with 1 Power Supply 150W - effective 125W
max 21 with 1 Power Supply 240W - effective 210W

VECTOR 55

max 4 with 1 Power Supply 150W - effective 125W
max 8 with 1 Power Supply 240W - effective 210W

DIFFUSED

DIRECT

max 4,70 m with 1 Power Supply 150W - effective 125W
max 8,23 m with 1 Power Supply 240W - effective 210W

DIRECT-INDIRECT

max 2,35 m with 1 Power Supply 150W - effective 125W
max 4,70 m with 1 Power Supply 240W - effective 210W

SHARPING

DIRECT


max 5,88 m with 1 Power Supply 150W - effective 125W
max 10,58 m with 1 Power Supply 240W - effective 210W

DIRECT-INDIRECT


max 3,52 m with 1 Power Supply 150W - effective 125W
max 5,88 m with 1 Power Supply 240W - effective 210W

A.24


power supply

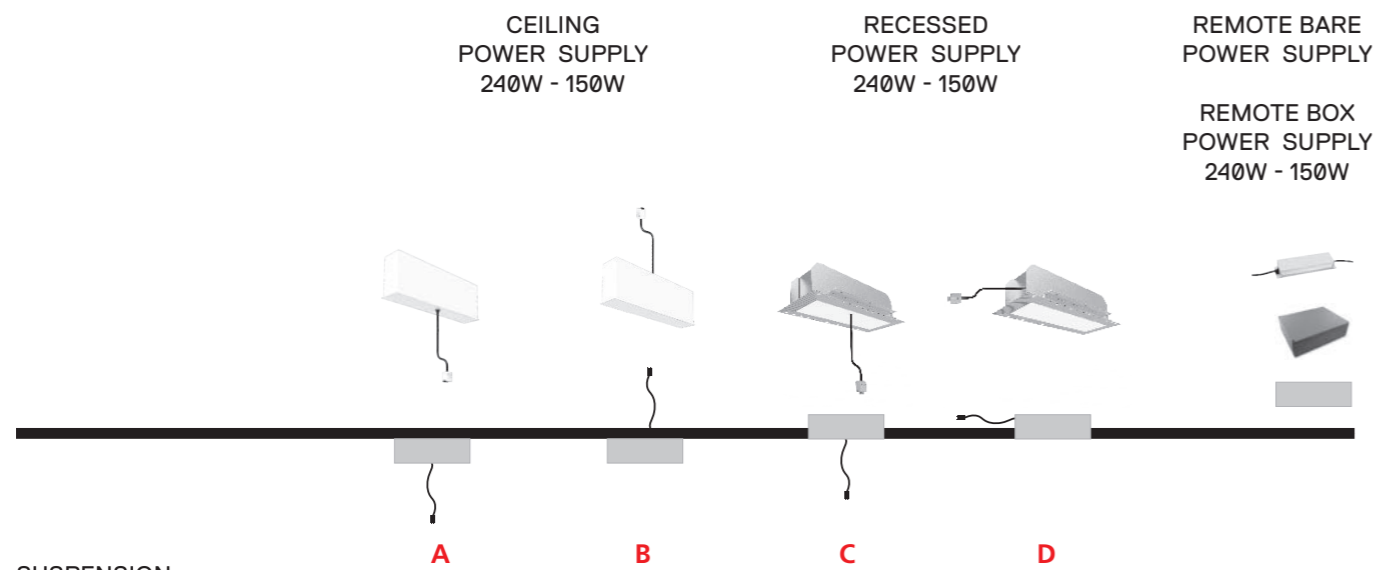



SUSPENSION




SMD



RECESSED

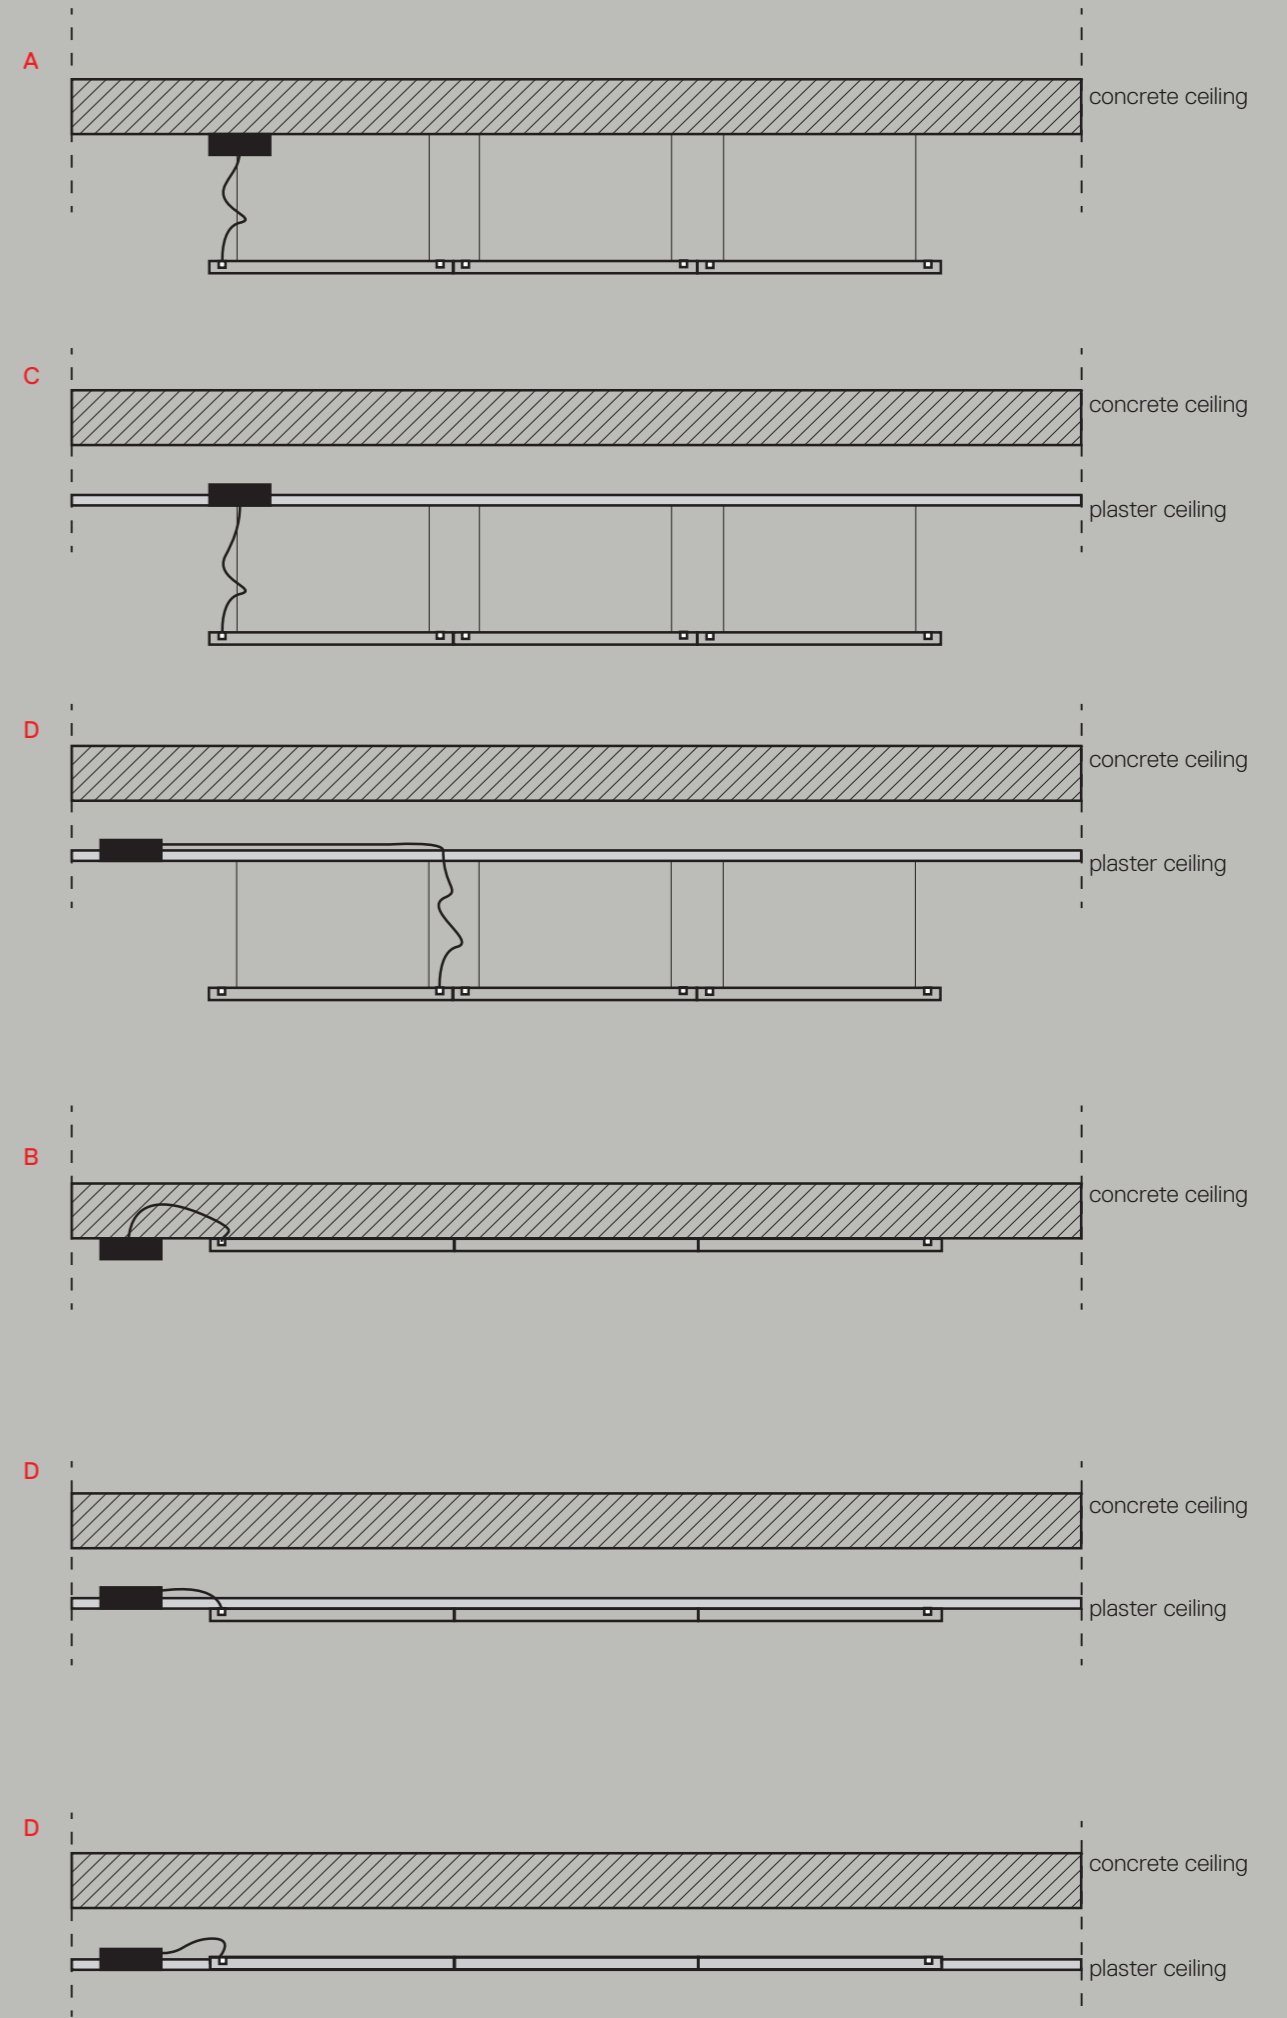

The Maltheim Experience

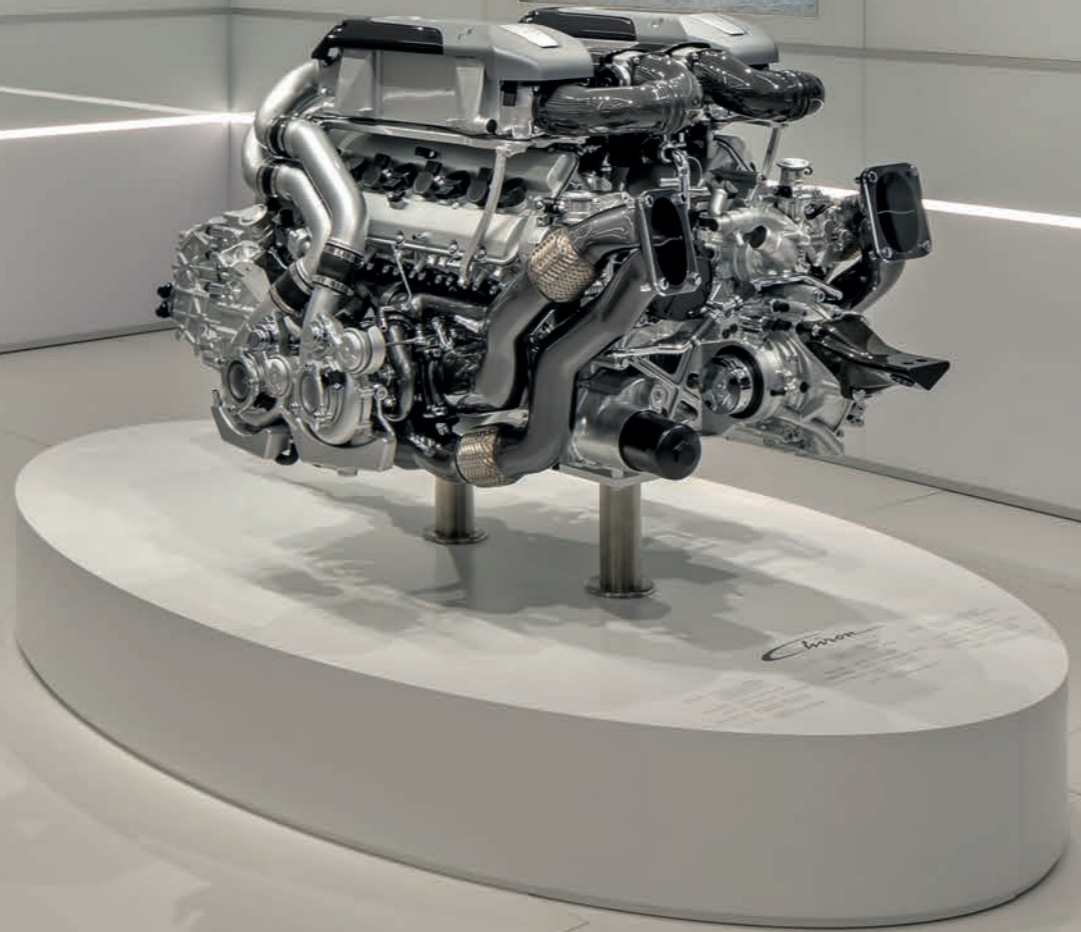

A.24
↪ System





↪ A.24 RECESSED MAGNETIC TRACK

White Black




IP20



Linear elements

Length
1176mm
2352 mm


Code
AQ150. 01/04
AQ151. 01/04

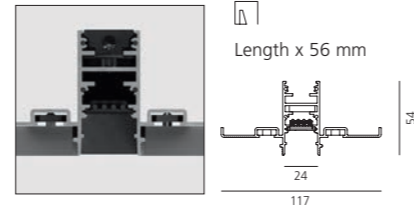

Angle elements


90° on same plane track angle elements
301 x 301 mm

Code
AQ155. 01/04

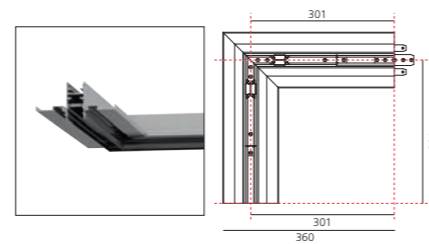

90° on perpendicular planes track angle elements
276x276mm


Code
AQ156. 01/04

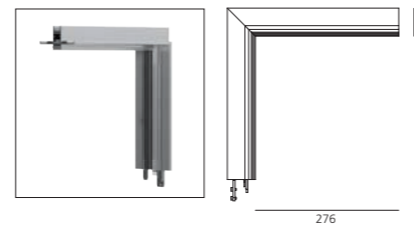

Curved joining elements (not magnetic)

Radius	Alpha
561 mm	60°
	90°
750 mm	45°
	90°

Code
AQ500. 01/04
AQ510. 01/04
AQ520. 01/04
AQ530. 01/04

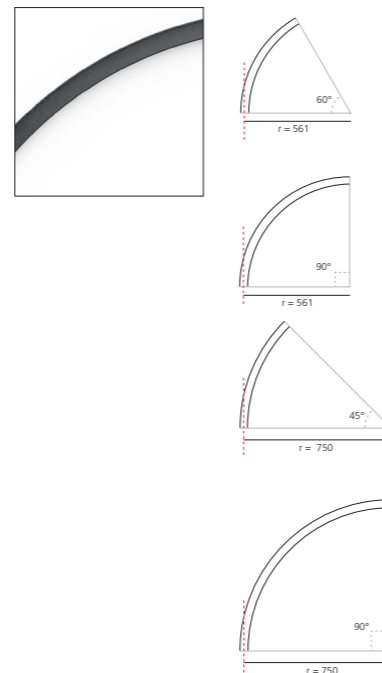

Formwork (aluminum)

Length	Radius	Alpha
Curved	561 mm	60°
		90°
	750 mm	45°
		90°

Code
AQ59000
AQ59100
AQ59200
AQ59300
AQ29400

End caps (2pcs)

Each linear, angle and curved element is provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Accessories

	Insulating spacer (1 pcs) use between modules powered by different power supplies
--	--

Code
AQ152. 01/04

	End caps (2 pcs)
--	---------------------

AQ153. 01/04

	Transition joint use between different typology modules (track-diffusing-sharping)
--	---

AQ290. 01/04

Power supply

	240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 396x195x112H
--	--

Undimmable Code
AQ17801

	240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 396x195x112H
--	--

Dimmable DALI /APP Code
AQ16801
AQ16801APP

	240W Ceiling power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 351x61x111H
--	--

AQ173. 01/04

	240W Ceiling power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 321x91x111H
--	--

AQ172. 01/04
AQ172. 01/04 APP

	150W Ceiling power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 351x61x111H
--	--

AQ179. 01/04

	150W Ceiling power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 321x91x111H
--	--

AQ177. 01/04
AQ177. 01/04 APP

	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H
--	---

AQ18000

	DALI to DALI-Selv Interface 103x67x21H
--	---

AQ18200

	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H
--	---

AQ18100

	240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 313x243x57,5H
--	---

AQ16000
AQ16000APP

Power supply Accessory

4pcs feed connectors (for powering multiple sections with a single power kit)
--

Code
AQ90500

Power cable, 2x0.75 + 2x0.35, mm², white, 10m (to realize customized power cables)

AQ90600

Power cable, 2x0.75 + 2x0.35, mm², white, 50m (to realize customized power cables)

AQ90700

Power cable, 2x0.75 + 2x0.35, mm², black, 10m (to realize customized power cables)

AQ90800

Power cable, 2x0.75 + 2x0.35, mm², black, 50m (to realize customized power cables)

AQ90900

↪ A.24 SUSPENSION MAGNETIC TRACK

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	WF	*Uses 1 DALI address	IP20
01	04	15	18	20			
Fast delivery		Delivery time on demand					


Linear elements

Length	Code
1176 mm	AQ400. 01/04 15/18/20
2352 mm	AQ401. 01/04 15/18/20




Linear + indirect emission elements

Length	W	CRI	Flux	CCT	Code
1176 mm*	16W	80	1524 lm	2700K	AQ406. 01/04 15/18/20
				3000K	AQ402. 01/04 15/18/20
				4000K	AQ403. 01/04 15/18/20
2352 mm	33W	80	3049 lm	2700K	AQ407. 01/04 15/18/20
				3000K	AQ404. 01/04 15/18/20
				4000K	AQ405. 01/04 15/18/20






90° angle elements

90° suspended track corner (on same plane)	Code
301x301mm	AQ492. 01/04 15/18/20



Curved joining elements (not magnetic)

Radius	Alpha	Code
561 mm	60°	AQ700. 01/04 15/18/20
	90°	AQ710. 01/04 15/18/20
750 mm	45°	AQ720. 01/04 15/18/20
	90°	AQ730. 01/04 15/18/20



Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. For the effective powers of the drivers, see the table on page. 331

Accessories

	Insulating spacer (1 pcs) between modules powered by different power supplies	Code AQ491. 01/04 15/18/20
	End cap (2 pcs) including 2 suspension cables 200H	AQ490. 01/04 15/18/20
	Transition joint between different typology modules (track-diffusing-sharpping)	AQ494. 01/04 15/18/20
	Auxiliary suspension cable (1 pcs) to be used for S-configuration	AQ49500

Power supply

	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	Undimmable Code AQ174. 01/04		240W (eff. 210W) Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	Dimmable DALI / APP Code AQ154. 01/04 AQ154. 01/04 APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ171. 01/04		240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20	AQ161. 01/04 AQ161. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ176. 01/04		321x91x111H 150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20	AQ175. 01/04 AQ175. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000		321x91x111H DALI to DALI-Selv Interface 103x67x21H	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100		240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 313x243x57,5H	AQ16000 AQ16000APP

Power supply Accessory

4pcs feed connectors (for powering multiple sections with a single power kit)	Code AQ90500
Power cable, 2x0.75 + 2x0.35, mm², white, 10m (to realize customized power cables)	AQ90600
Power cable, 2x0.75 + 2x0.35, mm², white, 50m (to realize customized power cables)	AQ90700
Power cable, 2x0.75 + 2x0.35, mm², black, 10m (to realize customized power cables)	AQ90800
Power cable, 2x0.75 + 2x0.35, mm², black, 50m (to realize customized power cables)	AQ90900






↪ A.24 CEILING MAGNETIC TRACK



IP20


Linear elements

Length	Code
1176 mm	AQ300. 01/04 15/18/20
2352 mm	AQ301. 01/04 15/18/20




90° angle elements

Code
AQ392. 01/04 15/18/20

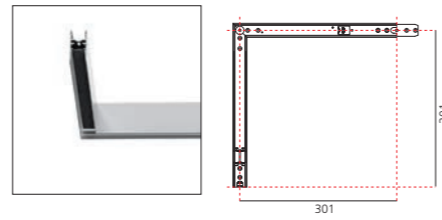


Code
AQ393. 01/04 15/18/20

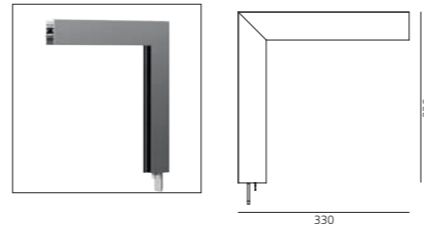

Curved joining elements (not magnetic)

Radius	Alpha	Code
561 mm	60°	AQ600. 01/04 15/18/20
	90°	AQ610. 01/04 15/18/20
750 mm	45°	AQ620. 01/04 15/18/20
	90°	AQ630. 01/04 15/18/20

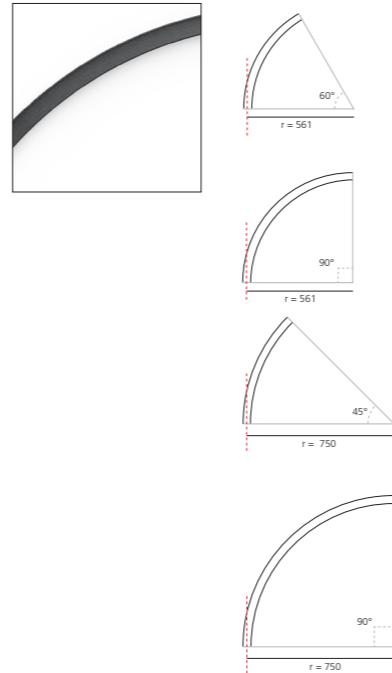

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176 mm length or 2 for 2352 mm length. End caps have to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. For the effective powers of the drivers, see the table on page. 331

Accessories

Code
AQ391. 01/04 15/18/20
AQ390. 01/04 15/18/20
AQ395. 01/04 15/18/20
AQ394. 01/04 15/18/20

Power supply

Code
AQ17801
AQ173. 01/04
AQ179. 01/04
AQ18000
AQ18100

Undimmable

Code
AQ17801
AQ173. 01/04
AQ179. 01/04
AQ18000
AQ18100

Dimmable DALI / APP

Code
AQ16801 AQ16801APP
AQ172. 01/04 AQ172. 01/04 APP
AQ177. 01/04 AQ177. 01/04 APP
AQ18200
AQ16000 AQ16000APP

Power supply Accessory

Code
AQ90500
AQ90600
AQ90700
AQ90800
AQ90900

4pcs feed connectors
(for powering multiple sections with a single power kit)

Power cable, 2x0.75 + 2x0.35, mm², white, 10m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², white, 50m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 10m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 50m
(to realize customized power cables)

VECTOR MAGNETIC TRACK

White 01 Black 04 Fast delivery

Brushed Silver 15 Delivery time on demand

Brushed Copper 18

Brushed Bronze 20

S F WF


Delivery time on demand 2700K / 4000K

MacAdam 3SDCM CRI = 80

IP20

VECTOR 30 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code	
6 W	S 16°	422 lm	2700K	AP811. 01/04 15/18/20	
			3000K	AP801. 01/04 15/18/20	
			4000K	AP851. 01/04 15/18/20	
		F 20°	404 lm	2700K	AP812. 01/04 15/18/20
				3000K	AP802. 01/04 15/18/20
				4000K	AP852. 01/04 15/18/20
	WF 28°	373 lm	2700K	AP813. 01/04 15/18/20	
			3000K	AP803. 01/04 15/18/20	
			4000K	AP853. 01/04 15/18/20	



Life L90 (10K)>60500h

VECTOR 40 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code	
10 W	S 13°	505 lm	2700K	AP011. 01/04 15/18/20	
			3000K	AP001. 01/04 15/18/20	
			4000K	AP051. 01/04 15/18/20	
		*F 20°	542 lm	2700K	AP012. 01/04 15/18/20
				3000K	AP002. 01/04 15/18/20
				4000K	AP052. 01/04 15/18/20
	*WF 28°	490 lm	2700K	AP013. 01/04 15/18/20	
			3000K	AP003. 01/04 15/18/20	
			4000K	AP053. 01/04 15/18/20	



Life L90 (10K) 60500h

VECTOR MAGNETIC TRACK

White 01 Black 04 Fast delivery

Brushed Silver 15 Delivery time on demand

Brushed Copper 18

Brushed Bronze 20

S F WF


Delivery time on demand 2700K / 4000K

MacAdam 3SDCM *MacAdam 2SDCM CRI = 90

IP20

VECTOR 55 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code	
26 W	S 16°	1433 lm	2700K	AP111. 01/04 15/18/20	
			3000K	AP101. 01/04 15/18/20	
			4000K	AP151. 01/04 15/18/20	
		F 22°	1408 lm	2700K	AP112. 01/04 15/18/20
				3000K	AP102. 01/04 15/18/20
				4000K	AP152. 01/04 15/18/20
	WF 32°	1534 lm	2700K	AP113. 01/04 15/18/20	
			3000K	AP103. 01/04 15/18/20	
			4000K	AP153. 01/04 15/18/20	



Life L80 (9K)>50000h

VECTOR 55 ZOOM MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
23 W	F 22°-WF 32°	660 - 1137 lm	2700K	AP114. 01/04 15/18/20
			3000K	AP104. 01/04 15/18/20
			4000K	AP154. 01/04 15/18/20



Life L80 (9K)>50000h

Accessoires	Color	Vector 40 Code	Vector 55 Code
Accessories holder		AP90100	AP91100
Lens for elliptical emission		AP90200	AP91200
Soft filter		AP90300	AP91300
Anti-dazzle louvre		AP90400	AP91400
Adjustable dowsters	●		AP91500

↪ VECTOR PENDANT SECURLOCK

White Black Brushed Silver Brushed Copper Brushed Bronze S F WF


01 04 15 18 20

Fast delivery Delivery time on demand

Delivery time on demand 2700K / 4000K MacAdam 3SDCM CRI = 90 IP20

VECTOR 30 PENDANT SECURLOCK

W	Beam	Flux	CCT	Dimmable DALI Code
6 W	S 16°	422 lm	2700K	BN311. 01/04 15/18/20
			3000K	BN301. 01/04 15/18/20
			4000K	BN351. 01/04 15/18/20
	F 20°	404 lm	2700K	BN312. 01/04 15/18/20
			3000K	BN302. 01/04 15/18/20
			4000K	BN352. 01/04 15/18/20
	WF 28°	373 lm	2700K	BN313. 01/04 15/18/20
			3000K	BN303. 01/04 15/18/20
			4000K	BN353. 01/04 15/18/20

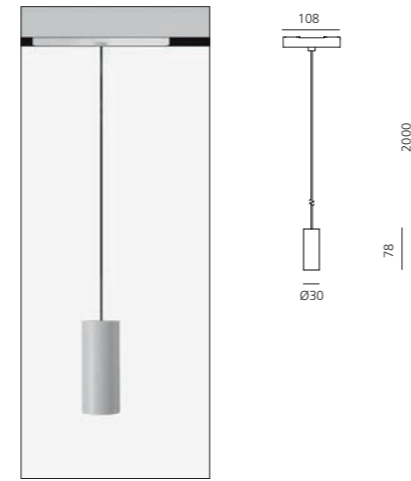

Life L90 (10K) 60500h

↪ VECTOR PENDANT SECURLOCK

White Black Brushed Silver Brushed Copper Brushed Bronze S F WF


01 04 15 18 20

Fast delivery Delivery time on demand

Delivery time on demand 2700K / 4000K MacAdam 3SDCM CRI = 90 IP20

VECTOR 55 PENDANT SECURLOCK


W	Beam	Flux	CCT	Dimmable DALI Code
26 W	S 16°	1433 lm	2700K	AP311. 01/04 15/18/20
			3000K	AP301. 01/04 15/18/20
			4000K	AP351. 01/04 15/18/20
	F 22°	1408 lm	2700K	AP312. 01/04 15/18/20
			3000K	AP302. 01/04 15/18/20
			4000K	AP352. 01/04 15/18/20
	WF 32°	1534 lm	2700K	AP313. 01/04 15/18/20
			3000K	AP303. 01/04 15/18/20
			4000K	AP353. 01/04 15/18/20

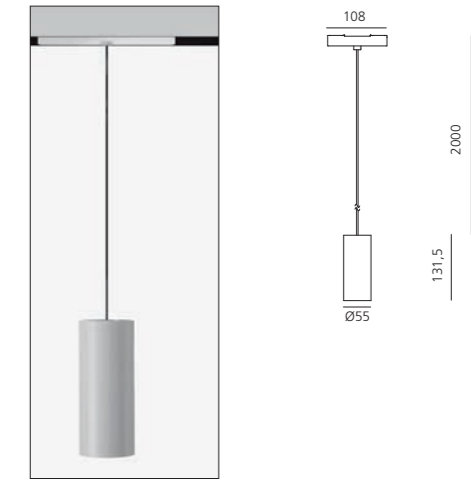

Life L80 (9K)>50000h

VECTOR 40 PENDANT SECURLOCK

W	Beam	Flux	CCT	Dimmable DALI Code
10 W	S 13°	505 lm	2700K	AP211. 01/04 15/18/20
			3000K	AP201. 01/04 15/18/20
			4000K	AP251. 01/04 15/18/20
	F 20°	542 lm	2700K	AP212. 01/04 15/18/20
			3000K	AP202. 01/04 15/18/20
			4000K	AP252. 01/04 15/18/20
	WF 28°	490 lm	2700K	AP213. 01/04 15/18/20
			3000K	AP203. 01/04 15/18/20
			4000K	AP253. 01/04 15/18/20

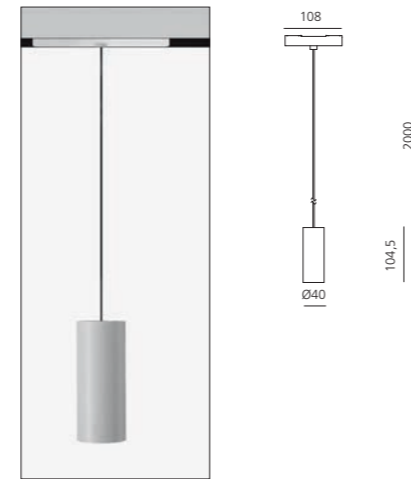

Life L90 (10K) 60500h




↪ A.24 RECESSED DIFFUSED EMISSION

White WF *Uses 1 DALI address MacAdam 2SDCM IP20
** Uses 2 DALI addresses Life L80 (10K)>55000h ☞
CRI = 80


Formwork (aluminum)		
Length	Radius	Alpha
Linear 1176mm		
Linear 2352 mm		
90° angle on the same plane		
90° angle on perpendicular		
Curved	561 mm	60°
	750 mm	90°
		45°
		90°

Code
AQ29100
AQ29200
AQ29300
AQ29500
AQ59000
AQ59100
AQ59200
AQ59300
AQ29400

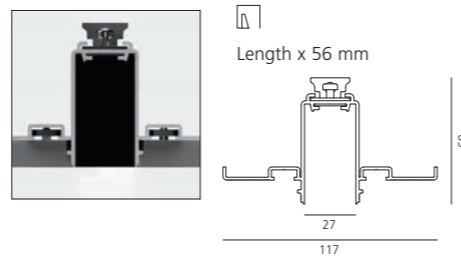


Linear direct emission elements			
Length	W	Flux	CCT
1176mm*	33W	2841 lm	2700K
		2884 lm	3000K
		3013 lm	4000K
2352 mm**	66W	5682 lm	2700K
		5769 lm	3000K
		6027 lm	4000K

Code
AQ27001
AQ20001
AQ20101
AQ27101
AQ20201
AQ20301




90° angle direct emission elements			
	W	Flux	CCT
90° on same plane angle direct emission elements 301 x 301 mm*	16W	1420 lm	2700K
		1442 lm	3000K
		1506 lm	4000K

Code
AQ27201
AQ20401
AQ20501

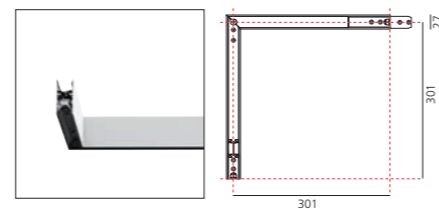


	W	Flux	CCT
90° on perpendicular plane angle direct emission elements 330 x 330 mm*	16W	1362 lm	2700K
		1383 lm	3000K
		1444 lm	4000K

Code
AQ27301
AQ20701
AQ20801

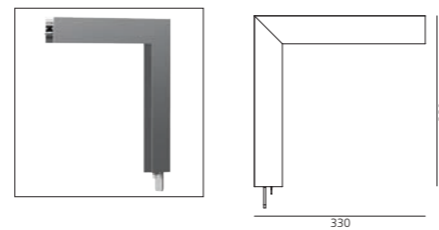

Curved direct emission elements				
Radius	Alpha	W	Flux	CCT
561 mm*	60°	16W	1347 lm	2700K
			1367 lm	3000K
			1429 lm	4000K
	90°	24W	2020 lm	2700K
			2051 lm	3000K
			2143 lm	4000K
750 mm*	45°	16W	1347 lm	2700K
			1367 lm	3000K
			1429 lm	4000K
	90°	34W	2694 lm	2700K
			2735 lm	3000K
			2857 lm	4000K

Code
AQ50701
AQ50101
AQ50201
AQ51701
AQ51101
AQ51201
AQ52701
AQ52101
AQ52201
AQ53701
AQ53101
AQ53201

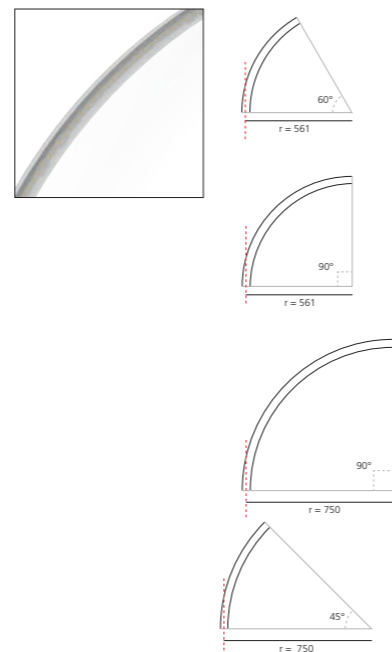

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. For the effective powers of the drivers, see the table on page. 331

Accessories		Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ20601
	End caps (2 pcs)	AQ25001
	Transition joint use between different typology modules (track-diffusing-sharpening)	AQ29001
	Opal diffusing screen	
	10m	AQ16200
	25m	AQ16300
	50m	AQ16400
	1176 mm	AQ16500
	2352 mm	AQ16600
	3528 mm	AQ16700
	Flexible opal diffusing screen	
	5m	AQ90300
	10m	AQ90000
	25m	AQ90100
	50m	AQ90200

Power supply Accessory		Code
	4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
	Power cable, 2x0.75 + 2x0.35, mm², white, 10m (to realize customized power cables)	AQ90600
	Power cable, 2x0.75 + 2x0.35, mm², white, 50m (to realize customized power cables)	AQ90700
	Power cable, 2x0.75 + 2x0.35, mm², black, 10m (to realize customized power cables)	AQ90800
	Power cable, 2x0.75 + 2x0.35, mm², black, 50m (to realize customized power cables)	AQ90900

Power supply		Undimmable
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 396x195x112H	Code AQ17801
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 351x61x111H	AQ17301
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 351x61x111H	AQ17901
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☉ (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☉ (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100

Dimmable DALI / APP		Code
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 396x195x112H	AQ16801 AQ16801APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 321x91x111H	AQ172. 01/04 AQ172. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 321x91x111H	AQ177. 01/04 AQ177. 01/04 APP
	DALI to DALI-Selv Interface 103x67x21H	AQ18200
	240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☉ 313x243x57,5H	AQ16000 AQ16000APP

↪ A.24 SUSPENSION DIFFUSED EMISSION



*Uses 1 DALI address
** Uses 2 DALI addresses
*** Uses 3 DALI addresses


MacAdam 2SDCM
Life L80 (10K)>55000h
CRI = 80

IP20

Linear direct emission elements

Length	W	Flux	CCT
1176 mm*	33W	2841 lm	2700K
		2884 lm	3000K
		3013 lm	4000K
2352 mm**	66W	5682 lm	2700K
		5769 lm	3000K
		6027 lm	4000K


Code
AQ416. 01/04 15/18/20
AQ410. 01/04 15/18/20
AQ411. 01/04 15/18/20
AQ417. 01/04 15/18/20
AQ412. 01/04 15/18/20
AQ413. 01/04 15/18/20



Linear direct and indirect emission elements

Length	W	Flux	CCT
1176 mm**	33W direct	2841 lm direct	2700K
		1502 lm indirect	
	16W indirect	2884 lm direct	3000K
		1524 lm indirect	
		3013 lm direct	4000K
2352 mm***	66W direct	5682 lm direct	2700K
		3004 lm indirect	
	32W indirect	5769 lm direct	3000K
		3049 lm indirect	
		6027 lm direct	4000K
3185 lm indirect			


Code
AQ464. 01/04 15/18/20
AQ460. 01/04 15/18/20
AQ461. 01/04 15/18/20
AQ465. 01/04 15/18/20
AQ462. 01/04 15/18/20
AQ463. 01/04 15/18/20



90° angle direct emission elements

	W	Flux	CCT
90° on same plane angle elements	16W	1420 lm	2700K
301 x 301 mm*		1442 lm	3000K
		1506 lm	4000K


Code
AQ418. 01/04 15/18/20
AQ414. 01/04 15/18/20
AQ415. 01/04 15/18/20



Curved direct emission elements

Radius	Alpha	W	Flux	CCT
561 mm*	60°	16W	1347 lm	2700K
			1367 lm	3000K
			1429 lm	4000K
90°	24W	2020 lm	2700K	
			2051 lm	3000K
			2143 lm	4000K
750 mm*	45°	16W	1347 lm	2700K
			1367 lm	3000K
			1429 lm	4000K
90°	33W	2694 lm	2700K	
			2735 lm	3000K
			2857 lm	4000K

Code
AQ707. 01/04 15/18/20
AQ701. 01/04 15/18/20
AQ702. 01/04 15/18/20
AQ717. 01/04 15/18/20
AQ711. 01/04 15/18/20
AQ712. 01/04 15/18/20
AQ727. 01/04 15/18/20
AQ721. 01/04 15/18/20
AQ722. 01/04 15/18/20
AQ737. 01/04 15/18/20
AQ731. 01/04 15/18/20
AQ732. 01/04 15/18/20

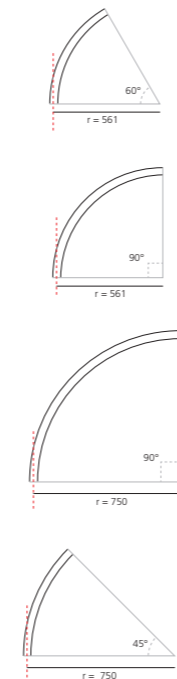

Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.
1 suspension cable is also included.
End caps have to be ordered separately.
Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Accessories

	Code
Insulating spacer (1 pcs) between modules powered by different power supplies	AQ452. 01/04 15/18/20
End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20
Transition joint use between different typology modules (track-diffusing-sharping)	AQ494. 01/04 15/18/20
Opal diffusing screen 10m 25m 50m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700
Flexible opal diffusing screen 5m 10m 25m 50m	AQ90300 AQ90000 AQ90100 AQ90200 AQ49500
Auxiliary suspension cable (1 pcs) to be used for S-configuration	

Power supply Accessory


	Code
4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
Power cable, 2x0.75 + 2x0.35, mm ² , white, 10m (to realize customized power cables)	AQ90600
Power cable, 2x0.75 + 2x0.35, mm ² , white, 50m (to realize customized power cables)	AQ90700
Power cable, 2x0.75 + 2x0.35, mm ² , black, 10m (to realize customized power cables)	AQ90800
Power cable, 2x0.75 + 2x0.35, mm ² , black, 50m (to realize customized power cables)	AQ90900

Power supply

	Undimmable
240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ174. 01/04
240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ171. 01/04
150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ176. 01/04
240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000
150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100

	Dimmable DALI / APP
240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ154. 01/04 AQ154. 01/04 APP
240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ161. 01/04 AQ161. 01/04 APP
150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ175. 01/04 AQ175. 01/04 APP
DALI to DALI-Selv Interface 103x67x21H	AQ18200
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 313x243x57,5H	AQ16000 AQ16000APP

↪ A.24 CEILING - WALL DIFFUSED EMISSION

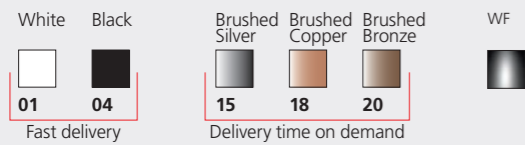

*Uses 1 DALI address
** Uses 2 DALI addresses

MacAdam 2SDCM
Life L80 (10K)>55000h
CRI = 80

IP20

Linear direct emission elements

Length	W	Flux	CCT
1176 mm*	33W	2841 lm	2700K
		2884 lm	3000K
		3013 lm	4000K
2352 mm**	66W	5682 lm	2700K
		5769 lm	3000K
		6027 lm	4000K


Code
AQ370. 01/04 15/18/20
AQ310. 01/04 15/18/20
AQ311. 01/04 15/18/20
AQ371. 01/04 15/18/20
AQ312. 01/04 15/18/20
AQ313. 01/04 15/18/20



90° angle direct emission elements


	W	Flux	CCT
90° on same plane angle elements 301 x 301 mm*	16W	1420 lm	2700K
		1442 lm	3000K
		1506 lm	4000K

Code
AQ372. 01/04 15/18/20
AQ314. 01/04 15/18/20
AQ315. 01/04 15/18/20

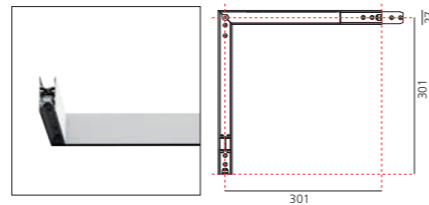

	W	Flux	CCT
90° on perpendicular planes angle elements 330 x 330 mm*	16W	1362 lm	2700K
		1383 lm	3000K
		1444 lm	4000K


Code
AQ373. 01/04 15/18/20
AQ316. 01/04 15/18/20
AQ317. 01/04 15/18/20

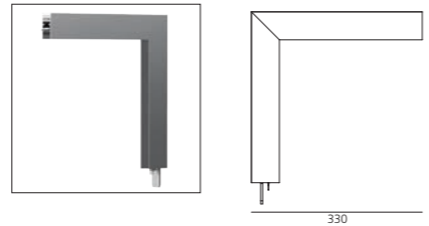

Curved direct emission elements

Radius	Alpha	W	Flux	CCT
561 mm*	60°	16W	1347 lm	2700K
			1367 lm	3000K
			1429 lm	4000K
90°	24W	2020 lm	2700K	
			2051 lm	3000K
			2143 lm	4000K
750 mm*	45°	16W	1347 lm	2700K
			1367 lm	3000K
			1429 lm	4000K
90°	33W	2694 lm	2700K	
			2735 lm	3000K
			2857 lm	4000K

Code
AQ607. 01/04 15/18/20
AQ601. 01/04 15/18/20
AQ602. 01/04 15/18/20
AQ617. 01/04 15/18/20
AQ611. 01/04 15/18/20
AQ612. 01/04 15/18/20
AQ627. 01/04 15/18/20
AQ621. 01/04 15/18/20
AQ622. 01/04 15/18/20
AQ637. 01/04 15/18/20
AQ631. 01/04 15/18/20
AQ632. 01/04 15/18/20

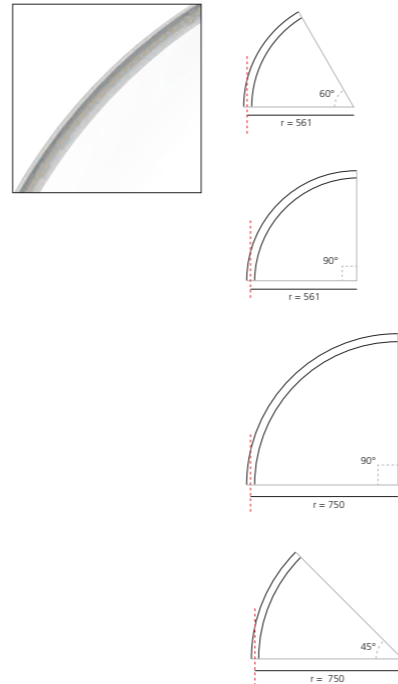

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm lenght. 2 for 2352 mm lenght.
End caps have to be ordered separately.
Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Accessories

	Code
Insulating spacer (1 pc) between modules powered by different power supplies	AQ351. 01/04 15/18/20
End cap (2 pcs)	AQ350. 01/04 15/18/20
Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20
Transition cap track - diffusing track- sharpening diffusing - sharpening	AQ394. 01/04 15/18/20

Power supply


	Code
240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ17801
240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 351x61x111H	AQ173. 01/04
150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 351x61x111H	AQ179. 01/04
240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000
150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100

Power supply Accessory

	Code
4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
Power cable, 2x0.75 + 2x0.35, mm², white, 10m (to realize customized power cables)	AQ90600
Power cable, 2x0.75 + 2x0.35, mm², white, 50m (to realize customized power cables)	AQ90700
Power cable, 2x0.75 + 2x0.35, mm², black, 10m (to realize customized power cables)	AQ90800
Power cable, 2x0.75 + 2x0.35, mm², black, 50m (to realize customized power cables)	AQ90900

	Code
Opal diffusing screen 10m 25m 50m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700
Flexible opal diffusing screen 5m 10m 25m 50m	AQ90300 AQ90000 AQ90100 AQ90200

	Code
240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ16801 AQ16801APP
240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ172. 01/04 AQ172. 01/04 APP
150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ177. 01/04 AQ177. 01/04 APP
DALI to DALI-Selv Interface 103x67x21H	AQ18200
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 313x243x57,5H	AQ16000 AQ16000APP

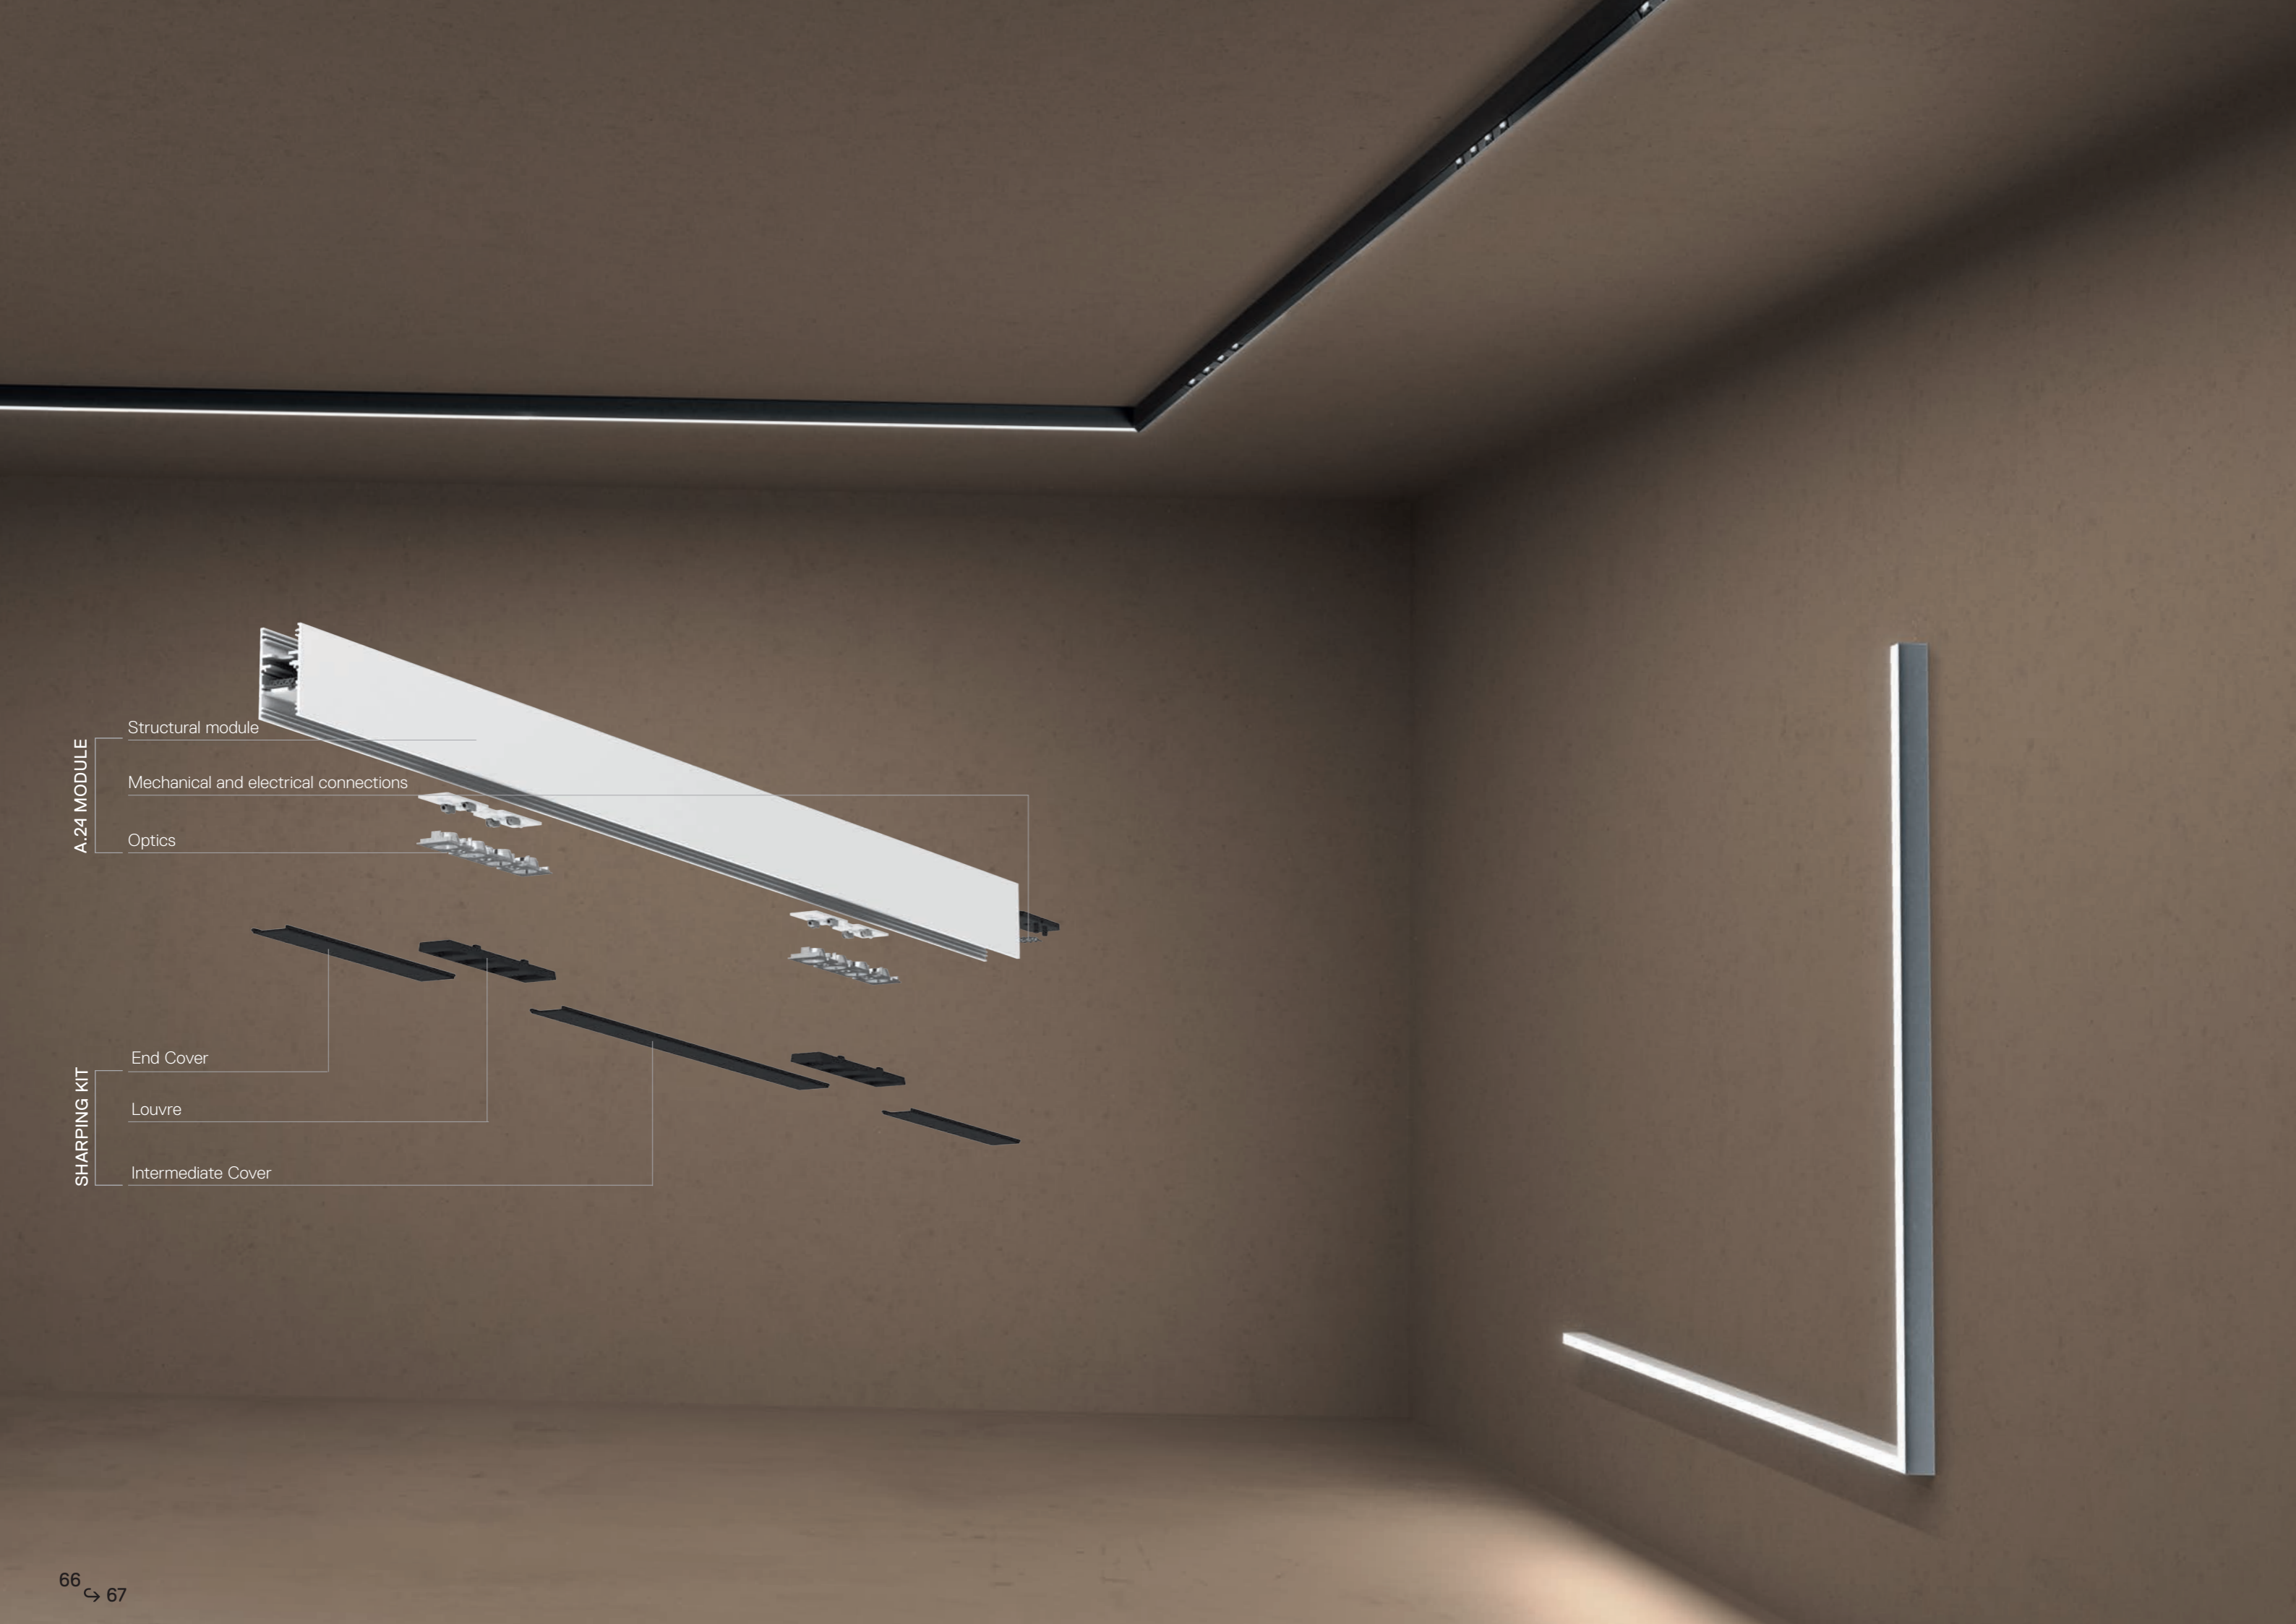

A.24 MODULE

Structural module

Mechanical and electrical connections

Optics

SHARPING KIT

End Cover

Louvre


Intermediate Cover

↪ A.24 RECESSED SHARPING EMISSION


White Black F XF *Uses 1 DALI address ** Uses 2 DALI addresses MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90 IP20

01 04


Formwork (aluminum)		
Length	Radius	Alpha
Linear 1176mm		
Linear 2352 mm		
90° angle on the same plane		
Curved	561 mm	60°
		90°
	750 mm	45°
		90°
End caps (2pcs)		

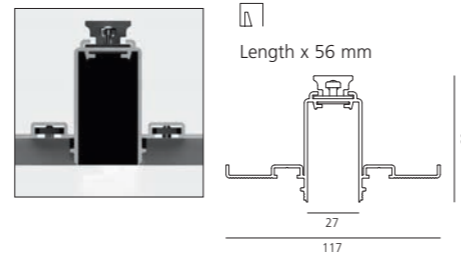


Linear direct emission elements					Code
Length	W	Beam	Flux	CCT	
1176mm*	22W	F 24°	1528 lm	2700K	AQ214. 01/04
			1628 lm	3000K	AQ210. 01/04
			1742 lm	4000K	AQ211. 01/04
			1624 lm	2700K	AQ234. 01/04
			1731 lm	3000K	AQ230. 01/04
		XF 62°	1852 lm	4000K	AQ231. 01/04
			3056 lm	2700K	AQ215. 01/04
			3256 lm	3000K	AQ212. 01/04
			3485 lm	4000K	AQ213. 01/04
			3249 lm	2700K	AQ235. 01/04
2352 mm**	45W	F 24°	3461 lm	3000K	AQ232. 01/04
			3704 lm	4000K	AQ233. 01/04
			XF62°		

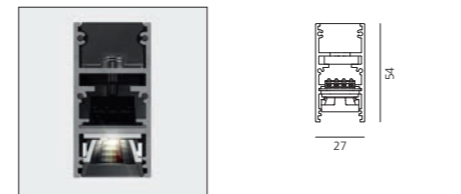

90° angle joining elements (not lit)		Code
90° recessed corner (on same plane)	301x301mm	AQ240. 01/04

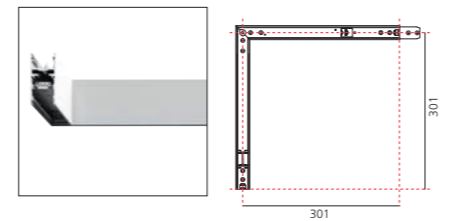

Curved direct emission elements					Code	
Radius	Alpha	W	Beam	Flux	CCT	
561 mm*	60°	12W	F 24°	764 lm	2700K	AQ508. 01/04
				814 lm	3000K	AQ503. 01/04
				871 lm	4000K	AQ505. 01/04
				812 lm	2700K	AQ509. 01/04
				865 lm	3000K	AQ504. 01/04
			XF 62°	926 lm	4000K	AQ506. 01/04
				764 lm	2700K	AQ518. 01/04
				814 lm	3000K	AQ513. 01/04
				871 lm	4000K	AQ515. 01/04
				812 lm	2700K	AQ519. 01/04
750 mm*	45°	12W	F 24°	865 lm	3000K	AQ514. 01/04
				926 lm	4000K	AQ516. 01/04
				764 lm	2700K	AQ528. 01/04
				814 lm	3000K	AQ523. 01/04
				871 lm	4000K	AQ525. 01/04
			XF 62°	812 lm	2700K	AQ529. 01/04
				865 lm	3000K	AQ524. 01/04
				926 lm	4000K	AQ526. 01/04
				1528 lm	2700K	AQ538. 01/04
				1628 lm	3000K	AQ533. 01/04
90°	25W	F 24°	1742 lm	4000K	AQ535. 01/04	
			1624 lm	2700K	AQ539. 01/04	
			1731 lm	3000K	AQ534. 01/04	
			1852 lm	4000K	AQ536. 01/04	

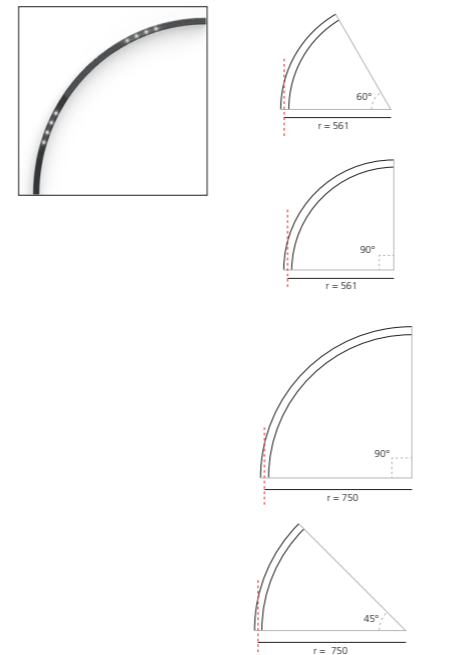

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Sharping kit (louvers and covers) has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. For the effective powers of the drivers, see the table on page. 331

Accessories	Code		Code
Insulating spacer (1 pc) between modules powered by different power supplies	AQ206. 01/04	Louver for linear elements Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) 90° angle cover (2 pcs)	AQ260. 01/04 AQ261. 01/04 AQ262. 01/04
End caps (2 pcs)	AQ250. 01/04	Louver for curved elements R=561mm/R=750mm R=561mm 60° order 1 pc 90° order 1 pc R=750mm 45° order 1 pc 90° order 2 pcs	AQ911. 01/04
Transition joint use between different typology modules (track-diffusing-sharping)	AQ290. 01/04	Flexible cover 2m Flexible cover 10m	AQ921. 01/04 AQ920. 01/04

Power supply	Code	Undimmable	Code	Dimmable DALI / APP	Code
240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ17801	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ17801	AQ16801 AQ16801APP	
240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ173. 01/04	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ173. 01/04	AQ172. 01/04 AQ172. 01/04 APP	
150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ179. 01/04	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ179. 01/04	AQ177. 01/04 AQ177. 01/04 APP	
240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	DALI to DALI-Selv Interface 103x67x21H	AQ18000	AQ18200	
150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 313x243x57,5H	AQ18100	AQ16000 AQ16000APP	

Power supply Accessory	Code
4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
Power cable, 2x0.75 + 2x0.35, mm², white, 10m (to realize customized power cables)	AQ90600
Power cable, 2x0.75 + 2x0.35, mm², white, 50m (to realize customized power cables)	AQ90700
Power cable, 2x0.75 + 2x0.35, mm², black, 10m (to realize customized power cables)	AQ90800
Power cable, 2x0.75 + 2x0.35, mm², black, 50m (to realize customized power cables)	AQ90900

↪ A.24 SUSPENSION SHARPING EMISSION

White Black Brushed Silver Brushed Copper Brushed Bronze F XF

01 04 15 18 20

Fast delivery Delivery time on demand

*Uses 1 DALI address MacAdam 2SDCM IP20
 ** Uses 2 DALI addresses Life L90 (20K) 118000h
 *** Uses 3 DALI addresses CRI = 90

Linear direct emission elements

Length	W	Beam	Flux	CCT	Code
1176 mm*	22W	F 24°	1528 lm	2700K	AQ424. 01/04
			1628 lm	3000K	AQ420. 01/04
			1742 lm	4000K	AQ421. 01/04
		XF 62°	1624 lm	2700K	AQ444. 01/04
			1731 lm	3000K	AQ440. 01/04
			1852 lm	4000K	AQ441. 01/04
2352 mm**	45W	F 24°	3056 lm	2700K	AQ425. 01/04
			3256 lm	3000K	AQ422. 01/04
			3485 lm	4000K	AQ423. 01/04
		XF 62°	3249 lm	2700K	AQ445. 01/04
			3461 lm	3000K	AQ442. 01/04
			3704 lm	4000K	AQ443. 01/04



Linear direct and indirect emission elements

Length	W	Beam	Flux	CCT	Code
1176 mm**	22W direct 16W indirect	F 24°	1528 lm direct	2700K	AQ482. 01/04
			1502 lm indirect		15/18/20
			1628 lm direct	3000K	AQ470. 01/04
		1524 lm indirect		15/18/20	
		1742 lm direct	4000K	AQ471. 01/04	
		1593 lm indirect		15/18/20	
	XF 62°	1624 lm direct	2700K	AQ486. 01/04	
		1502 lm indirect		15/18/20	
		1731 lm direct	3000K	AQ478. 01/04	
		1524 lm indirect		15/18/20	
		1858 lm direct	4000K	AQ479. 01/04	
		1593 lm indirect		15/18/20	
2352 mm***	45W indirect 32W indirect	F 24°	3056 lm direct	2700K	AQ483. 01/04
			3004 lm indirect		15/18/20
			3256 lm direct	3000K	AQ472. 01/04
		3049 lm indirect		15/18/20	
		3485 lm direct	4000K	AQ473. 01/04	
		3185 lm indirect		15/18/20	
	XF 62°	3249 lm direct	2700K	AQ487. 01/04	
		3004 lm indirect		15/18/20	
		3461 lm direct	3000K	AQ480. 01/04	
		3049 lm indirect		15/18/20	
		3704 lm direct	4000K	AQ481. 01/04	
		3185 lm indirect		15/18/20	




Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Sharping kit (louvers and covers) has to be ordered separately.

90° angle joining elements (not lit)


90° suspension corner (on same plane)
301x301mm

Code
AQ450. 01/04
15/18/20

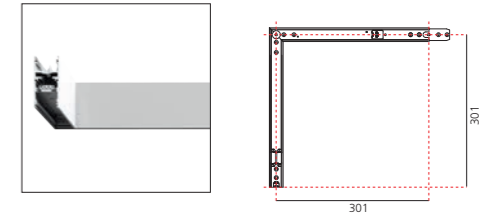









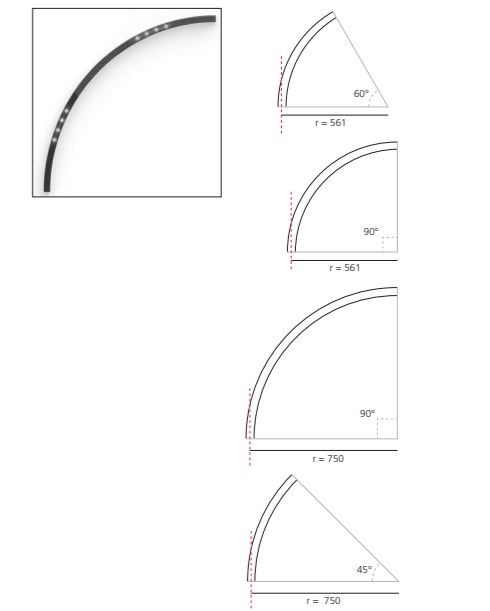




Curved direct emission elements

Radius	Alpha	W	Beam	Flux	CCT	Code
561 mm*	60°	12W	F 24°	764 lm	2700K	AQ708. 01/04
				814 lm	3000K	AQ703. 01/04
				871 lm	4000K	AQ705. 01/04
			XF 62°	812 lm	2700K	AQ709. 01/04
				865 lm	3000K	AQ704. 01/04
				926 lm	4000K	AQ706. 01/04
	90°	12W	F 24°	764 lm	2700K	AQ718. 01/04
				814 lm	3000K	AQ713. 01/04
				871 lm	4000K	AQ715. 01/04
			XF 62°	812 lm	2700K	AQ719. 01/04
				865 lm	3000K	AQ714. 01/04
				926 lm	4000K	AQ716. 01/04
750 mm*	45°	12W	F 24°	764 lm	2700K	AQ728. 01/04
				814 lm	3000K	AQ723. 01/04
				871 lm	4000K	AQ725. 01/04
			XF 62°	812 lm	2700K	AQ729. 01/04
				865 lm	3000K	AQ724. 01/04
				926 lm	4000K	AQ726. 01/04
	90°	25W	F 24°	1528 lm	2700K	AQ738. 01/04
				1628 lm	3000K	AQ733. 01/04
				1742 lm	4000K	AQ735. 01/04
			XF 62°	1624 lm	2700K	AQ739. 01/04
				1730 lm	3000K	AQ734. 01/04
				1852 lm	4000K	AQ736. 01/04



↪ A.24 SUSPENSION SHARPING EMISSION

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.
 For the effective powers of the drivers, see the table on page. 331

Accessories		Code	
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ453. 01/04 15/18/20	
	End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20	
	Transition cap track - diffusing track - sharpening diffusing - sharpening	AQ494. 01/04 15/18/20	
	Auxiliary suspension cable (1 pcs) to be used for S-configuration	AQ49500	
	Louver for linear elements Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) 90° angle cover (2 pcs)		AQ260. 01/04 AQ261. 01/04 AQ262. 01/04
	Louver for curved elements R=561mm/R=750mm R=561mm 60° order 1 pc 90° order 1 pc R=750mm 45° order 1 pc 90° order 2 pcs Flexible cover 2m Flexible cover 10m		AQ911. 01/04 AQ921. 01/04 AQ920. 01/04
Power supply		Code	
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ174. 01/04	Dimmable DALI / APP AQ154. 01/04 AQ154. 01/04 APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ171. 01/04	AQ161. 01/04 AQ161. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ176. 01/04	AQ175. 01/04 AQ175. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	AQ16000 AQ16000APP
	DALI to DALI-Selv Interface 103x67x21H		
	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 (2 feed connectors) 313x243x57,5H		
Power supply Accessory		Code	
4pcs feed connectors (for powering multiple sections with a single power kit)		AQ90500	
Power cable, 2x0.75 + 2x0.35, mm ² , white, 10m (to realize customized power cables)		AQ90600	
Power cable, 2x0.75 + 2x0.35, mm ² , white, 50m (to realize customized power cables)		AQ90700	
Power cable, 2x0.75 + 2x0.35, mm ² , black, 10m (to realize customized power cables)		AQ90800	
Power cable, 2x0.75 + 2x0.35, mm ² , black, 50m (to realize customized power cables)		AQ90900	



↪ A.24 CEILING SHARPING EMISSION

White Black Brushed Silver Brushed Copper Brushed Bronze F XF

01 04 15 18 20

Fast delivery Delivery time on demand

*Uses 1 DALI address MacAdam 2SDCM IP20
 ** Uses 2 DALI addresses Life L90 (20K) 118000h
 CRI = 90

Linear direct emission elements

Length	W	CRI	Beam	Flux	CCT
1176 mm*	22W	90	F 24°	1528 lm	2700K
				1628 lm	3000K
				1742 lm	4000K
			XF 62°	1624 lm	2700K
				1731 lm	3000K
				1852 lm	4000K
				3256 lm	3000K
				3485 lm	4000K
				3704 lm	4000K
2352 mm**	45W	90	F 24°	3056 lm	2700K
				3256 lm	3000K
				3485 lm	4000K
			XF 62°	3249 lm	2700K
				3461 lm	3000K
				3704 lm	4000K


Code
AQ324. 01/04 15/18/20
AQ320. 01/04 15/18/20
AQ321. 01/04 15/18/20
AQ344. 01/04 15/18/20
AQ340. 01/04 15/18/20
AQ341. 01/04 15/18/20
AQ325. 01/04 15/18/20
AQ322. 01/04 15/18/20
AQ323. 01/04 15/18/20
AQ345. 01/04 15/18/20
AQ342. 01/04 15/18/20
AQ343. 01/04 15/18/20



90° angle joining elements (not lit)

90° ceiling corner (on same plane)
301x301mm

Code
AQ360. 01/04 15/18/20

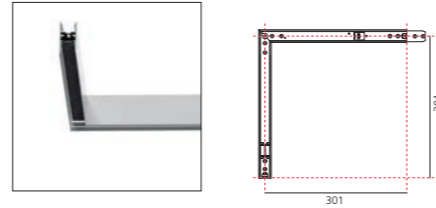


Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length.
End caps have to be ordered separately.
Sharping kit (louvers and covers) has to be ordered separately.

Curved direct emission elements





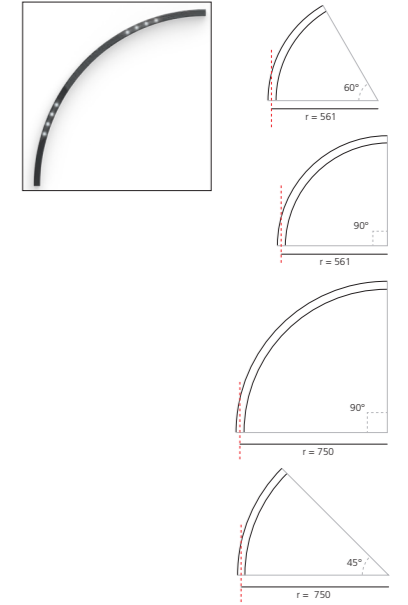











Radius	Alpha	W	CRI	Beam	Flux	CCT
561 mm*	60°	12W	90	F 24°	764 lm	2700K
					814 lm	3000K
					871 lm	4000K
				XF 62°	812 lm	2700K
					865 lm	3000K
					926 lm	4000K
	90°	12W	90	F 24°	764 lm	2700K
					814 lm	3000K
					871 lm	4000K
				XF 62°	812 lm	2700K
					865 lm	3000K
					926 lm	4000K
750 mm*	45°	12W	90	F 24°	764 lm	2700K
					814 lm	3000K
					871 lm	4000K
				XF 62°	812 lm	2700K
					865 lm	3000K
					926 lm	4000K
	90°	25W	90	F 24°	1528 lm	2700K
					1628 lm	3000K
					1742 lm	4000K
				XF 62°	1624 lm	2700K
					1730 lm	3000K
					1852 lm	4000K

Code
AQ608. 01/04 15/18/20
AQ603. 01/04 15/18/20
AQ605. 01/04 15/18/20
AQ609. 01/04 15/18/20
AQ604. 01/04 15/18/20
AQ606. 01/04 15/18/20
AQ618. 01/04 15/18/20
AQ613. 01/04 15/18/20
AQ615. 01/04 15/18/20
AQ619. 01/04 15/18/20
AQ614. 01/04 15/18/20
AQ616. 01/04 15/18/20
AQ628. 01/04 15/18/20
AQ623. 01/04 15/18/20
AQ625. 01/04 15/18/20
AQ629. 01/04 15/18/20
AQ624. 01/04 15/18/20
AQ626. 01/04 15/18/20
AQ638. 01/04 15/18/20
AQ633. 01/04 15/18/20
AQ635. 01/04 15/18/20
AQ639. 01/04 15/18/20
AQ634. 01/04 15/18/20
AQ636. 01/04 15/18/20



↪ A.24 CEILING SHARPING EMISSION

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm lenght - 2 for 2352 mm lenght.
 End caps have to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.
 For the effective powers of the drivers, see the table on page. 331

Accessories		Code			Code
	Insulating spacer (1 pcs) between modules powered by differents power supply	AQ352. 01/04 15/18/20		Louvers for linear elements Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) 90° angle cover (2 pcs)	AQ260. 01/04 AQ261. 01/04 AQ262. 01/04
	End caps (2 pcs)	AQ350. 01/04 15/18/20		Louvers for curved elements R=561mm/R=750mm R=561mm 60° order 1 pc 90° order 1 pc R=750mm 45° order 1 pc 90° order 2 pcs	AQ911. 01/04 AQ921. 01/04 AQ920. 01/04
	Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20			
	Transition cap track - diffusing track- sharpening diffusing - sharpening	AQ394. 01/04 15/18/20			
Power supply		Undimmable			Dimmable DALI / APP
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 396x195x112H	AQ17801		240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 396x195x112H	AQ16801 AQ16801APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H	AQ173. 01/04		240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 321x91x111H	AQ172. 01/04 AQ172. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H	AQ179. 01/04		150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 321x91x111H	AQ177. 01/04 AQ177. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000		DALI to DALI-Selv Interface 103x67x21H	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (1 feed connector) (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100		240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5H	AQ16000 AQ16000APP
Power supply Accessory		Code			
4pcs feed connectors (for powering multiple sections with a single power kit)		AQ90500			
Power cable, 2x0.75 + 2x0.35, mm², white, 10m (to realize customized power cables)		AQ90600			
Power cable, 2x0.75 + 2x0.35, mm², white, 50m (to realize customized power cables)		AQ90700			
Power cable, 2x0.75 + 2x0.35, mm², black, 10m (to realize customized power cables)		AQ90800			
Power cable, 2x0.75 + 2x0.35, mm², black, 50m (to realize customized power cables)		AQ90900			





A.24

↳ Configurator

Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.


For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.

A.24 Configurator is useful tool to simplify the design of your composition.



After defining the layout of the space, the desired system can be created by reconstructing it with a practical drag and drop of the various modules available. Once the project is completed, the system returns a complete datasheet with all the details to proceed with the order.

→ [artemide.com/en/configurator](https://www.artemide.com/en/configurator)


1. Build your space

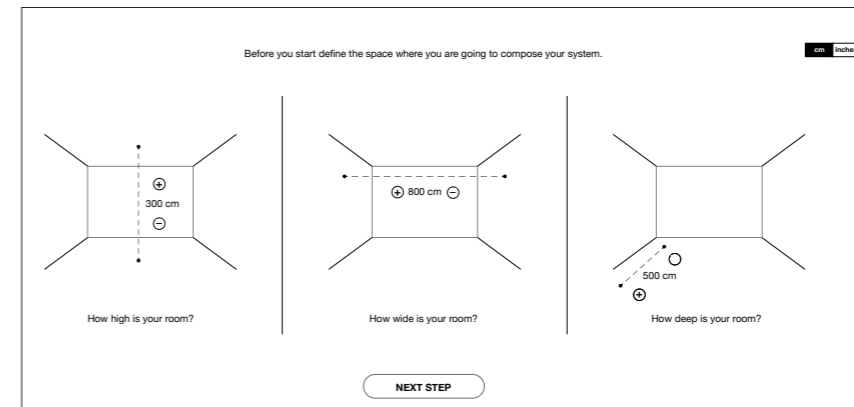

2. Drag and drop

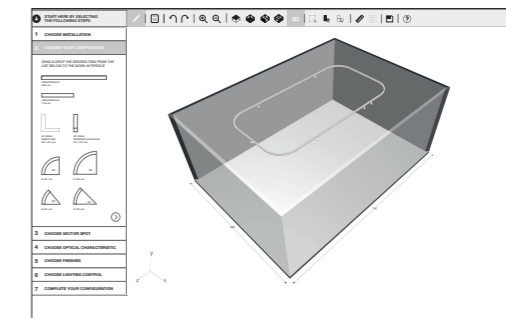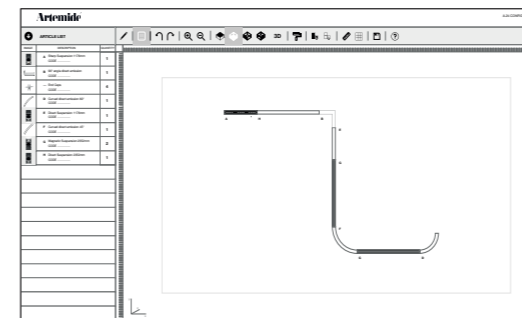

3. Save it!

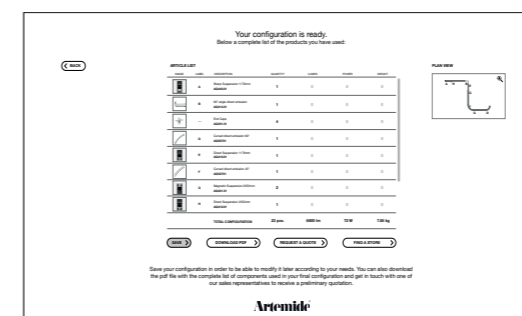



A.24 circular
↪ Stand-alone






↪ A.24 STAND-ALONE CIRCULAR - DIFFUSED EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	220/240Vac 50/60Hz electronic ballast included	MacAdam 2SDCM Life L80 (10K)>55000h CRI = 80 Uses 1 DALI addresses.	IP20
------------------------------	-------------	---	----------------------	----------------------	--	--	------

RECESSED


Direct emission				Dimmable DALI		APP	
Ø	W	Flux	CCT	Code		Code	
1122 mm	102W	8082 lm	2700K	AQ54401		AQ54401APP	
		8204 lm	3000K	AQ54001		AQ54001APP	
		8572 lm	4000K	AQ54101		AQ54101APP	
1500 mm	136W	10776 lm	2700K	AQ55401		AQ55401APP	
		10939 lm	3000K	AQ55001		AQ55001APP	
		11429 lm	4000K	AQ55101		AQ55101APP	

Formwork (aluminum) included



SUSPENSION

Direct emission				Dimmable DALI		APP	
Ø	W	Flux	CCT	Code		Code	
1122 mm	102W	8082 lm	2700K	AQ744. 01/04		AQ744. 01/04	APP
				15/18/20		15/18/20	APP
		8204 lm	3000K	AQ740. 01/04		AQ740. 01/04	APP
				15/18/20		15/18/20	APP
		8572 lm	4000K	AQ741. 01/04		AQ741. 01/04	APP
				15/18/20		15/18/20	APP
1500 mm	136W	10776 lm	2700K	AQ754. 01/04		AQ754. 01/04	APP
				15/18/20		15/18/20	APP
		10939 lm	3000K	AQ750. 01/04		AQ750. 01/04	APP
				15/18/20		15/18/20	APP
		11429 lm	4000K	AQ751. 01/04		AQ751. 01/04	APP
				15/18/20		15/18/20	APP



Ø1122 / 1500

CEILING

Direct emission				Dimmable DALI		APP	
Ø	W	Flux	CCT	Code		Code	
1122 mm	102W	8082 lm	2700K	AQ644. 01/04		AQ644. 01/04	APP
				15/18/20		15/18/20	APP
		8204 lm	3000K	AQ640. 01/04		AQ640. 01/04	APP
				15/18/20		15/18/20	APP
		8572 lm	4000K	AQ641. 01/04		AQ641. 01/04	APP
				15/18/20		15/18/20	APP
1550 mm	136W	10776 lm	2700K	AQ654. 01/04		AQ654. 01/04	APP
				15/18/20		15/18/20	APP
		10939 lm	3000K	AQ650. 01/04		AQ650. 01/04	APP
				15/18/20		15/18/20	APP
		11429 lm	4000K	AQ651. 01/04		AQ651. 01/04	APP
				15/18/20		15/18/20	APP

Accessories

Trimless frame to be used for recessing the power kit
For suspension Stand-alone Ø 1122 and Ø 1500
For ceiling Stand-alone Ø 1122 and Ø 1500

Code
AQ94000
AQ94200



↪ A.24 STAND-ALONE CIRCULAR - SHARPING EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	RWF 220/240Vac 50/60Hz electronic ballast included Sharping kit has to be ordered separately.	MacAdam 2SDCM Life L70 (6K) 50000h *Uses 1 DALI address ** Uses 2 DALI addresses	IP20
------------------------------	-------------	---	----------------------	----------------------	---	---	------

RECESSED

Direct emission						Dimmable DALI		APP	
Ø	W	CRI	Beam	Flux	CCT	Code		Code	
1122 mm*	42W	90	F 24°	3056 lm	2700K	AQ545. 01/04		AQ545. 01/04	APP
				3256 lm	3000K	AQ542. 01/04		AQ542. 01/04	APP
				3485 lm	4000K	AQ543. 01/04		AQ543. 01/04	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	AQ555. 01/04		AQ555. 01/04	APP
				6512 lm	3000K	AQ552. 01/04		AQ552. 01/04	APP
				6969 lm	4000K	AQ553. 01/04		AQ553. 01/04	APP

Formwork (aluminum) included


SUSPENSION

Direct emission						Dimmable DALI		APP	
Ø	W	CRI	Beam	Flux	CCT	Code		Code	
1122 mm*	42W	90	F 24°	3056 lm	2700K	AQ745. 01/04		AQ745. 01/04	APP
				3256 lm	3000K	15/18/20		15/18/20	APP
				3485 lm	4000K	AQ742. 01/04		AQ742. 01/04	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	15/18/20		15/18/20	APP
				6512 lm	3000K	AQ743. 01/04		AQ743. 01/04	APP
				6969 lm	4000K	15/18/20		15/18/20	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	AQ755. 01/04		AQ755. 01/04	APP
				6512 lm	3000K	15/18/20		15/18/20	APP
				6969 lm	4000K	AQ752. 01/04		AQ752. 01/04	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	15/18/20		15/18/20	APP
				6512 lm	3000K	AQ753. 01/04		AQ753. 01/04	APP
				6969 lm	4000K	15/18/20		15/18/20	APP

CEILING

Direct emission						Dimmable DALI		APP	
Ø	W	CRI	Beam	Flux	CCT	Code		Code	
1122 mm*	42W	90	F 24°	3056 lm	2700K	AQ645. 01/04		AQ645. 01/04	APP
				3256 lm	3000K	15/18/20		15/18/20	APP
				3485 lm	4000K	AQ642. 01/04		AQ642. 01/04	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	15/18/20		15/18/20	APP
				6512 lm	3000K	AQ643. 01/04		AQ643. 01/04	APP
				6969 lm	4000K	15/18/20		15/18/20	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	AQ655. 01/04		AQ655. 01/04	APP
				6512 lm	3000K	15/18/20		15/18/20	APP
				6969 lm	4000K	AQ652. 01/04		AQ652. 01/04	APP
1500 mm**	83W	90	F 24°	6112 lm	2700K	15/18/20		15/18/20	APP
				6512 lm	3000K	AQ653. 01/04		AQ653. 01/04	APP
				6969 lm	4000K	15/18/20		15/18/20	APP

Sharping accessories






Sharping kit R=561mm
(4 louvers - 4 covers)
Sharping kit R=750mm
(8 louvers - 8 covers)

Code
AQ930. 01/04
AQ931. 01/04

Accessories

Trimless frame to be used for recessing the power kit
For suspension Stand-alone Ø 1122 and Ø 1500
For ceiling Stand-alone Ø 1122 and Ø 1500

Code
AQ94000
AQ94200



A.24 is compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.



Available on the
App Store



Get it on
Google play



Download Artemide App
and find more information on
artemide.com

Headquarters

Artemide S.p.A.
Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Communication and Marketing Department

Via Canova, 34
20145 Milan (MI), Italy
Tel. +39 02.349611
marketing@artemide.com
artemide.com

Artemide S.p.A.
si riserva la facoltà di modificare, in qualunque
momento e senza preavviso, le caratteristiche
tecniche degli elementi illustrati nel presente
catalogo.

Artemide S.p.A.
reserves the right to change, at any time and wi-
thout prior warning, the technical specifications
of any product illustrated in this catalogue.

Artemide S.p.A.
se réserve le droit de modifier, à n'importe
quel moment et sans préavis, les caractéristiques
techniques des éléments illustrés dans ce
catalogue.

Artemide S.p.A.
behält sich das Recht vor jederzeit und ohne
Ankündigung die technischen Daten der im
Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.
se reserva la facultad de modificar, en cualquier
y sin aviso previo, las características técnicas
de los elementos ilustrados en el presente
catálogo.



ISO 9001:2015



ISO 14001:2015



ISO 45001:2018