



# Novelties 2024



**Nowodvorski**  
LIGHTING



**Nowodvorski**  
LIGHTING

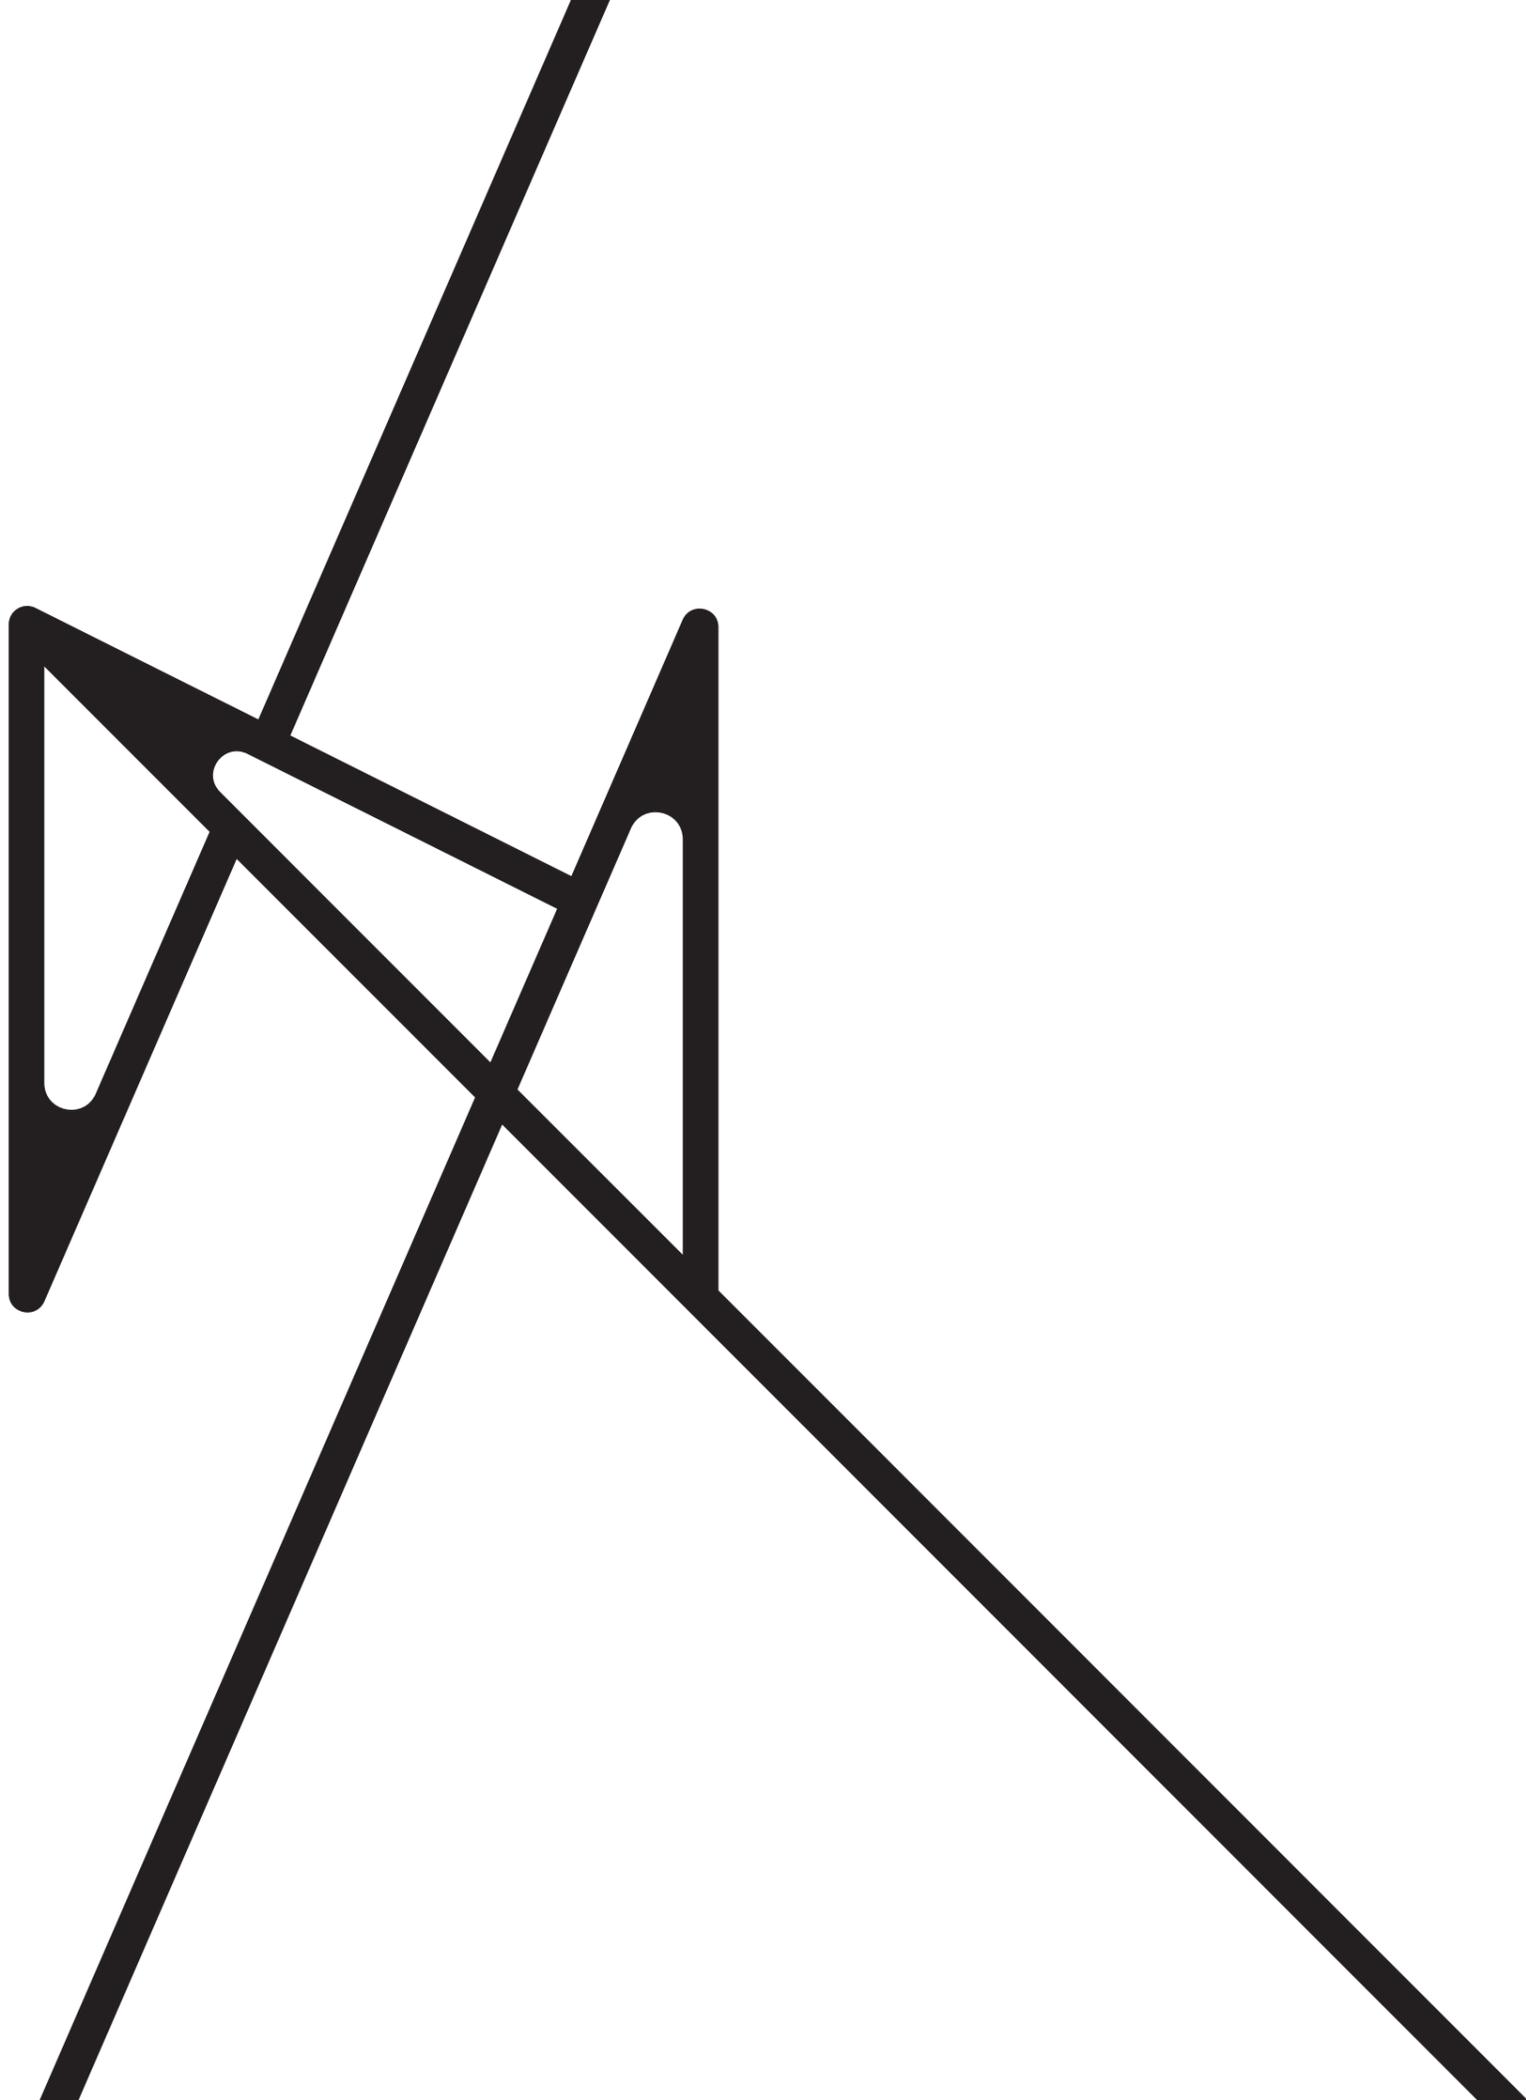

**Novelties**  
2024



DROPS WOOD C  
11175

DROPS WOOD D  
11176

DROPS WOOD C  
11175



DROPS WOOD C  
plywood, painted steel

■ 11175

⚡ 1xE27, max 25W only LED



DROPS WOOD D  
plywood, painted steel

■ 11176

⚡ 1xE27, max 25W only LED



DROPS WOOD E  
plywood, painted steel

■ 11177

⚡ 1xE27, max 25W only LED



DROPS WOOD E  
11177



DROPS WOOD F  
plywood, painted steel

■ 11180

⚡ 1xE27, max 25W only LED




DROPS WOOD F  
11180



DROPS WOOD A  
11173



DROPS WOOD B  
11174

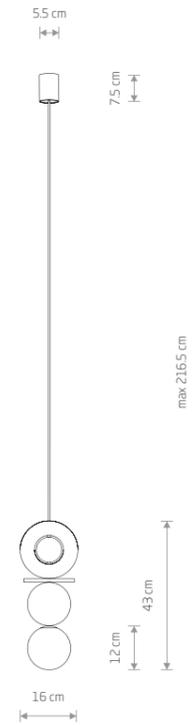


**DROPS WOOD A**  
plywood, glass, painted steel

11173

1xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K

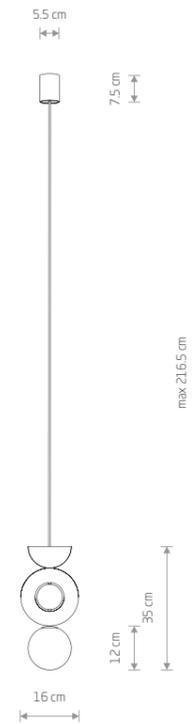

**DROPS WOOD B**  
plywood, glass, painted steel

11174

1xG9, max 12W only LED

BULB LED G9, 4W


7503 3000K 7504 4000K

DROPS WOOD A  
11173







**RING TIMBER LED M**  
11290

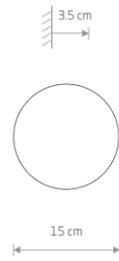

**RING TIMBER LED S**  
plywood, painted steel  
11288

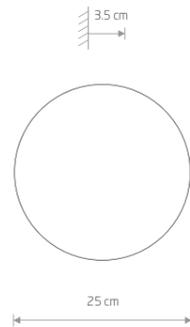


**RING TIMBER LED M**  
plywood, painted steel  
11290

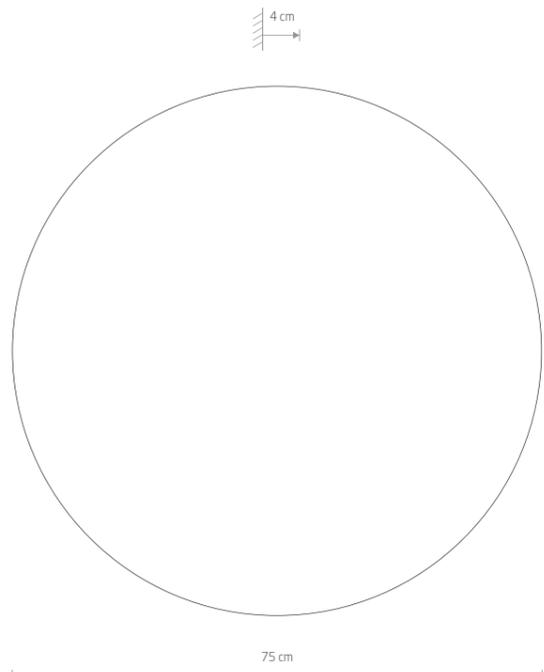


**RING TIMBER LED XXL**  
plywood, painted aluminum, painted steel

11178

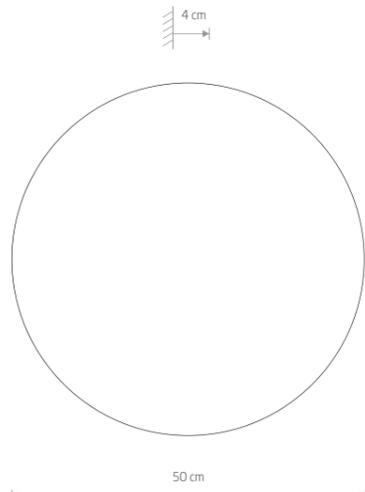

**RING TIMBER LED XL**  
plywood, painted steel

11292

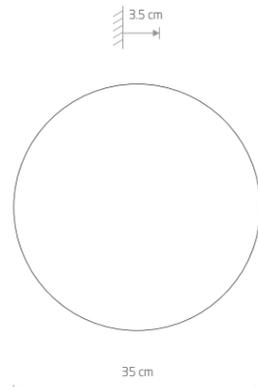

**RING TIMBER LED L**  
plywood, painted steel

11291

DARK WOOD



**RING TIMBER LED XXL**  
11178

Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11288	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11290	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11291	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11292	16W LED	3000K	290 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11178	22W LED	3000K	400 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h



RATTAN L  
11155

RATTAN M  
11154



RATTAN L  
11155



RATTAN S  
1113



RATTAN M  
11154




PUKET L  
11162



PUKET M  
11161



PUKET S  
11160

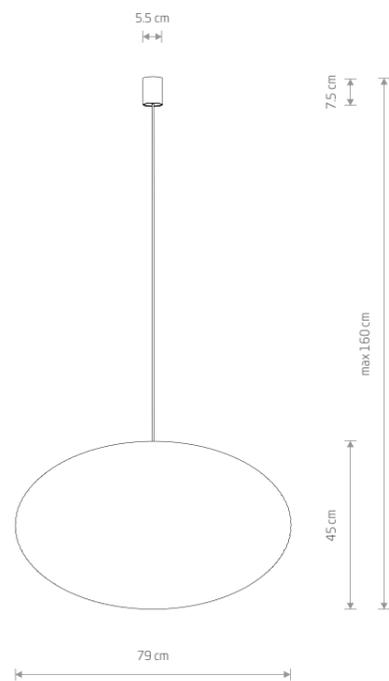


RATTAN L

rattan, painted steel

11155

1xE27, max 25W only LED

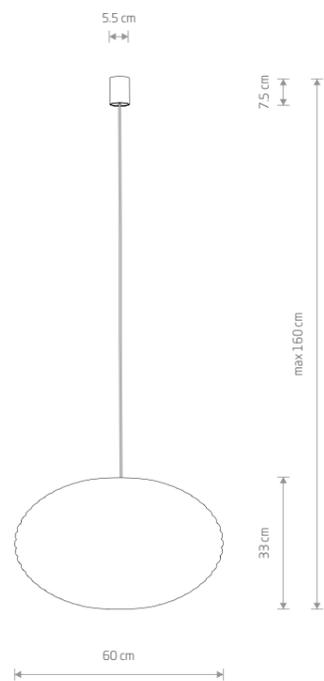

RATTAN M

rattan, painted steel

11154

1xE27, max 25W only LED




RATTAN S

rattan, painted steel

11153

1xE27, max 25W only LED

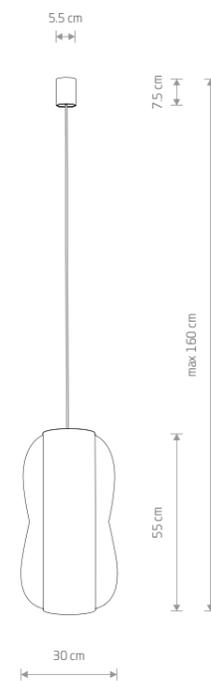


PUKET L

bamboo, painted steel

11162

1xE27, max 25W only LED

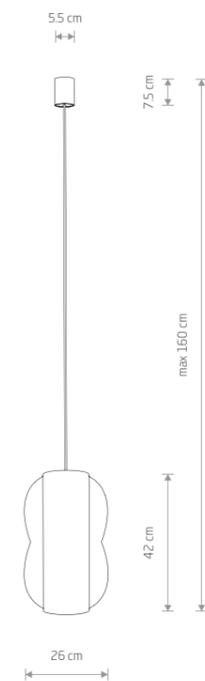


PUKET M

bamboo, painted steel

11161

1xE27, max 25W only LED

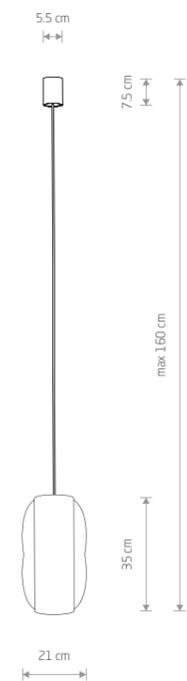

PUKET S

bamboo, painted steel

11160

1xE27, max 25W only LED

NATURAL WOOD WHITE P004 RAL 9003

NATURAL WOOD WHITE P004 RAL 9003



BOHO M  
11151



BOHO S  
11150




BOHO S

rattan, painted steel

11150

1x E27, max 25W only LED

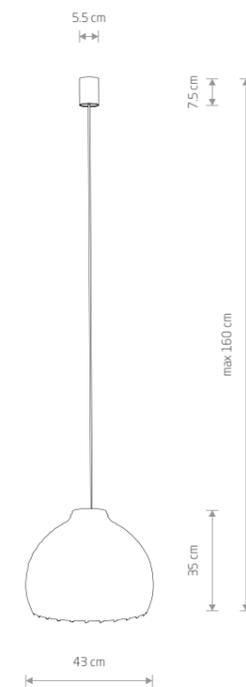


BOHO M

rattan, painted steel

11151

1x E27, max 25W only LED

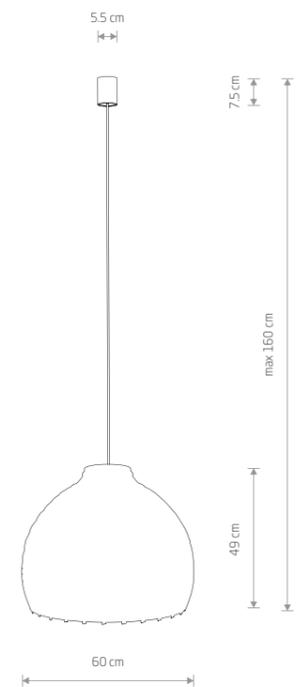

BOHO L

rattan, painted steel

11152

1x E27, max 25W only LED

NATURAL WOOD WHITE P004 RAL 9003

HAITI M  
11164



HAITI M  
11164






HAITI S  
11166




HAITI L  
11168

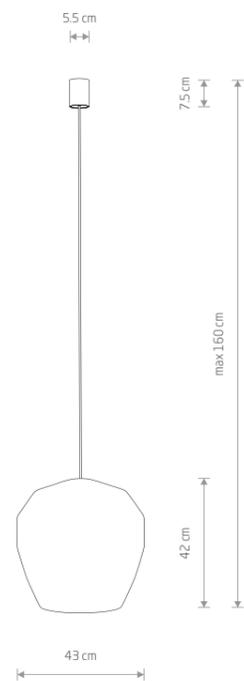


**HAITI S**  
bamboo, painted steel  
11163 ■ 11166

1x E27, max 25W only LED

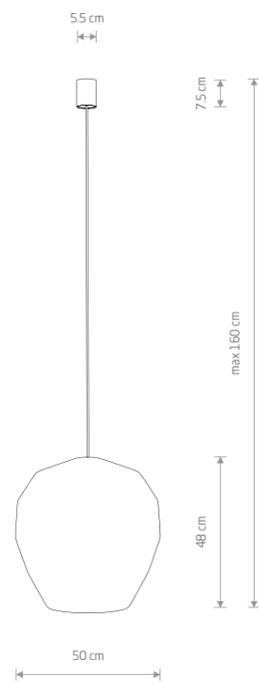

**HAITI M**  
bamboo, painted steel  
11164 ■ 11167

1x E27, max 25W only LED

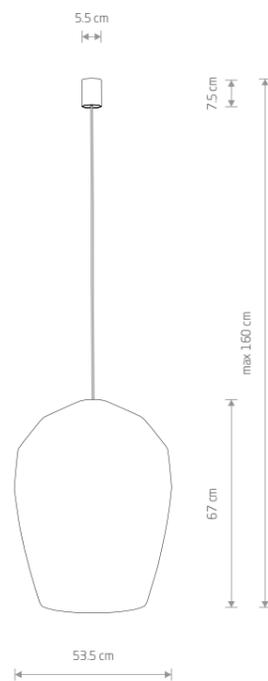

**HAITI L**  
bamboo, painted steel  
11165 ■ 11168

1x E27, max 25W only LED


■ NATURAL WOOD ■ WHITE P004 RAL 9003 ■ BLACK P013 RAL 9005



HAITI S  
11166




HAVANA S  
11170

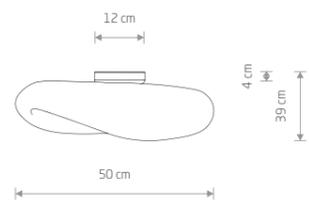

**HAVANA S**  
bamboo, painted steel, plastic ABS

11170


1x E27, max 25W only LED

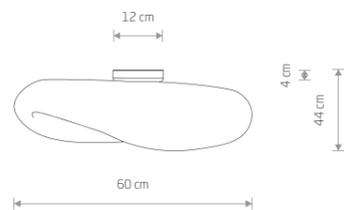

**HAVANA M**  
bamboo, painted steel, plastic ABS

11171

1x E27, max 25W only LED

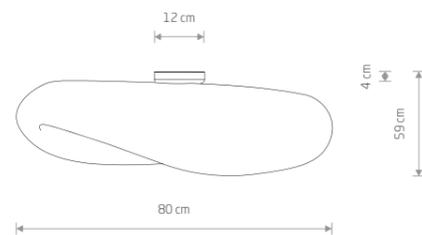

**HAVANA L**  
bamboo, painted steel, plastic ABS


11172

1x E27, max 25W only LED

NATURAL WOOD WHITE P003 RAL 9003




HAVANA M  
11396

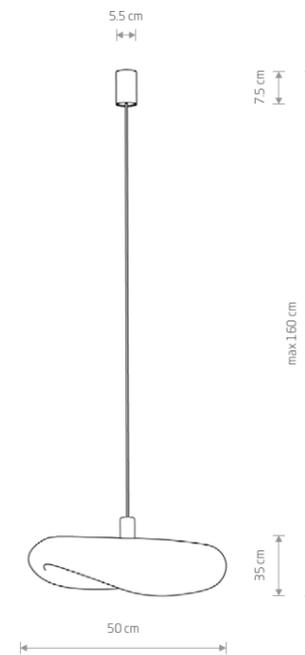

**HAVANA S**  
bamboo, painted steel

11395


1x E27, max 25W only LED

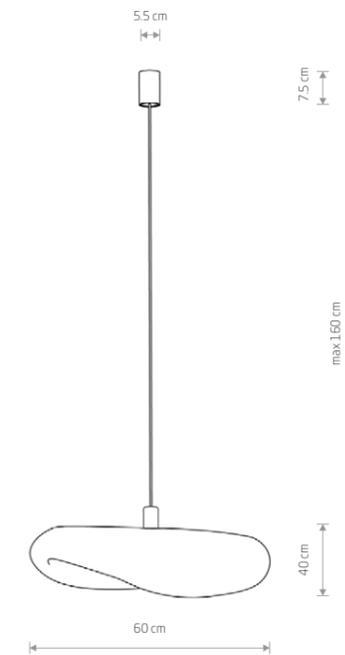

**HAVANA M**  
bamboo, painted steel

11396

1x E27, max 25W only LED

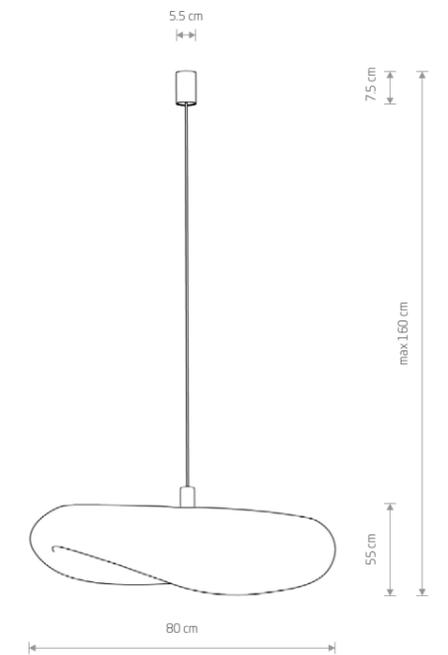


**HAVANA L**  
bamboo, painted steel

11397

1x E27, max 25W only LED

NATURAL WOOD WHITE P003 RAL 9003


JAPANDI S  
11156

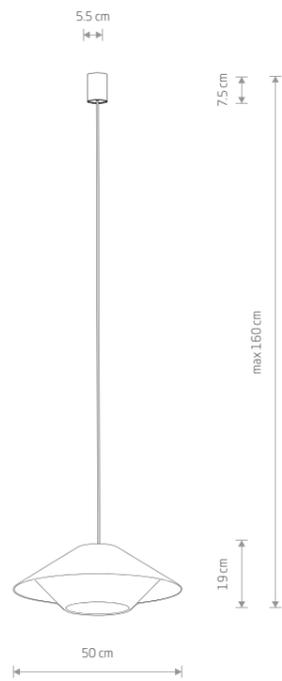

JAPANDI S  
paper rope, painted steel

11156

1xE27, max 25W only LED

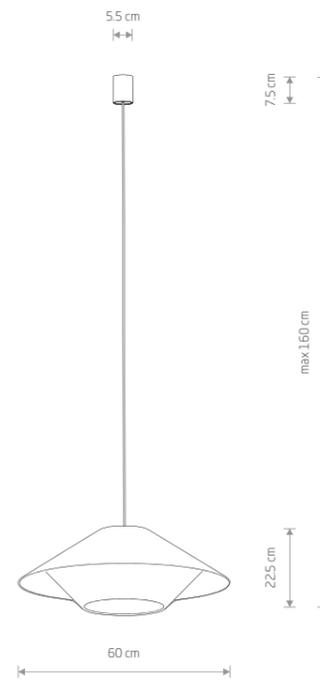

JAPANDI M  
paper rope, painted steel

11157

1xE27, max 25W only LED




JAPANDI M  
11157



KRABI  
11158



KRABI  
11158

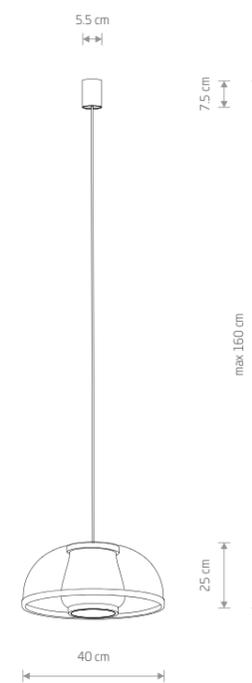

### KRABI

bamboo, painted steel

11158

1xE27, max 25W only LED

NATURAL WOOD WHITE P004 RAL 9003

PUMPKIN M  
11245

PUMPKIN S  
11243



PUMPKIN S  
11242




PUMPKIN S

■ painted steel

■ 11242 ■ 11243

● 1xGU10, max 10W only LED

PUMPKIN L  
11252

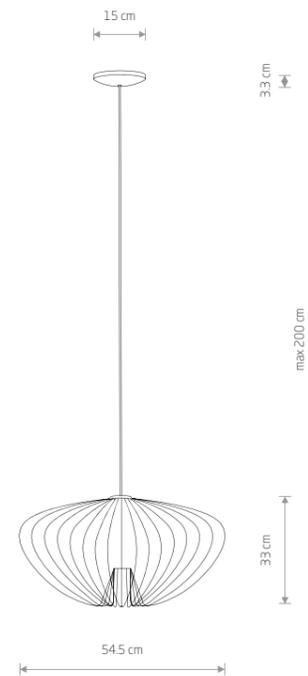


PUMPKIN M

■ painted steel

■ 11244 ■ 11245

● 1xGU10, max 10W only LED

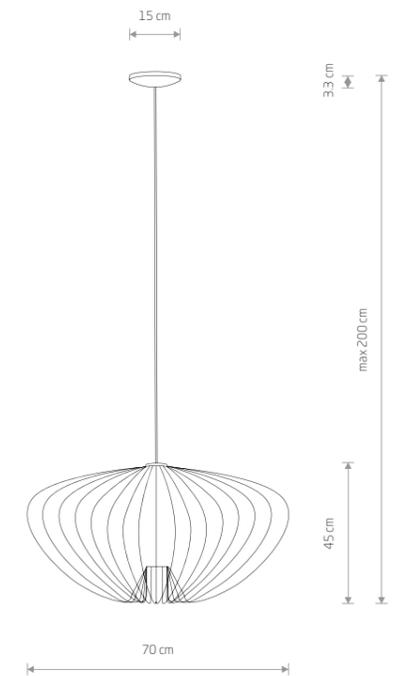

PUMPKIN L

■ painted steel

■ 11251 ■ 11252

● 1xGU10, max 10W only LED


BAR LED M  
11400

CIRCOLO LED M  
11403

SABER LED L  
11381



CIRCOLO LED M  
11402

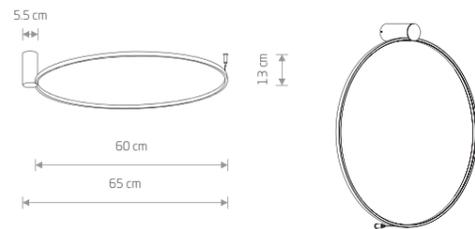


CIRCOLO LED M  
painted aluminum, plastic PC



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11402	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h



CIRCOLO LED  
11398


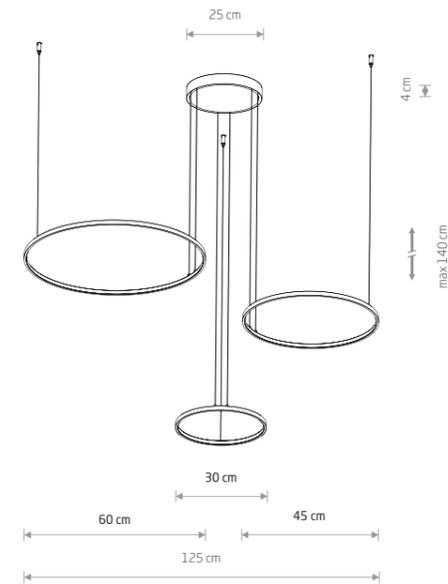


CIRCOLO LED  
painted aluminum, painted steel, plastic PC



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11398	45W LED	3000K	1600 lm	70°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h

CIRCOLO LED M  
11403

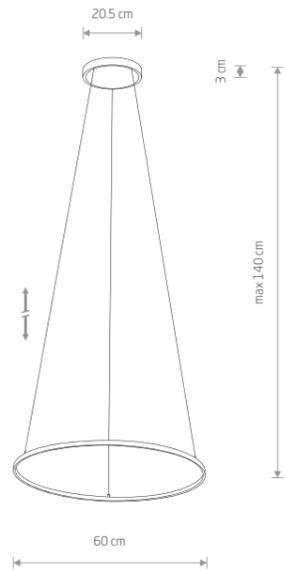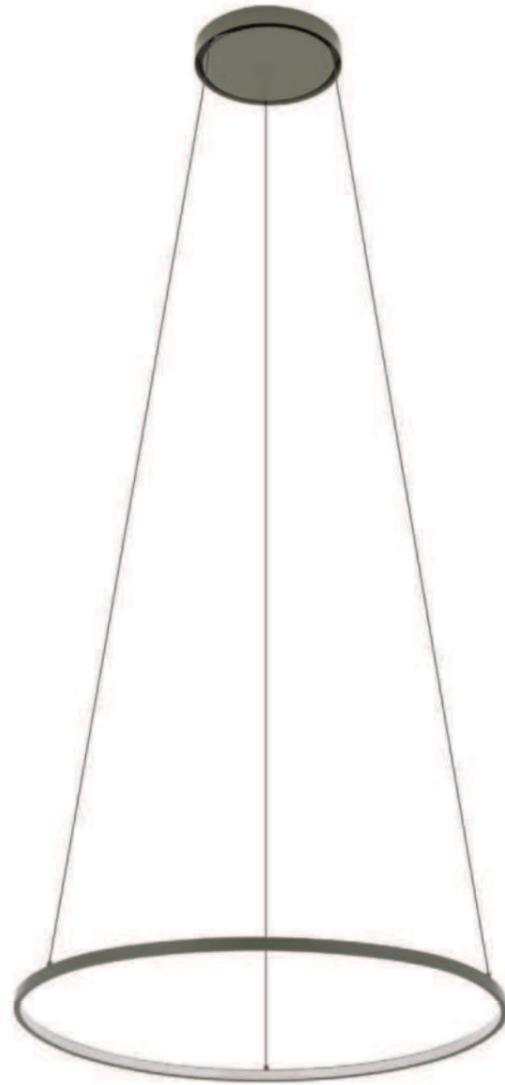


CIRCOLO LED M

■ painted aluminum, painted steel, plastic PC


■ 11403



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11403	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h

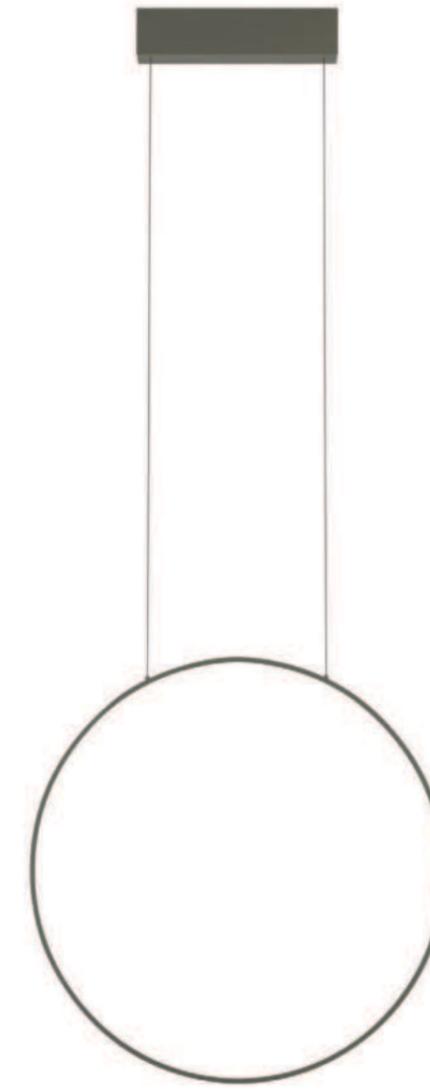

CIRCOLO LED M  
11401

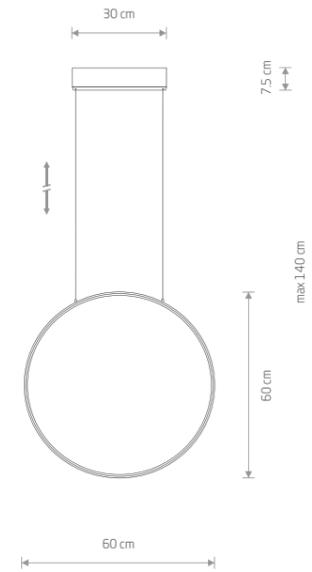

CIRCOLO LED M


■ painted aluminum, painted steel, plastic PC

■ 11401



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11401	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h

BAR LED M  
11400

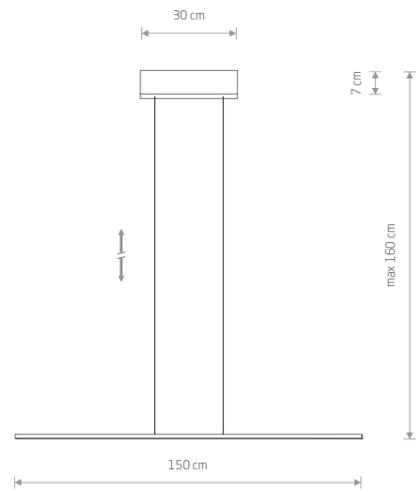

BAR LED M


■ painted aluminum, painted steel, plastic PMMA

■ 11400



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11400	24W LED	3000K	1150 lm	100°	>80	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h

SABER LED M  
11378

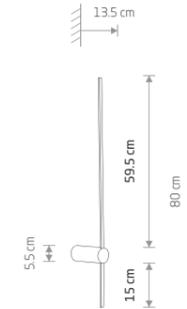


SABER LED M

■ painted aluminum, painted steel, plastic PC

■ 11378 3000K ■ 11380 4000K



SABER LED L  
11381

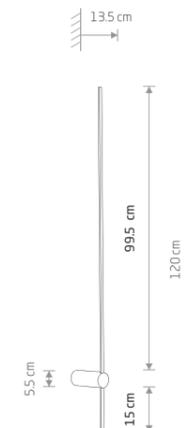

SABER LED L

■ painted aluminum, painted steel, plastic PC

■ 11381 3000K ■ 11382 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11378	11W LED	3000K	380 lm	100°	>90	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h
11380	11W LED	4000K	410 lm	100°	>90	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h
11381	16W LED	3000K	540 lm	100°	>90	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h
11382	16W LED	4000K	570 lm	100°	>90	~220-230 V, 50/60 Hz	■	>0.5	IP20	30000h

SIMONE  
11414

SIMONE  
11412






SIMONE  
11412




SIMONE  
11413

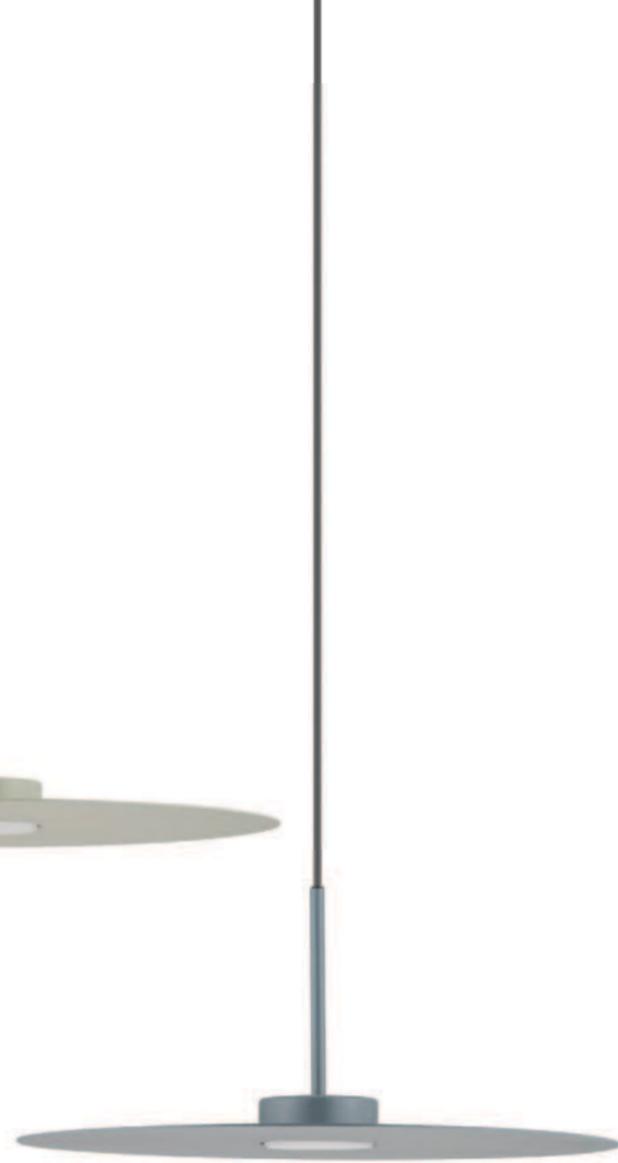

SIMONE  
11414



SIMONE  
11413

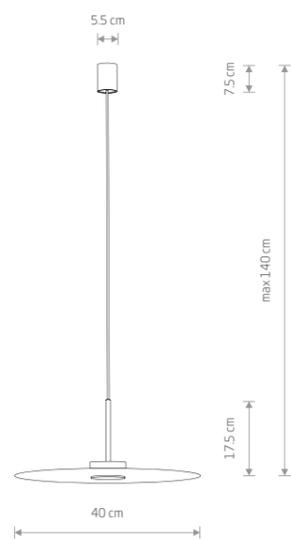

**SIMONE**  
painted steel


■ 11410 ■ 11411 ■ 11412

■ 11413 ■ 11414


● 1xGX53, max 12W only LED

SATELLITE M  
11232



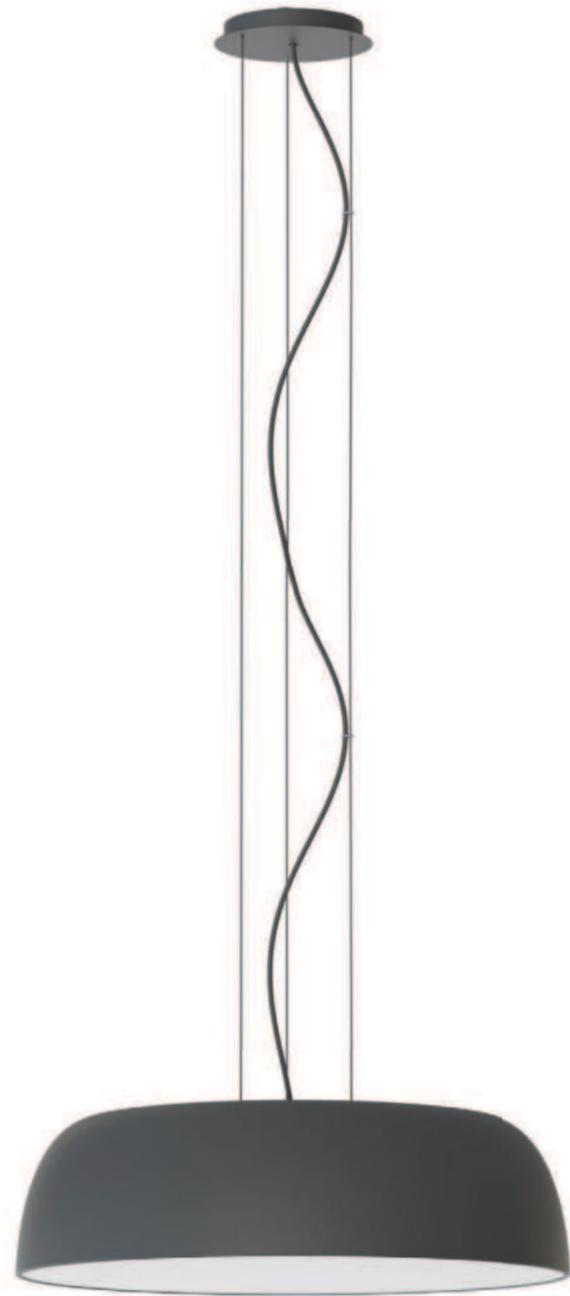

SATELLITE M  
11232

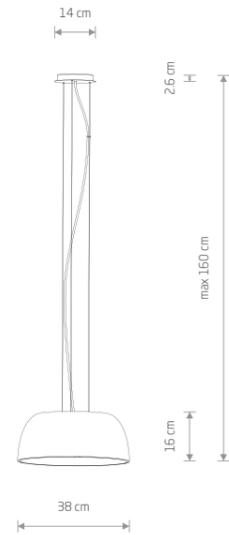


### SATELLITE S

painted steel, plastic

■ 11225 □ 11228

■ 11226 ■ 11227

● 3xE27, max 25W only LED

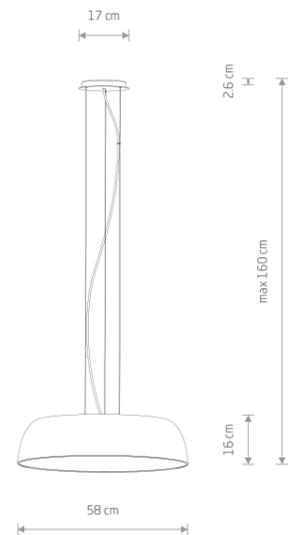

### SATELLITE M

painted steel, plastic

■ 11230 □ 11233

■ 11231 ■ 11232


● 7xE27, max 25W only LED



SATELLITE M  
11232



CTLS SNOWBALL  
11296




### CTLS SNOWBALL


plastic PC, glass, painted steel

■ 11296

● 1xG9, max 12W only LED

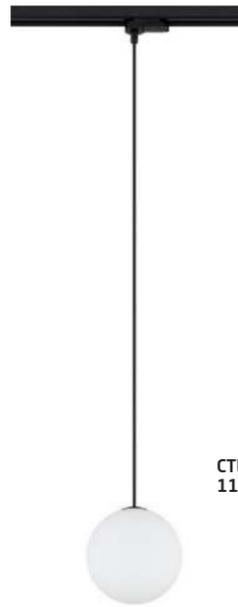

CTLS SNOWBALL  
11295

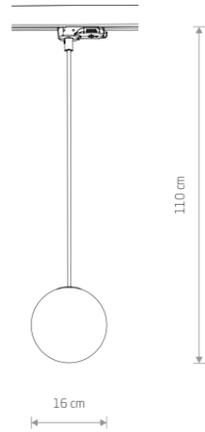

### CTLS SNOWBALL


plastic PC, glass, painted steel

■ 11295

● 1xG9, max 12W only LED



PROFILE SNOWBALL  
11298




### PROFILE SNOWBALL


plastic PC, glass, painted steel

■ 11298

● 1xG9, max 12W only LED

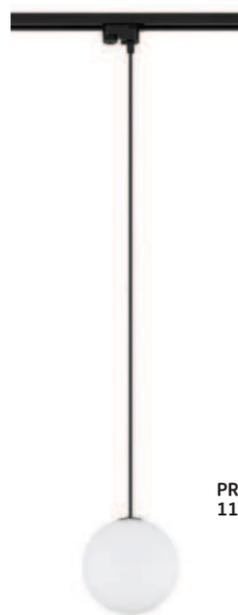

PROFILE SNOWBALL  
11297

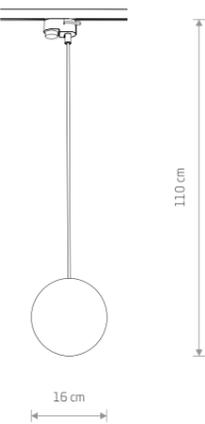


### PROFILE SNOWBALL

plastic PC, glass, painted steel

■ 11297

● 1xG9, max 12W only LED

SNOWBALL XIV  
11408

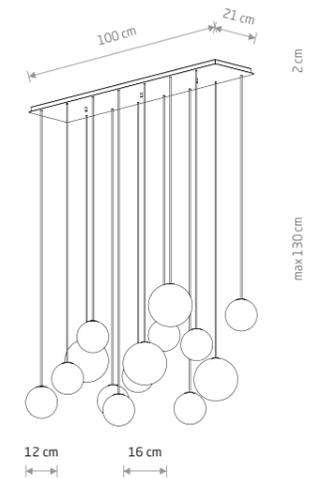

### SNOWBALL XIV

painted steel, glass

■ 11408


● 14xG9, max 12W only LED

AGNES ROUND LED PRO  
10979

AGNES ROUND LED PRO  
10981



**AGNES ROUND LED PRO**  
10980




**AGNES ROUND LED PRO**

painted steel, plastic PMMA

10977 3000K ■ 10971 3000K

10978 4000K ■ 10972 4000K

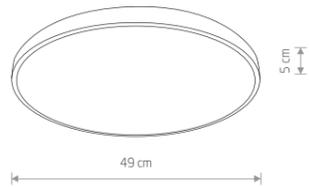


**AGNES ROUND LED PRO**

painted steel, plastic PMMA

10979 3000K ■ 10973 3000K

10980 4000K ■ 10974 4000K

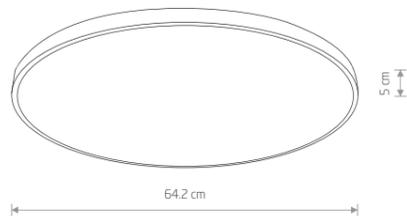

**AGNES ROUND LED PRO**


painted steel, plastic PMMA

10981 3000K ■ 10975 3000K

10982 4000K ■ 10976 4000K



**AGNES SQUARE LED PRO**  
10987

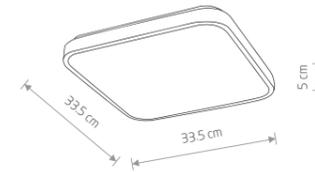


**AGNES SQUARE LED PRO**

painted steel, plastic PMMA

10989 3000K ■ 10983 3000K

10990 4000K ■ 10984 4000K

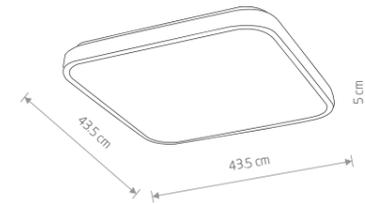


**AGNES SQUARE LED PRO**

painted steel, plastic PMMA

10991 3000K ■ 10985 3000K

10992 4000K ■ 10986 4000K

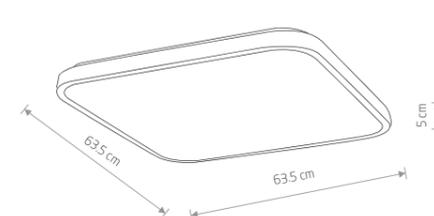

**AGNES SQUARE LED PRO**

painted steel, plastic PMMA

10993 3000K ■ 10987 3000K

10994 4000K ■ 10988 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10971	22W LED	3000K	1600 lm	120°	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10972	22W LED	4000K	1800 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10973	32W LED	3000K	2600 lm	120°	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10974	32W LED	4000K	2700 lm	120°	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10975	64W LED	3000K	5600 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10976	64W LED	4000K	5900 lm	120°	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10977	22W LED	3000K	1800 lm	120°	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10978	22W LED	4000K	2000 lm	120°	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10979	32W LED	3000K	2800 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10980	32W LED	4000K	3000 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10981	64W LED	3000K	5800 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10982	64W LED	4000K	6200 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10983	16W LED	3000K	1200 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10984	16W LED	4000K	1300 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10985	32W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10986	32W LED	4000K	2800 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10987	64W LED	3000K	5600 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10988	64W LED	4000K	6000 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10989	16W LED	3000K	1400 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10990	16W LED	4000K	1500 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10991	32W LED	3000K	2900 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10992	32W LED	4000K	3100 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10993	64W LED	3000K	6100 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10994	64W LED	4000K	6500 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h

WHITE ■ BLACK

WHITE ■ BLACK



NIKKI ROUND LED  
11202

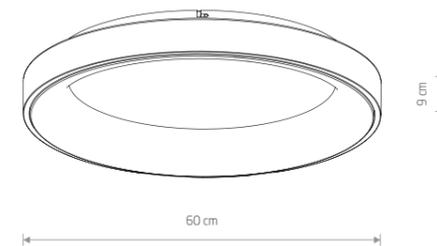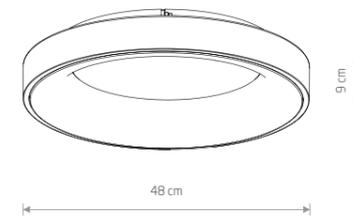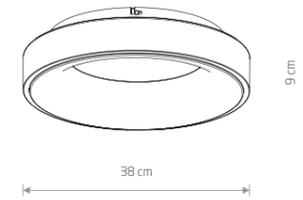

### NIKKI ROUND LED

Painted steel, plastic PMMA

11200 3000K 11206 3000K

11203 4000K 11210 4000K



### NIKKI ROUND LED

Painted steel, plastic PMMA

11201 3000K 11207 3000K

11204 4000K 11211 4000K



### NIKKI ROUND LED

Painted steel, plastic PMMA

11202 3000K 11208 3000K

11205 4000K 11212 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
11200	32W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11201	48W LED	3000K	4200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11202	60W LED	3000K	5400 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11203	32W LED	4000K	2800 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11204	48W LED	4000K	4300 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11205	60W LED	4000K	5600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11206	32W LED	3000K	2600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11207	48W LED	3000K	4000 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11208	60W LED	3000K	5200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11210	32W LED	4000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11211	48W LED	4000K	4200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11212	60W LED	4000K	5400 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h


☐ WHITE    ☐ BLACK

OUTLINE LED L  
11362







OUTLINE LED S  
11360



OUTLINE LED S  
painted aluminum, plastic PC

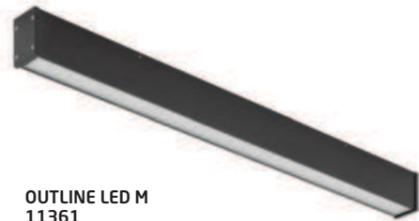


OUTLINE LED M  
11361

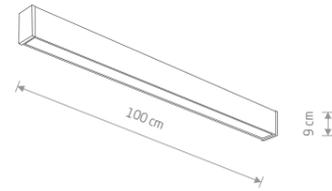

OUTLINE LED M  
painted aluminum, plastic PC



OUTLINE LED L  
11362

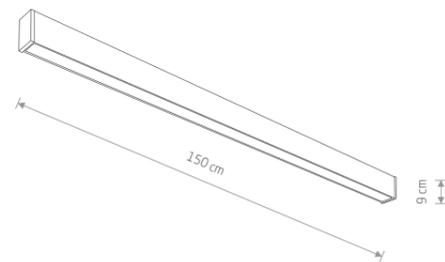

OUTLINE LED L  
painted aluminum, plastic PC




OUTLINE LED S  
11360

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11360	20W LED	3000K	1200 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h
11361	35W LED	3000K	1800 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h
11362	50W LED	3000K	3000 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h



SLIT LED  
11376

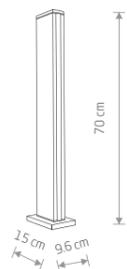

### SLIT LED

■ painted aluminum, plastic PC

■ 11376



MIA LED M  
11374




### MIA LED M

■ painted aluminum, plastic PC

■ 11374



MIA LED L  
11375

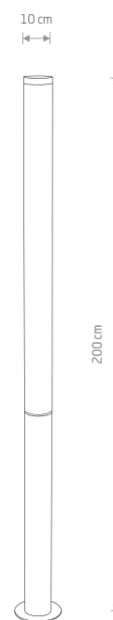

### MIA LED L

■ painted aluminum, plastic PC

■ 11375



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11376	12w LED	3000K	600 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11374	30w LED	3000K	2500 lm	70°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h
11375	100w LED	3000K	7800 lm	70°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h

■ BLACK



MIA LED M  
11374



IDA  
11373


IDA

■ painted aluminum, glass

■ 11371

🔌 1xE27, max 10W LED

IP44

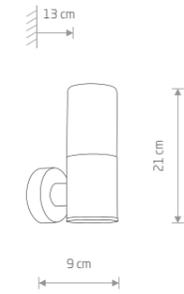

IDA  
11371




IDA

■ painted aluminum, glass

■ 11372

🔌 2xE27, max 10W LED

IP44

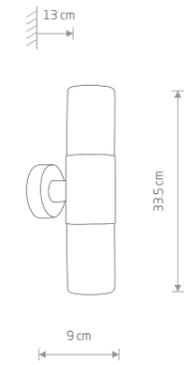

IDA  
11372



IDA

■ painted aluminum, glass

■ 11373

🔌 1xE27, max 10W LED

IP44



IDA  
11373






NEL LED  
11368




NEL LED  
11370



**NEL LED**

■ painted aluminum, glass

■ 11368



**NEL LED**

■ painted aluminum, glass


■ 11370



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11368	5W LED	3000K	500 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11370	2x5W LED	3000K	880 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h

SEMI LED S  
11363

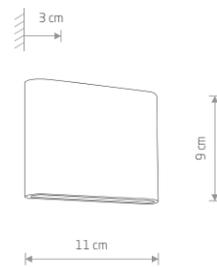

**SEMI LED S**  
painted aluminum, glass  
■ 11363 ■ 11365  
P

SEMI LED M  
11366

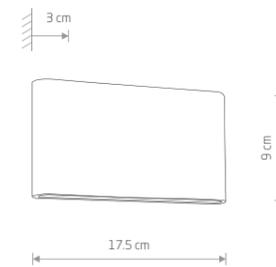

**SEMI LED M**  
painted aluminum, glass  
■ 11364 ■ 11366  
P


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11363	2x3W LED	3000K	300 lm	40°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11365	2x3W LED	3000K	300 lm	40°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11364	2x5W LED	3000K	500 lm	40°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11366	2x5W LED	3000K	500 lm	40°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h




CLINE LED  
11377

OUTLINE LED M  
11361

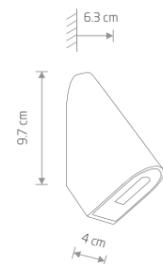

CLINE LED  
painted aluminum, glass

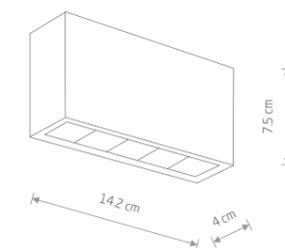


PIX LED  
painted aluminum, glass



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11377	3W LED	3000K	130 lm	80°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11367	10W LED	3000K	500 lm	30°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h

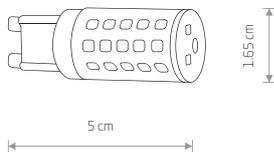

## BULB LED G9, 4W

plastic PC

7503 3000K 7504 4000K



## REFLECTOR LED, GU10, R50, 7W, DIMMABLE

plastic PC

10996 3000K 10995 3000K  
10998 4000K 10997 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
10995	7W LED	3000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10996	7W LED	3000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10997	7W LED	4000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10998	7W LED	4000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
7503	4W LED	3000K	380 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	25000h
7504	4W LED	4000K	390 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	25000h

WHITE BLACK



**Nowodvorski**  
LIGHTING



Nowodvorski sp.j.  
ul. Bojemskiego 11  
42-202 Częstochowa  
POLAND



+48 34 344 91 10 / 11



+48 34 344 91 12



nowodvorski@nowodvorski.com



www.nowodvorski.com





[www.nowodvorski.com](http://www.nowodvorski.com)